


DEENDAYAL PORT AUTHORITY

E - Tender Notice No. HD - 16/23

Name of work : Providing RCC Cable Trench for Electric Cables inside Cargo Jetty Area.

CORRIGENDUM - II

Sr. No.	Item No.	Old Description	Corrected Description
1	Schedule B Item No. 6	Providing and laying in position machine batched and machine mixed design mix M-30 grade cement concrete for reinforced cement concrete work, using cement content as per approved design mix, including pumping of concrete to site of laying but excluding the cost of centering, shuttering, finishing and reinforcement, including admixtures in recommended proportions as per IS: 9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer-in-charge.	Providing and laying in position machine batched and machine mixed design mix M-30 grade cement concrete for reinforced cement concrete work, using cement content as per approved design mix, including pumping of concrete to site of laying but including the cost of centering, shuttering, finishing and reinforcement, including admixtures in recommended proportions as per IS: 9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer-in-charge.
(i)		RAFT including Shuttering	RAFT including Shuttering
(ii)		RCC WALL including Shuttering	RCC WALL including Shuttering

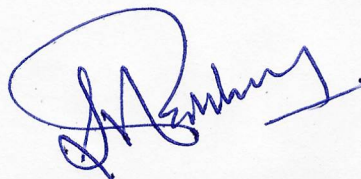

**EXECUTIVE ENGINEER (HARBOUR)
DEENDAYAL PORT AUTHORITY**

DEENDAYAL PORT AUTHORITY

HARBOUR DIVISION

ONLINE TENDERING (E - TENDERING)

TENDER NOTICE NO. : HD : 16/23

Name of Work : Providing RCC Cable Trench for Electric Cables inside Cargo Jetty Area.

CORRIGENDUM – I

Amendment in Schedule – B (BOQ) as under :

Schedule B (Bill of Qty.)		As per Schedule B (Bill of Qty.) Unit	Amended Schedule B (Bill of Qty.) Unit
Item No.	Description		
11.	Providing & fixing HDPE pipe in RCC road surface by dismantling the concrete surface upto 250 mm deep and upto 300 mm wide. After fixing HDPE pipe in concreted surface the surface should be concreted with M-40 grade of concrete etc complete including cost of all labour, material as directed by Engineer-in-charge.		
	110 mm Dia. HDPE pipe.	M ³	Mtr.
	150 mm Dia. HDPE pipe.	M ³	Mtr.

Note : All bidders are requested to submit & upload the Certificate stating that they have gone through all the Corrigendum and submit all the copy of all Corrigendum duly signed & stamped along-with Tender Document.

**Executive Engineer (H)
Deendayal Port Authority**