

Office of the Executive Engineer,  
Harbour Division, Nirman Building,  
New Kandla (Kutch), Gujarat-370210.



Tel : (02836) 270325  
FAX : (02836) 270429

Email ID :- [kphdivision@gmail.com](mailto:kphdivision@gmail.com)

ISO 9001:2008 ISO 14001:2004

No:HW/WK/EOI/

Dated : 27/02/2025

To,

## **Expression of Interest**

Sub. : Rectification of damage caused to plots including maintenance of Road & Plots inside cargo jetty area.

Sir,

Deendayal Port Authority intends to invite e-tender for the subject work.


Kindly submit your budgetary-offer for the subject work on the basis of tentative requirements of items execute for work enclosed herewith.

The rates quoted must be inclusive of all taxes, & exclusive of GST.

Your budgetary offer for the above work should reach to the above mentioned address on or before 07/03/2025.

Thanking you,

Encl. : As above

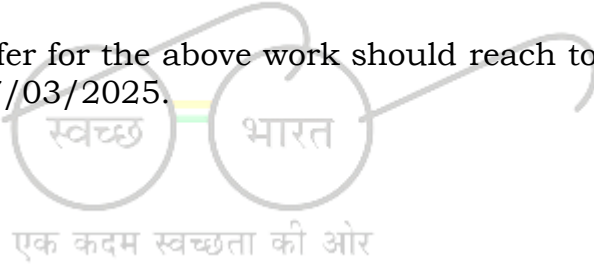

Yours faithfully,

Executive Engineer (H)  
Deendayal Port Authority

**Date :-**

**To,**  
**The Executive Engineer (H)**  
**Deendayal Port Authority**  
**New Kandla**

**Sub. : Budgetary offer for the work of "Rectification of damage caused to plots including maintenance of Road & Plots inside cargo jetty area.**

<b>Sr. No.</b>	<b>Item Description</b>	<b>Rate (in Rs.)</b>	<b>Qty</b>	<b>Unit</b>
1	Construction of granular sub - base by providing, laying, spreading and compacting CLOSE/ COARSE GRADED MATERIAL spreading in uniform layers of 150 to 200mm thick with motor grader on prepared surface and compacting with power vibratory roller of required type and capacity to achieve the desired density including all labour, watering, material , machinery, lighting, guarding, barricading complete as directed.(Mix in place method). (With material conforming to Grade-I (size range 75 mm to 0.075 mm) having CBR Value-30)		26456	Cu M
2	Providing, laying, spreading and compacting graded stone aggregate (size range 53 mm to 0.075 mm) to wet mix macadam (WMM) specification including premixing the material with water at OMC in for all leads & lifts, laying in uniform layers of 100 to 150 mm thick with mechanical Grader finisher in sub-base / base course on well prepared surface and compacting with vibratory roller of 8 to 10 tonne capacity to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge.		18945	Cu M

Note : Rates shall be exclusive of GST