

DEENDAYAL PORT AUTHORITY

(Erstwhile: DEENDAYAL PORT TRUST)

Tel(O) : (02836) 220038,
Fax : (02836) 220050
E Mail : kptdesignsection@gmail.com
Website: www.deendayalport.gov.in



Administrative Office Building
Post Box NO. 50
GANDHIDHAM (Kutch).
Gujarat: 370 201.
Fax: (02836) 220050
Ph.: (02836) 220038

www.deendayalport.gov.in

Ref: - EG/WK/4684(EC)/Part VII/ 15

Date: 09/01/2026

To,
Shri M. C. Macwana,
Kutch Unit Head,
Gujarat Pollution Control Board,
Paryavaran Bhavan, Sector 10A,
Gandhinagar- 382 010 Email-kut-uh-gpcb@gujarat.gov.in

Sub: "Creation of water front facilities (Oil Jetties 8, 9, 10 & 11) and development of land of area 554 acres for associated facilities for storage at Old Kandla, Gandhidham, Kutch, Gujarat by M/s Deendayal Port Authority (Erstwhile: Deendayal Port Trust)- **Submission of Point-wise Compliance of Conditions stipulated in the NOC/CTE reg.**

Ref.:

- 1) NOC No. 94118 received vide letter no. PC/CCA-Kutch-1524/GPCB ID 56985 Dated 23/07/2018.
- 2) Extension and Correction to CTE issued by GPCB vide PC/CCA-Kutch-1524/GPCB ID 56985 Dated 30/09/2023 valid upto 19/11/2030
- 3) DPT Letter No. EG/WK/4684(EC)/PartVII/29 dated 29/06/2021
- 4) DPT Letter No. EG/WK/4684(EC)/PartVII/141 dated 08/02/2022
- 5) DPA letter No. EG/WK/4684(EC)/PartVII/129 dated 30/06/2022
- 6) DPA letter No. EG/WK/4684(EC)/PartVII/297 dated 05/05/2023
- 7) DPA letter No. EG/WK/4684(EC)/PartVII/362 dated 18/09/2023
- 8) DPA letter No. EG/WK/4684(EC)/PartVII/45 dated 27/03/2024
- 9) DPA letter No. EG/WK/4684(EC)/PartVII/114 dated 12/08/2024
- 10) DPA letter No. EG/WK/4684(EC)/PartVII/18 dated 03/02/2025
- 11) DPA letter No. EG/WK/4684(EC)/PartVII/24 dated 18/06/2025

Sir,

It is requested to kindly refer above cited references for the said subject.

In this connection, it is to state that, vide above referred Letter No- PC/CCA-Kutch-1524/GPCB ID 56985 Dated 23/07/2018 had granted NOC/CTE with validity up to 03/04/2023. And further issued extension to the CTE vide PC/CCA-Kutch-1524/GPCB 56985 dated 30/09/2023 valid upto 19/11/2030.

DPA vide above mentioned letters had submitted the compliance report of condition stipulated in CTE/NOC to the GPCB.

Now, please find enclosed herewith, compliance report of conditions stipulated in CTE order (period **April 2025 to September, 2025**) along with necessary enclosures as **Annexure I**, for your kind perusal & record please.

Further, as per the MoEF&CC, Notification S.O.5845 (E) dated 26.11.2018, stated that "***In the said notification, in paragraph 10, in sub-paragraph (ii), for the words "hard and soft copies" the words "soft copy" shall be substituted.*** Accordingly, we are submitting herewith soft copy of the same via e-mail ID kut-uh-gpcb@gujarat.gov.in.

This has approval of the Chief Engineer, Deendayal Port Authority.

Yours faithfully,



XEN (EMC)
Deendayal Port Authority

Copy to : Regional Officer, (Kutch East)
Gujarat Pollution Control Board,
Room No. 215 – 217, Regional Office,
2nd Floor, A.O Building,
Deendayal Port Trust,
Gandhidham (Kutch)- 370 201
Email Id. ro-gpcb-kute@gujarat.gov.in

Annexure – I

Point wise compliance

CURRENT STATUS OF WORK PROGRESS (Up to September, 2025)

Sr.No	Name of Project	Status
1	Oil Jetty No. 8 (Jetty & allied facilities)	Construction work is completed
2	Oil Jetties no. 9, 10 & 11 to be implemented on BOT/PPP Mode.	<ul style="list-style-type: none"> • The SFC recommendation and the MoPSW, GoI approval for Oil Jetties 9, 10 & 11, under PPP mode, has been received on 19/04/2021. • The bid for OJ – 09 is invited fourth time. In the meeting with MoPSW, GoI, it was decided that project may be restructured, if bids are not received. • For Restructured project proposal for OJ 9, 10 & 11 (PPP Mode), the SFC meeting was held on 04/06/2024. Approval is awaited. • As directed by the competent authority of DPA, the subject project i.e OJ 9,10, 11 now to be implemented under EPC mode. MoPSW initiated regarding same. • No construction activity started yet on project site. • The Notice Inviting Tender (NIT) for the work of "Construction of Oil OJ No. 9 at Kandla" was issued and scheduled for opening on 22.12.2025.
3	Development of Land (area 554 acres) for associated facilities for storage.	Initially, partial development of embankment for road network along with reclamation of Land is undertaken.

Compliance Report for period April 2025 to September 2025

Subject: Point wise compliance report of conditions stipulated in the NOC/CTE issued by GPCB for the project "Creation of water front facilities (Oil Jetties 8, 9, 10 & 11) and development of land of area 554 acres for associated facilities for storage at Old Kandla, Gandhidham, Kutch, Gujarat by M/s Deendayal Port Authority.

Reference: NOC No. 94118 received vide letter no. PC/CCA-Kutch-1524/GPCB ID 56985 dated 23/07/2018 and its extension and correction issued by GPCB vide PC/CCA-Kutch-1524/GPCB ID 56985 dated 30/09/2023 valid upto 19/11/2030

Sr. No	Conditions	Compliance Status										
1	Specific Conditions											
1	Proposed jetties shall be handled of 3.5 MMTPA of liquid Cargo of edible oil, Fertilizers & food grains. etc	As per Environmental Clearance granted by MoEF&CC dated 20.11.2020, "the capacity of each jetty is 3.5 MMTPA for handling all types of Liquid Cargo". (Correction in CTE order issued by GPCB vide PC/CCA-Kutch-1524/GPCB ID 56985 dated 30/09/2023) the same has already been submitted along with compliance report submitted on 27/03/2024.										
2.	Unit shall strictly adhere to all conditions of TOR issued by MoEF&CC, Delhi dated 04/07/2017 & Shall not carry out any construction activities till obtaining EC and CRZ from competent authority	DPA has already received the EC and CRZ clearance from MoEF&CC vide file no. 10- 1/2017-1A-111 dated 20/11/2020 and CRZ recommendation from GCZMA vide letter no. ENV-10-2018-24-T cell dated 30/07/2020. Copy also submitted in the compliance report submitted on 05/05/2023										
3.	No ground water shall be used for the project coming under dark zone without permission of competent authority.	DPA is not using ground water for any of the purpose										
2	Conditions Under Water Act											
2.1	There shall be no Industrial water consumption and hence there shall be no generation from manufacturing process and other ancillary industrial operations.	It is hereby assured that Water is used only for the domestic purpose and there is no Industrial water consumption and no waste water generation from the Industrial purpose.										
2.2	Domestic water Consumption shall not exceed 20 KL/day	Point noted for the compliance.										
2.3	The quantity of domestic waste water (sewage) shall not exceed 16 KL/day	Point noted for the compliance.										
2.4	The quality of the sewage shall conform to the following standards	Point noted for the compliance.										
	<table border="1"> <tr> <th>Parameters</th><th>Permissible Limit</th></tr> <tr> <td>pH</td><td>6.5-9.0</td></tr> <tr> <td>BOD (5 days at 20 °C)</td><td>30 mg/lit</td></tr> <tr> <td>Suspended Solid</td><td>20 mg/lit</td></tr> <tr> <td>Fecal Coliform</td><td>1000 MPN/100 ml</td></tr> </table>	Parameters	Permissible Limit	pH	6.5-9.0	BOD (5 days at 20 °C)	30 mg/lit	Suspended Solid	20 mg/lit	Fecal Coliform	1000 MPN/100 ml	
Parameters	Permissible Limit											
pH	6.5-9.0											
BOD (5 days at 20 °C)	30 mg/lit											
Suspended Solid	20 mg/lit											
Fecal Coliform	1000 MPN/100 ml											
2.5	The domestic sewage shall be treated in sewage treatment plant and treated sewage confirming to standard mentioned in 2.4 shall be reused in various activities shall not be used for gardening and plantation purpose in premises.	Generated waste water from the oil jetty no. 8 will be treated in septic tank/soak pit. However, after completion of entire project facility (Oil Jetties 8 to 11 & associated area for storage), possibility may be explored to treat the waste water generation (about 16 KLD) through existing STP of DPA										
3	Conditions under air act 1981:											
3.1	There shall be no use of fuel; hence there is no flue gas emission from manufacturing activities and other ancillary operations.	No fuel is being used; hence there is no flue gas emission from manufacturing activities and other ancillary operations.										

3.2	There shall be no process gas emission from manufacturing and other ancillary activities.	No manufacturing process is involved and hence there is no process gas emission from manufacturing and other ancillary activities.															
3.3	The concentration of the following parameters in the ambient air within the premises of the industry shall not exceed the limits specified hereunder as per National Ambient Air Quality Emission Standards issued by Ministry of Environment, Forest and Climate Change dated 16 th November 2009.	<p>DPA appointed NABL Accredited laboratory for regular Monitoring of environmental parameters since the year 2016 in continuation of this DPA appointed M/s Gujarat Environment Management Institute (GEMI), Gandhinagar (NABL Accredited laboratory) for regular Monitoring of environmental parameters vide work order dated 15/02/2023. The work is in progress & DPA is submitting the monitoring data regularly to all the concerned authorities along with compliance reports submitted.</p> <p>Copy of Latest monitoring report is attached herewith as Annexure A</p> <p>DPA has assigned the work to GUIDE, Bhuj through a Continuous Ambient Air Quality Monitoring System (CAAQMS), vide Work Order No. CivilEng./Pipeline/4778/CAAQMS/205/27 dated 24.06.2025, issued on a nomination basis. A copy of the said work order is enclosed herewith as Annexure-B.</p>															
	<table border="1"> <thead> <tr> <th>Parameters</th><th>Time Weighted Average</th><th>Concentration in Ambient air in $\mu\text{g}/\text{m}^3$</th></tr> </thead> <tbody> <tr> <td>Sulphur Dioxide (SO_2)</td><td>Annual 24 Hours</td><td>50 80</td></tr> <tr> <td>Nitrogen Dioxide (NO_2)</td><td>Annual 24 Hours</td><td>40 80</td></tr> <tr> <td>Particulate Matter (Size less than $10\mu\text{m}$)</td><td>Annual 24 Hours</td><td>60 100</td></tr> <tr> <td>Particulate Matter (Size less than $2.5\mu\text{m}$) or $\text{PM}_{2.5}$</td><td>Annual 24 Hours</td><td>40 60</td></tr> </tbody> </table>	Parameters	Time Weighted Average	Concentration in Ambient air in $\mu\text{g}/\text{m}^3$	Sulphur Dioxide (SO_2)	Annual 24 Hours	50 80	Nitrogen Dioxide (NO_2)	Annual 24 Hours	40 80	Particulate Matter (Size less than $10\mu\text{m}$)	Annual 24 Hours	60 100	Particulate Matter (Size less than $2.5\mu\text{m}$) or $\text{PM}_{2.5}$	Annual 24 Hours	40 60	
Parameters	Time Weighted Average	Concentration in Ambient air in $\mu\text{g}/\text{m}^3$															
Sulphur Dioxide (SO_2)	Annual 24 Hours	50 80															
Nitrogen Dioxide (NO_2)	Annual 24 Hours	40 80															
Particulate Matter (Size less than $10\mu\text{m}$)	Annual 24 Hours	60 100															
Particulate Matter (Size less than $2.5\mu\text{m}$) or $\text{PM}_{2.5}$	Annual 24 Hours	40 60															
3.4	The level of Noise in ambient air within the premises of industrial unit shall not exceed following levels:; Between 6 A.M and 10 P.M : 75 dB(A) Between 10 A.M and 6 P.M : 70 dB(A)	<p>DPA appointed NABL Accredited laboratory for regular Monitoring of environmental parameters since the year 2016 in continuation of this DPA appointed M/s Gujarat Environment Management Institute (GEMI), Gandhinagar (NABL Accredited laboratory) for regular Monitoring of environmental parameters vide work order dated 15/02/2023. The work is in progress & DPA is submitting the monitoring data regularly to all the concerned authorities along with compliance reports submitted.</p> <p>Copy of Latest monitoring report is attached herewith as Annexure A</p>															
4	Conditions under Hazardous waste:																
4.1	The applicant shall provide temporary storage facilities for each type of Hazardous waste as per Hazardous waste (Management, Handling & Trans boundary Movement) Rules, 2016 as amended from time to time.	Point Noted for the Compliance. DPA has a contract with the GPCB/CPCB authorized Recycler for disposal of Haz. Waste.															
4.2	The applicant shall be obtain membership of common TSDF site for disposal of Hazardous waste as Categorized in Hazardous waste (Management, Handling & Transboundary Movement) Rules, 2016 as amended from time to time	Not applicable															

5	General Conditions	
5.1	Any change in the personnel, equipment or working conditions as mentioned in the consents form/order should immediately be intimated to this Board.	Point noted for the compliance.
5.2	The waste generator shall be totally responsible for (i.e Collection, Storage, transportation and ultimate disposal) of the wastes generated.	Point noted for the compliance.
5.3	Record of Waste generation, its management and annual return shall be submitted to Gujrat pollution Control Board in Form-4 by 31 st January of every year.	Point noted for the compliance
5.4	In case of any accident, details of the same shall be submitted in Form-5 to Gujrat pollution Control Board	Point noted for the compliance.
5.5	Applicant shall comply relevant provision of "Public Liability Insurance Act-91"	Point noted for the compliance.
5.6	Unit shall take all concrete measures to show tangible results in waste generation, reduction, avoidance, reuse and recycle. Action taken in this regard shall be submitted within three months and also along with Form-4.	Point noted for the compliance.
5.7	Industry shall have to display on-line data outside the main factory gate with regard to quantity and nature of hazardous chemicals being handled in the plant, including waste water and air emissions and solid hazardous waste generated within the factory premises.	Point noted for the compliance.
5.8	Adequate plantation shall be carried out all the periphery of the industrial premises in such a way that the density of plantation is at least 1000 trees per acre of land and a green belt of 10 meters width shall be developed	Point noted for the compliance.
5.9	The applicant shall have to submit the returns in prescribed form regarding water consumption and shall have to make payment of water cess to the Board under the water (Prevention and Control of Pollution) Cess Act - 1977	<p>The construction activity Construction of Oil Jetty No. 8 completed and partial development of embankment for road network along with reclamation of Land has been undertaken. Accordingly, DPA had obtained the CCA (AWH – 136469) from the GPCB vide letter PC/CCA-KUTCH-1524/GPCB ID 56985 dated 20/08/2024 for the same (Copy attached – Annexure C). Return will be submitted for the FY 2024-2025.</p> <p>However, for remaining works to be undertaken (Construction of OJ 9 , 10 & 11 and development of Land), it is assured that no activity other than those permissible in Coastal Regulation Notification shall be carried out in the CRZ area.</p>

Annexure - A

Environmental Monitoring Report (EMR)

prepared under

“Preparing and monitoring of environmental monitoring and management plan for Deendayal Port Authority at Kandla and Vadinar for a period of 3 years”

(Monitoring Period: September-October 2025)



Document Ref No.: GEMI/DPA/782(2)(6)/2025/63

Submitted to:

Deendayal Port Authority (DPA), Kandla



Gujarat Environment Management Institute (GEMI)

(An Autonomous Institute of Government of Gujarat)

GEMI Bhavan, 246-247, GIDC Electronic Estate, Sector-25, Gandhinagar-382025

“AN ISO 9001:2015, ISO 14001:2015 AND ISO 45001:2018 Certified Institute”



© Gujarat Environment Management Institute (GEMI)

All rights reserved. This "Environment Monitoring Report (September-October 2025)" is prepared as a part of the project "Preparing and monitoring of Environmental monitoring and Management plan for Deendayal Port Authority at Kandla and Vadinar for a period of 3 years". No part of this report may be reproduced, distributed or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior permission of Director, Gujarat Environment Management Institute (GEMI).

Disclaimer:

Gujarat Environment Management Institute (GEMI) has taken all reasonable precautions in the preparation of this report. The data presented in this report have been collected as per the relevant Standard Operating Procedures, Protocols and Guidelines. GEMI believes that the information and facts presented in the report are accurate as on the date it was written. However, it is impossible to dismiss absolutely, the possibility of errors or omissions. GEMI therefore specifically disclaims any liability resulting from the use or application of the information contained in this report. The information is not intended to serve as legal advice related to the individual situation.

About this Document

Gujarat Environment Management Institute (GEMI) has been assigned with the work of "Preparing and monitoring of Environmental monitoring and Management plan for Deendayal Port Authority (DPA) at Kandla and Vadinar for a period of 3 years" by DPA, Kandla. Under the said project the report titled "*Environment Monitoring Report (September-October 2025)*" is prepared.

- **Name of the Report:** *Environment Monitoring Report (September-October 2025)*
- **Date of Issue:** 17/12/2025
- **Version:** 1.0
- **Report Ref.:** GEMI/DPA/782(2)(6)/2025/63

Table of Contents

CHAPTER 1: INTRODUCTION.....	1
1.1 Introduction	2
1.2 Green Ports Initiative.....	2
1.3 Importance of EMP	3
1.4 Objectives and scope of the Study	4
CHAPTER 2: METHODOLOGY.....	6
2.1 Study Area	7
a. Kandla.....	7
b. Vadinar	7
2.2 Environmental Monitoring at Kandla and Vadinar.....	11
CHAPTER 3: METEOROLOGY MONITORING.....	13
3.1 Meteorology Monitoring.....	14
3.2 Results and discussion	16
3.3 Data Interpretation and Conclusion.....	17
CHAPTER 4: AMBIENT AIR QUALITY MONITORING	20
4.1 Ambient Air Quality	21
4.2 Result and Discussion	27
4.3 Data Interpretation and Conclusion.....	33
4.4 Remedial Measures:.....	35
CHAPTER 5: DG STACK MONITORING	37
5.1 DG Stack Monitoring.....	38
5.2 Result and Discussion	41
5.3 Data Interpretation and Conclusion.....	41
CHAPTER 6: NOISE MONITORING.....	42
6.1 Noise Monitoring	43
6.2 Result and Discussion	47
6.3 Data Interpretation and Conclusion.....	48
6.4 Remedial Measures.....	48
CHAPTER 7: SOIL MONITORING.....	49
7.1 Soil Quality Monitoring:	50
7.2 Result and Discussion	54

7.3	Data Interpretation and Conclusion.....	54
CHAPTER 8: DRINKING WATER MONITORING		57
8.1	Drinking Water Monitoring.....	58
8.2	Result and Discussion	63
8.3	Data Interpretation and Conclusion.....	65
8.4	Remedial Measures.....	67
CHAPTER 9: SEWAGE TREATMENT PLANT MONITORING		68
9.1	Sewage Treatment Plant (STP) Monitoring:.....	69
9.2	Result and Discussion	75
9.3	Data Interpretation and Conclusion.....	76
9.4	Remedial Measures:.....	77
CHAPTER 10: MARINE WATER QUALITY MONITORING.....		79
10.1	Marine Water	80
10.2	Result and Discussion	84
10.3	Data Interpretation and Conclusion.....	86
CHAPTER 11: MARINE SEDIMENT QUALITY MONITORING.....		89
11.1	Marine Sediment Monitoring.....	90
11.2	Result and Discussion	93
11.3	Data Interpretation and Conclusion.....	94
CHAPTER 12: MARINE ECOLOGY MONITORING		98
12.1	Marine Ecological Monitoring.....	99
12.2	Result and Discussion	106
Annexure 1: Photographs of the Environmental Monitoring conducted at Kandla		115
Annexure 2: Photographs of the Environmental Monitoring conducted at Vadinar.....		116

List of Tables

Table 1: Details of Automatic Weather Station.....	14
Table 2: Automatic Weather Monitoring Station details.....	14
Table 3: Meteorological data for Kandla and Vadinar.....	16
Table 4: Details of Ambient Air monitoring locations.....	21
Table 5: Parameters for Ambient Air Quality Monitoring.....	27
Table 6: Summarized results of PM ₁₀ , PM _{2.5} , SO ₂ , NO _x , VOC and CO for Ambient Air quality monitoring.....	27
Table 7: Summarized results of Benzene for Ambient Air quality monitoring	33
Table 8: Summarized results of Polycyclic Aromatic Hydrocarbons	33

Table 9: Summarized results of Non-methane VOC.....	33
Table 10: Details of DG Stack monitoring locations.....	38
Table 11: DG stack parameters.....	41
Table 12: DG monitoring data.....	41
Table 13: Details of noise monitoring locations	43
Table 14: Details of the Noise Monitoring	46
Table 15: Ambient Air Quality norms in respect of Noise	46
Table 16: The Results of Ambient Noise Quality.....	47
Table 17: Details of the Soil quality monitoring	50
Table 18: Soil parameters	51
Table 19: Soil Quality for the sampling period	54
Table 20: Details of Drinking Water Sampling Locations	58
Table 21: List of parameters for Drinking Water Quality monitoring.....	61
Table 22: Summarized results of Drinking Water quality.....	63
Table 23: Details of the monitoring locations of STP	69
Table 24: Treated effluent Standards (as per CC&A of Kandla STP)	69
Table 25: Norms of treated effluent as per CC&A of Vadinar STP.....	72
Table 26: List of parameters monitored for STP's at Kandla and Vadinar	75
Table 27: Water Quality of inlet and outlet of STP of Kandla.....	76
Table 28: Water Quality of inlet and outlet of STP of Vadinar	76
Table 29: Details of the sampling locations for Marine water	80
Table 30: List of parameters monitored for Marine Water.....	83
Table 31: Results of Analysis of Marine Water Sample for the sampling period	85
Table 32: Details of the sampling locations for Marine Sediment.....	90
Table 33: List of parameters to be monitored for Sediments at Kandla and Vadinar	93
Table 34: Summarized result of Marine Sediment Quality	94
Table 35: Standard Guidelines applicable for heavy metals in sediments.....	96
Table 36: Comparison of Heavy metals with Standard value in Marine Sediment	96
Table 37: Details of the sampling locations for Marine Ecological	99
Table 38: List of parameters to be monitored for Marine Ecological Monitoring.....	102
Table 39: Values of Biomass, Net Primary Productivity (NPP), Gross Primary Productivity (GPP), Pheophytin and Chlorophyll for Kandla and Vadinar	107
Table 40: Phytoplankton variations in abundance and diversity in sub surface sampling stations.....	109
Table 41: Species richness Index and Diversity Index in Phytoplankton	110
Table 42: Zooplankton variations in abundance and diversity in sub surface sampling stations.....	110
Table 43: Species richness Index and Diversity Index in Zooplankton.....	111
Table 44: Benthic Fauna variations in abundance and diversity in sub surface sampling....	112
Table 45: Species richness Index and Diversity Index in Benthic Organisms	113

List of Maps

Map 1: Locations of Kandla and Vadinar	8
Map 2: Locations of Kandla Port.....	9
Map 3: Locations of Vadinar Port.....	10
Map 4: Locations for Ambient Air Monitoring at Kandla.....	24
Map 5: Locations for Ambient Air Monitoring at Vadinar	25
Map 6: Locations for DG Stack monitoring at Kandla.....	39
Map 7: Locations for DG Stack monitoring at Vadinar	40
Map 8: Locations for Noise Monitoring at Kandla.....	44
Map 9: Locations for Noise Monitoring at Vadinar	45
Map 10: Locations for Soil Quality Monitoring at Kandla	52
Map 11: Locations for Soil Quality Monitoring at Vadinar	53
Map 12: Locations for Drinking Water Monitoring at Kandla	59
Map 13: Locations for Drinking Water Monitoring at Vadinar.....	60
Map 14: Locations for STP Monitoring at Kandla	73
Map 15: Locations for STP Monitoring at Vadinar	74
Map 16: Locations for Marine Water Monitoring at Kandla	81
Map 17: Locations for Marine Water Monitoring at Vadinar.....	82
Map 18: Location of Marine Sediment Monitoring at Kandla.....	91
Map 19: Locations of Marine Sediment Monitoring at Vadinar.....	92
Map 20: Locations of Marine Ecological Monitoring at Kandla.....	100
Map 21: Locations of Marine Ecological Monitoring at Vadinar	101

List of Figures

Figure 1: Methodology flow chart	12
Figure 2: Photographs of Automatic Weather Monitoring Station at Kandla and Vadinar....	15
Figure 3: Process flow diagram of STP at Kandla	70
Figure 4: Process flow diagram of STP at Gopalpuri.....	71
Figure 5: Process flowchart for the STP at Vadinar.....	72

List of Graphs

Graph 1: Spatial trend in Ambient PM ₁₀ Concentration.....	32
Graph 2: Spatial trend in Ambient PM _{2.5} Concentration	31
Graph 3: Spatial trend in Ambient SO _x Concentration.....	32
Graph 4: Spatial trend in Ambient NO _x Concentration.....	32
Graph 5: Spatial trend in Ambient CO Concentration	32
Graph 6: Spatial trend in Ambient Total VOCs.....	32

List of Abbreviations

A	Acceptable Limits as per IS: 10500:2012
AAQ	Ambient Air Quality
AWS	Automatic Weather monitoring stations
BIS	Bureau of Indian Standards
BOD	Biochemical Oxygen Demand
BQL	Below Quantification Limit
CCA	Consolidated Consent & Authorization
CO	Carbon Monoxide
COD	Chemical Oxygen Demand
CPCB	Central Pollution Control Board
DO	Dissolved Oxygen
DPA	Deendayal Port Authority
EC	Electrical Conductivity
EMMP	Environmental monitoring and Management Plan
EMP	Environment Management Plan
FPS	Fine Particulate Sampler
FY	Financial Year
GEMI	Gujarat Environment Management Institute
IFFCO	Indian Farmers Fertiliser Cooperative Limited
IMD	India Meteorological Department
IOCL	Indian Oil Corporation Limited
LNG	Liquefied Natural Gas
MGO	Marine Gas Oil
MMTPA	Million Metric Tonnes Per Annum
MoEF	Ministry of Environment & Forests
MoEF&CC	Ministry of Environment, Forest and Climate Change
NAAQS	National Ambient Air Quality Standards
NO_x	Nitrogen oxides
NTU	Nephelometric Turbidity Unit
OOT	Off Shore Oil Terminal
OSR	Oil Spill Response
P	Permissible Limits as per IS: 10500:2012
PAH	Poly Aromatic Hydrocarbons
PM	Particulate Matter
PTFE	Polytetrafluoroethylene
RCC	Reinforced Concrete Cement
RDS	Respirable Dust Sampler
SAR	Sodium Adsorption Ratio
SBM	Single Bouy Mooring
SO_x	Sulfur oxides
STP	Sewage Treatment Plant
TC	Total Coliforms
TDS	Total Dissolved Solids
TOC	Total organic Carbon
TSS	Total Suspended Solids
VOC	Volatile Organic Compounds



CHAPTER 1: INTRODUCTION

1.1 Introduction

Kandla Port, also known as the Deendayal Port is a seaport in Kachchh District near the city of Gandhidham in Gujarat state in western India. Located on the Gulf of Kachchh, it is one of major ports on the western coast, and is located at 256 nautical miles southeast of the Port of Karachi in Pakistan and over 430 nautical miles north-northwest of the Port of Mumbai (Bombay). It is the largest port of India by volume of cargo handled. Deendayal Port's journey began in 1931 with the construction of RCC Jetty by Maharao Khengarji. Kandla was constructed in the 1950s as the chief seaport serving western India, after the independence of India. On 31st March 2016, Deendayal Port created history by handling 100 MMT cargo in a year and became the first Major Port to achieve this milestone. Deendayal Port Authority (DPA), India's busiest major port in recent years, is gearing up to add substantial cargo handling capacity with private sector participation. DPA has created new record by handling 137 MMTPA (at Kandla and Vadinar) during the financial year 2022-23. The DPA had commissioned the Off-shore Oil Terminal facilities at Vadinar in the year 1978, for which M/s. Indian Oil Corporation Limited (IOCL) provided Single Bouy Mooring (SBM) system, with a capacity of 54 MMTPA. Further, significant Quantum of infrastructural upgradation has been carried out & excellent maritime infrastructure has been created at Vadinar for the 32 MMTPA Essar Oil Refinery in Jamnagar District.

1.2 Green Ports Initiative

DPA is committed to sustainable development and adequate measures are being taken to maintain the Environmental well-being of the Port and its surrounding environs. Weighing in the environmental perspective for sustained growth, the Ministry of Shipping had started, Project Green Ports" which will help in making the Major Ports across India cleaner and greener. "Project Green Ports" will have two verticals - one is "Green Ports Initiatives" related to environmental issues and second is "Swachh Bharat Abhiyaan".

The Green Port Initiatives include twelve initiatives such as preparation and monitoring plan, acquiring equipment required for monitoring environmental pollution, acquiring dust suppression system, setting up of sewage/waste water treatment plants/ garbage disposal plant, setting up Green Cover area, projects for energy generation from renewable energy sources, completion of shortfalls of Oil Spill Response (OSR) facilities (Tier-I), prohibition of disposal of almost all kind of garbage at sea, improving the quality of harbour wastes etc.

DPA had also appointed GEMI as an Advisor for "Making Deendayal Port a Green Port-Intended Sustainable Development under the Green Port Initiatives. DPA has also signed MoU with Gujarat Forest Department in August 2019 for Green Belt Development in an area of 31.942 Ha of land owned by DPA. The plantation is being carried out by the Social Forestry division of Kachchh.

1.3 Importance of EMP

Port activities can cause deterioration of air and marine water quality in the surrounding areas due to multifarious activities. The pollution problems usually caused by port and harbour activities can be categorized as follows:

1. Air pollutant emissions due to ship emissions, loading and unloading activities, construction emission and emissions due to vehicular movement.
2. Coastal habitats may be destroyed and navigational channels silted due to causeway construction and land reclamation.
3. Deterioration of surface water quality may occur during both the construction and operation phases.
4. Harbour operations may produce sewage, bilge wastes, solid waste and leakage of harmful materials both from shore and ships.
5. Human and fish health may be affected by contamination of coastal water due to urban effluent discharge.
6. Oil pollution is one of the major environmental hazards resulting from port/harbour and shipping operations. This includes bilge oil released from commercial ships handling non-oil cargo as well as the more common threat from oil tankers.
7. Unregulated mariculture activities in the port and harbour areas may threaten navigation safety.

Hence, for the determination of levels of pollution, identification of pollution sources, control and disposal of waste from various point and non-point sources and for prediction of pollution levels for future, regular monitoring and assessment are required during the entire construction and operation phase of a major port. As per the Ministry of Environment, Forest and Climate Change (**MoEF&CC**), The Environmental Management Plan (EMP) is required to ensure sustainable development in the area surrounding the project. Hence, it needs to be an all encompasses plan consist of all mitigation measures for each item wise activity to be undertaken during the construction, operation and the entire life cycle to minimize adverse environmental impacts resulting from the activities of the project. for formulation, implementation and monitoring of environmental protection measures during and after commissioning of projects. The plan should indicate the details of various measures are taken and proposed to be taken for appropriate management of the environment of Deendayal Port Authority.

It identifies the principles, approach, procedures and methods that will be used to control and minimize the environmental and social impacts of operational activities associated with the port. An EMP is a required part of environmental impact assessment of a new port project but could also be evolved for existing ports. It is useful not only during the construction and operational phases of the new port but also for operation of existing ports to ensure the effectiveness of the mitigation measures implemented and to further provide guidance as to the most appropriate way of dealing with any unforeseen impacts.

It is extremely essential that port and harbour projects should have an Environmental Monitoring and Management Plan (EMMP), which incorporates monitoring of Ambient Air, Drinking Water, Noise, Soil, Marine (water, sediment, ecology) quality along with the collection of online meteorological data throughout the duration of the project.

To ensure the effective implementation of the EMP and weigh the efficiency of the mitigation measures, it is essential to undertake environmental monitoring both during construction and operation period. In view of the above, Gujarat Environment Management Institute (GEMI) has been awarded with the work "**Preparing and Monitoring of Environmental Monitoring and Management Plan for Deendayal Port Authority at Kandla and Vadinar for a period of 3 years**" vide letter No. EG/WK/EMC/1023/2011/III/239 dated: 15/02/2023 by DPA.

This document presents the Environmental Monitoring Report (EMR) for Kandla and Vadinar for the environmental monitoring done during the period from 16th September - 15th October 2025.

1.4 Objectives and scope of the Study

In line with the work order, the key objective of the study is to carry out the Environmental Monitoring and preparation the Management Plan for Kandla and Vadinar for a period of 3 years". Under the project, Environmental monitoring refers to systematic assessment of ambient air, water (drinking and surface), soil, sediment, noise and ecology in order to monitor the performance and implementation of a project in compliance with Environmental quality standards and/or applicable Statutory norms.

The scope of work includes not limited to following:

1. To review the locations/stations of Ambient Air, Ambient Noise, drinking water, and Marine Water, Soil and Sediments monitoring within the impacted region in-and-around DPA establishment, in view of the developmental projects.
2. To assess the Ambient Air quality, quality at 6 stations at Kandla and 2 at Vadinar in terms of gases and particulate matter.
3. To assess the DG stack emissions (gases and particulate matter).
4. To assess Drinking water quality at twenty locations (18 at Kandla and 2 at Vadinar) in terms of Physical, Chemical and Biological parameters viz., Color, Odor, turbidity, conductivity, pH, Total Dissolved Solids, chlorides, Hardness, total iron, sulfate, NH₄, PO₄, and bacterial count on a monthly basis.
5. To assess the Marine water quality in terms of aquatic Flora and Fauna and Sediment quality in terms of benthic flora and fauna.
6. To assess Marine Water Quality and sediment in term of physical and chemical parameter.
7. To assess the trends of water quality in terms of Marine ecology by comparing the data collected over a specified time period.
8. Weekly sample collection and analysis of inlet & Outlet points of the Sewage Treatment Plant (STP) to check the water quality being discharged by DPA as per the CC&A.
9. Carrying out monthly Noise monitoring; twice a day at the representative stations for a period of 24 hours.
10. Meteorological parameters are very important from air pollution point of view; hence precise and continuous data collection is of utmost importance. Meteorological data on wind speed, wind direction, temperature, relative humidity, solar radiation and

rainfall shall be collected from one permanent station at DPA, Kandla and one permanent station at Vadinar.

11. To suggest mitigation measures, based on the findings of this study and also check compliance with Environmental quality standards, Green Port Initiatives, MIV 2030, and any applicable Statutory Compliance.
12. To recommend Environment Management Plans based on Monitoring programme and findings of the study.

CHAPTER 2: METHODOLOGY

2.1 Study Area

Under the study, the locations specified by Deendayal Port Authority for the areas of Kandla and Vadinar would be monitored. The details of the study area as follows:

a. Kandla

Deendayal Port (Erstwhile Kandla Port) is one of the twelve major ports in India and is located on the West Coast of India, in the Gulf of Kutch at 23°01'N and 70°01'E in Gujarat. The Major Port Authorities Act 2021 is the governing statute for Administration of Major Ports, under which, Deendayal Port Trust (DPT) has become Deendayal Port Authority (DPA). At Kandla, DPA has sixteen (16) cargo berths for handling various types of Dry Bulk Cargo viz, fertilizer, food grains, Coal, sulphur, etc.

- **Climatic conditions of Kandla**

Kandla has a semi-desert climate. Temperature varies from 25°C to 44°C during summer and 10°C to 25°C during winter. The average annual temperature is 24.8 °C. The average rainfall is 410 mm, most of which occurs during the monsoon from the months of June-to-September.

b. Vadinar


Vadinar is a small coastal town located in Devbhumi Dwarka district of the Gujarat state in India located at coordinates 22° 27' 16.20" N - 069° 40' 30.01". DPA had commissioned the Off Shore Oil Terminal (OOT) facilities at Vadinar in the year 1978, for which M/s. Indian Oil Corporation Limited (IOCL) provided Single Bouy Mooring (SBM) system, with a capacity of 54 MMTPA. The OOT of the DPA contributes in a large way to the total earnings of this port. Vadinar is now notable due to the presence of two refineries-one promoted by Reliance Industries and Essar Oil Ltd.

DPA also handled 43.30 MMT at Vadinar (which includes transhipment), the containerized cargo crossed 4.50 lakh TEU, grossing a total of 100 MMT overall. Major commodities handled by the Deendayal Port are Crude Oil, Petroleum product, Coal, Salt, Edible Oil, Fertilizer, etc.

- **Climatic conditions of Vadinar**

Vadinar has a hot semi-arid climate. The summer season lasts from March-to-May and is extremely hot, humid, but dry. The climatic conditions in Vadinar are quite similar to that recorded in its district head quarter i.e., Jamnagar. The annual mean temperature is 26.7 °C. Rainy season with extremely erratic monsoonal rainfall that averages around 630 millimetres. The winter season is from October-to-February remains hot during the day but has negligible rainfall, low humidity and cool nights.

The Kandla and Vadinar port have been depicted in the **Map 1** as follows:

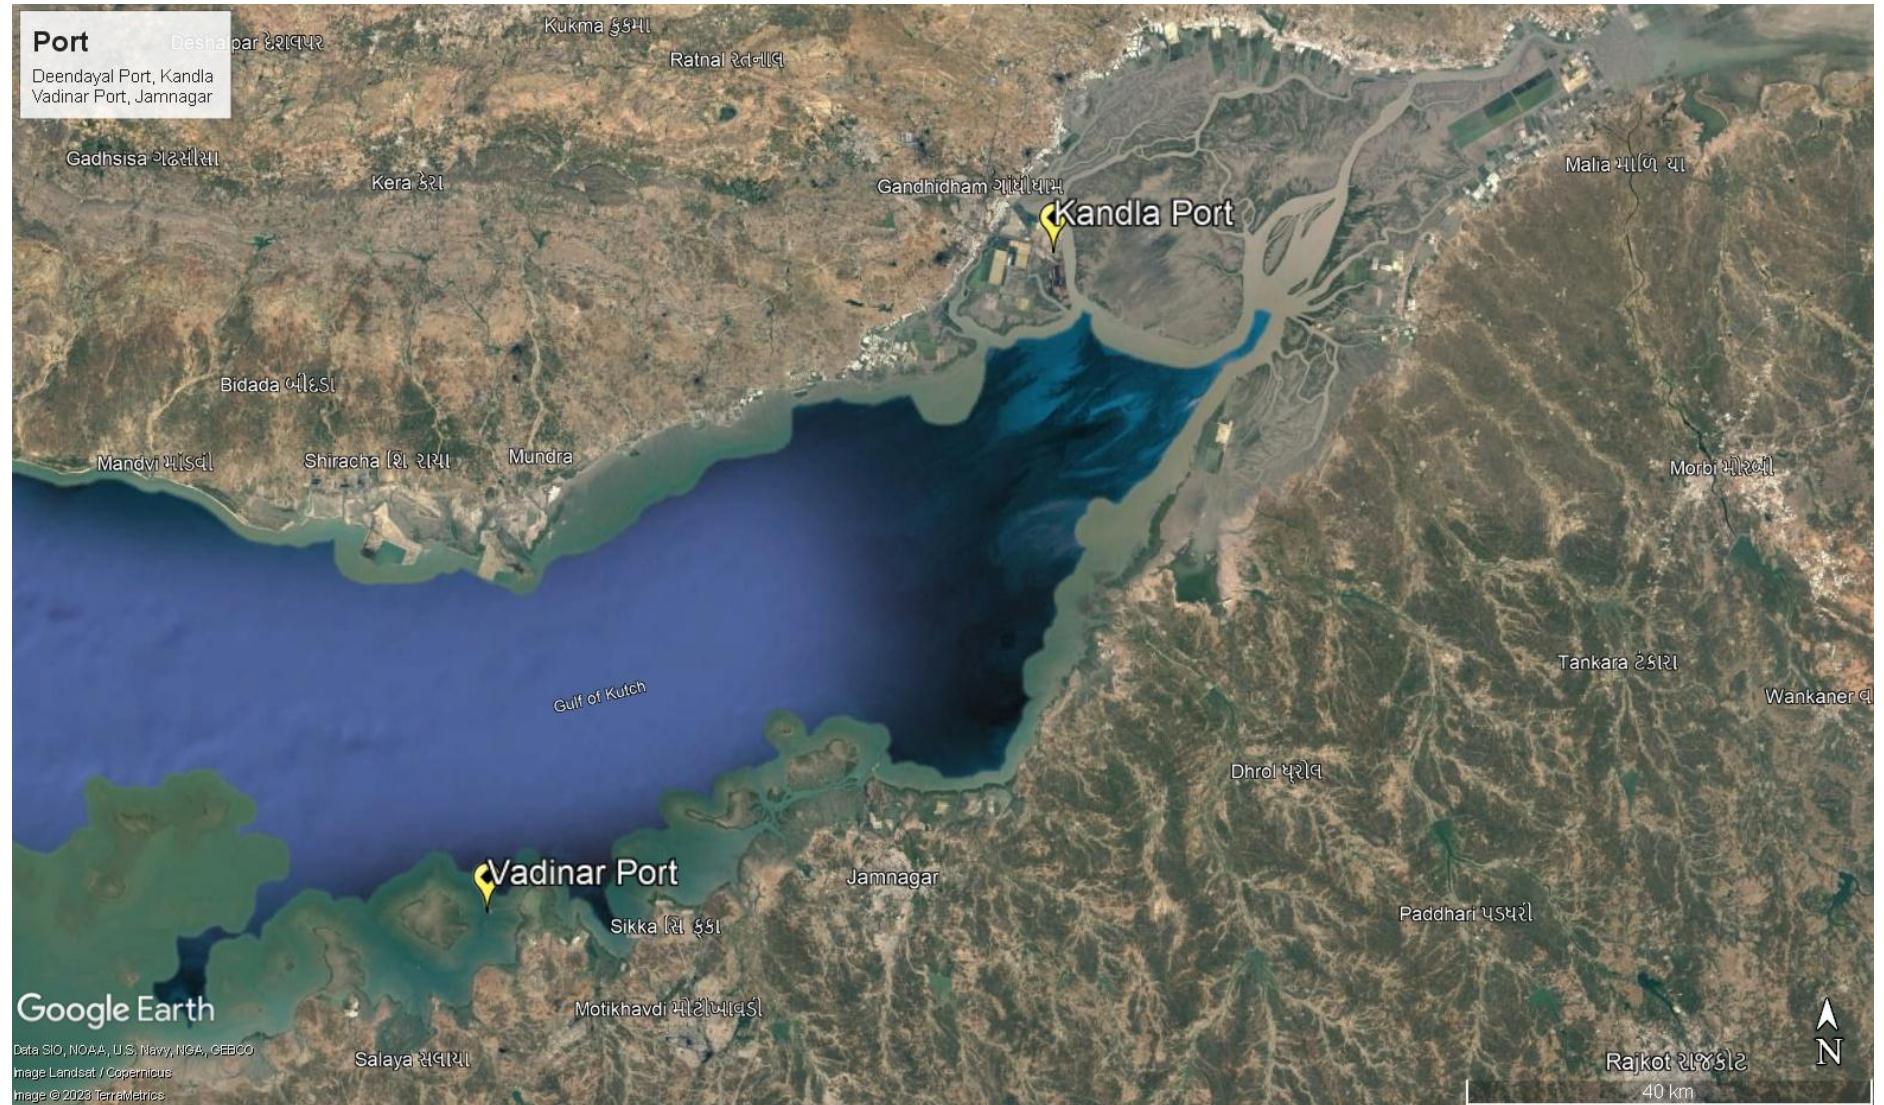

Map 1: Locations of Kandla and Vadinar Port



Map 2: Locations of Kandla Port



Map 3: Locations of Vadinar Port

2.2 Environmental Monitoring at Kandla and Vadinar

Regular monitoring of environmental parameters is of immense importance to assess the status of environment during project operation. With the knowledge of baseline conditions, the monitoring programme will serve as an indicator for identifying any deterioration in environmental conditions, thereby assist in recommending suitable mitigatory steps in time to safeguard the environment. Monitoring is as important as that of control of pollution since the efficiency of control measures can only be determined by a well-defined monitoring program. Environmental Monitoring is vital for monitoring the environmental status of the port for sustainable development. The list of main elements for which Environmental monitoring is to be carried out have been mentioned below:

- Meteorology
- Ambient Air
- DG Stack
- Noise
- Soil
- Drinking Water
- Sewage Treatment Plant
- Marine (Surface) water
- Marine Sediments
- Marine Ecology

GEMI has been entrusted by DPA to carry out the monitoring of the various aforementioned environmental aspects at the port, so as to verify effectiveness of prevailing Environment Management plan, if it confirms to the statutory and/or legal compliance; and identify any unexpected changes. Standard methods and procedures have been strictly adhered to in the course of this study. QA/QC procedures were strictly followed which covers all aspects of the study, and includes sample collection, handling, laboratory analyses, data coding, statistical analyses, interpretation and communication of results. The analysis was carried out in GEMI's NABL/MoEF accredited/recognized laboratory.

Methodology adopted for the study

Methodology is a strictly defined combination of practices, methods and processes to plan, develop and control a project along the continuous process of its implementation and successful completion. The aim of the project management methodology is to allow the control of whole process of management through effective decision-making and problem solving. The methodology adopted for the present study is shown in **Figure 1** as given below:

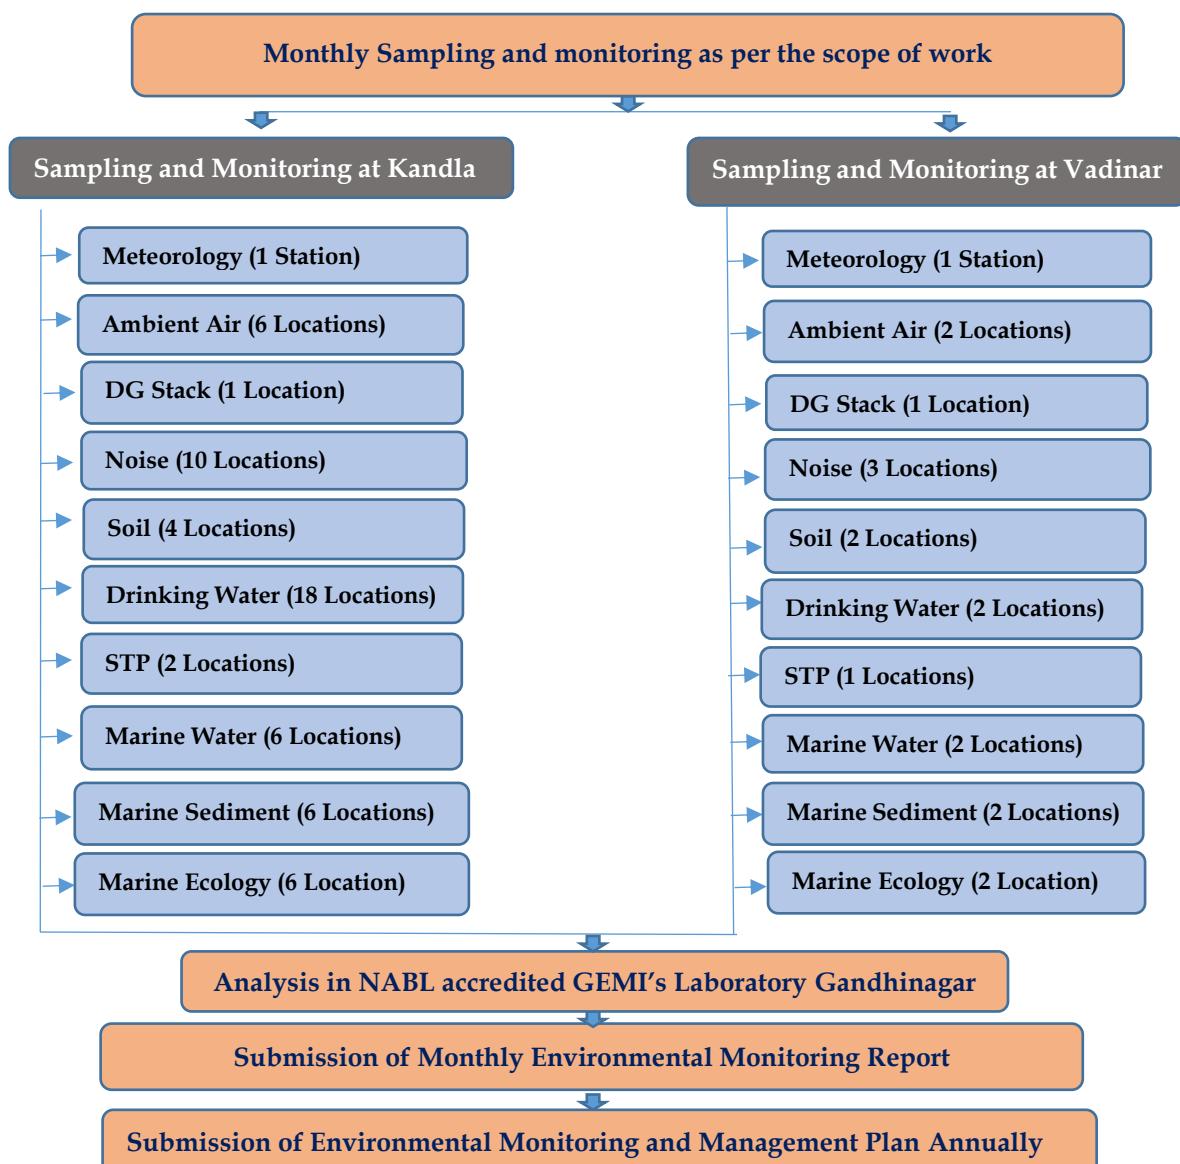


Figure 1: Methodology flow chart

The details of various sectors of Environment monitoring are described in subsequent chapters.



CHAPTER 3: METEOROLOGY MONITORING

3.1 Meteorology Monitoring

Meteorological conditions play a crucial role in dispersion of air pollutants as well as in environmental pollution studies particularly in pollutant transport irrespective of their entry into the environment. The wind speed and direction play a major role in dispersion of environment pollutants. In order to determine the prevailing micro-meteorological conditions at the project site an Automatic Weather Monitoring Stations (AWS) of Envirotech make (Model: WM280) were installed at both the sites of Kandla and Vadinar at 10 m above the ground. The details of the AWS installed have been mentioned in **Table 1** as follows:

Table 1: Details of Automatic Weather Station

Sr. No.	Site	Location Code	Location Name	Latitude Longitude
1.	Kandla	AWS-1	Environment Laboratory (DPA)	23.00996N 70.22175E
2.	Vadinar	AWS-2	Canteen Area	22.39994N 69.716608E

Methodology

During the study, a continuous automatic weather monitoring station was installed at both the sites to record climatological parameters such as Wind speed, Wind Direction, Relative Humidity, Solar Radiation, Rainfall and Temperature to establish general meteorological regime of the study area. The methodology adopted for monitoring meteorological data shall be as per the standard norms laid down by Bureau of Indian Standards (BIS) and the India Meteorological Department (IMD). The details of Automatic Weather Monitoring Station have been mentioned in **Table 2**.

Table 2: Automatic Weather Monitoring Station details

Sr. No.	Details of Meteorological Data	Unit of Measurement	Instrument	Frequency
1.	Wind Direction	degree		
2.	Wind Speed	Km/hr		
3.	Rainfall	mm/hr		
4.	Relative Humidity	% RH		
5.	Temperature	°C		
6.	Solar Radiation	W/m ²		

The Meteorological parameters were recorded at an interval of 1 hour in a day and the average value for all the Meteorological parameters were summarized for the sampling period of at both the observatory site.



Figure 2: Photographs of Automatic Weather Monitoring Station at Kandla and Vadinar

3.2 Results and discussion

The summary of hourly climatological observations recorded at Kandla and Vadinar during the monitoring period, with respect to significant parameters has been mentioned in **Table 3** as follows:

Table 3: Meteorological data for Kandla and Vadinar

Details of Micro-meteorological data at Kandla Observatory													
Monitoring Period	Wind Speed (Km/h)			Temperature (°C)			Relative humidity (%)			Solar Radiation (W/m ²)	Wind Direction (°)	Rainfall (mm)	
	Stat.	Mean	Max.	Min	Mean	Max	Min	Mean	Max	Min			
September-October 2025		2.59	50	0.6	30.24	39.2	24.5	67.09	89.4	31.5	75.35	North	0.08
Details of Micro-meteorological data at Vadinar Observatory													
Monitoring Period	Wind Speed (Km/h)			Temperature (°C)			Relative humidity (%)			Solar Radiation (W/m ²)	Wind Direction (°)	Rainfall (mm)	
	Stat.	Mean	Max.	Min	Mean	Max	Min	Mean	Max.	Min			
September-October 2025		3.28	52	0.6	29.53	38	23.5	68.85	85.6	52.1	70.32	NNW	0.05

3.3 Data Interpretation and Conclusion


- **Temperature**
 - a. **Kandla:** The ambient temperature for the monitoring period varies between the range of 24.5- 39.2°C for Kandla, with average temperature of 30.24°C.
 - b. **Vadinar:** The ambient temperature for the monitoring period varies between the range of 23.5-38°C for Vadinar, with average temperature of 29.53°C.
- **Relative Humidity**
 - a. **Kandla:** The Relative Humidity recorded between the range of 31.5-89.4, with average Humidity of 67.09%.
 - b. **Vadinar:** During the study period, the Relative Humidity varies between 52.1- 85.6%, with average Humidity of 68.85%.
- **Rainfall**
 - a. **Kandla:** 0.08 mm/hr rainfall was observed at Kandla.
 - b. **Vadinar:** 0.05 mm/hr rainfall was observed at Vadinar.
- **Wind Speed**


Wind speed and Direction play a significant role in transporting the pollutants and thus decides the air quality.

 - a. **Kandla:** Wind speed recorded ranges between 0.6-50 Km/hr.
 - b. **Vadinar:** During the monitoring period, the Wind speed recorded ranges between 0.6-52 Km/hr.
- **Solar Radiation:**
 - a. **Kandla:** The average Solar Radiation for the monitoring period was recorded as 75.35 W/m².
 - b. **Vadinar:** The average Solar Radiation was recorded as 70.32 W/m².
- **Wind rose diagram -**

The wind-rose diagram for the monitoring period has been drawn on the basis of hourly wind speed and direction data.

This Wind Rose Diagram reveals that at Kandla and Vadinar, during the monitoring period, the prevailing winds predominantly blow from the North at Kandla. At Vadinar, the winds were observed to blow from North North West Direction.

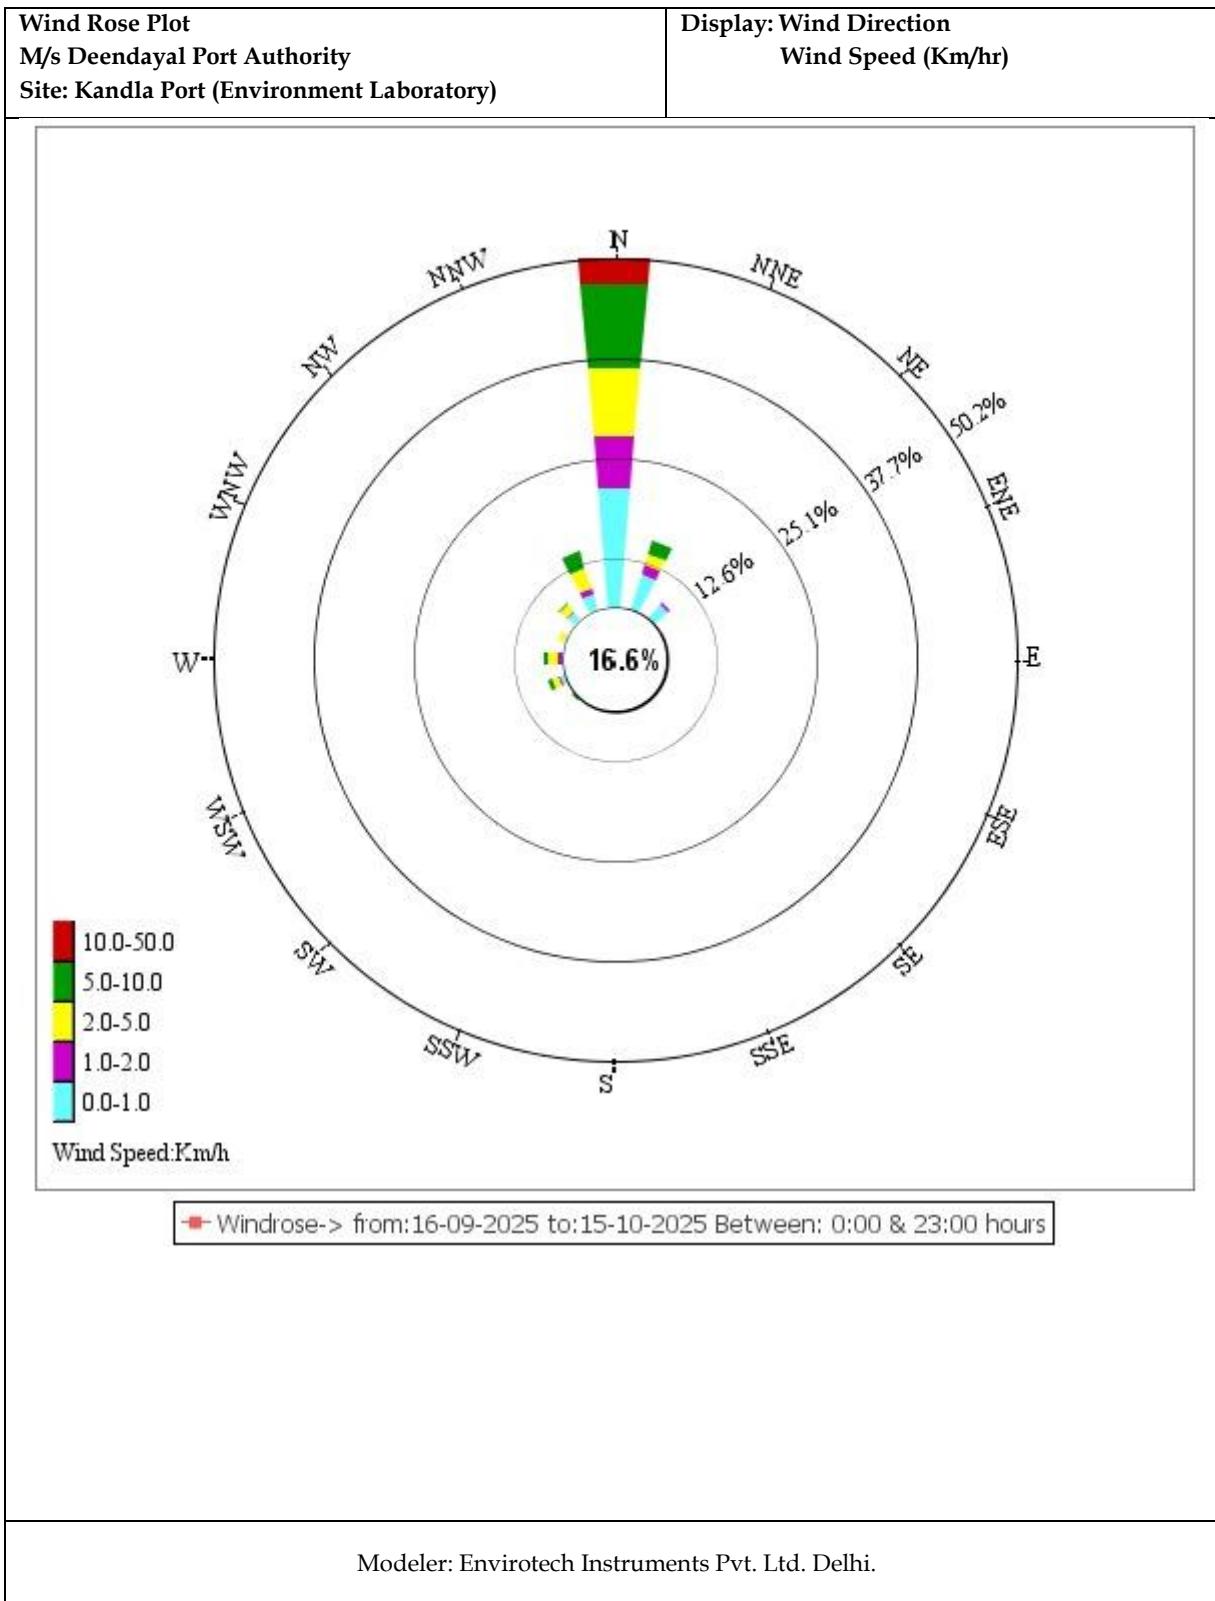

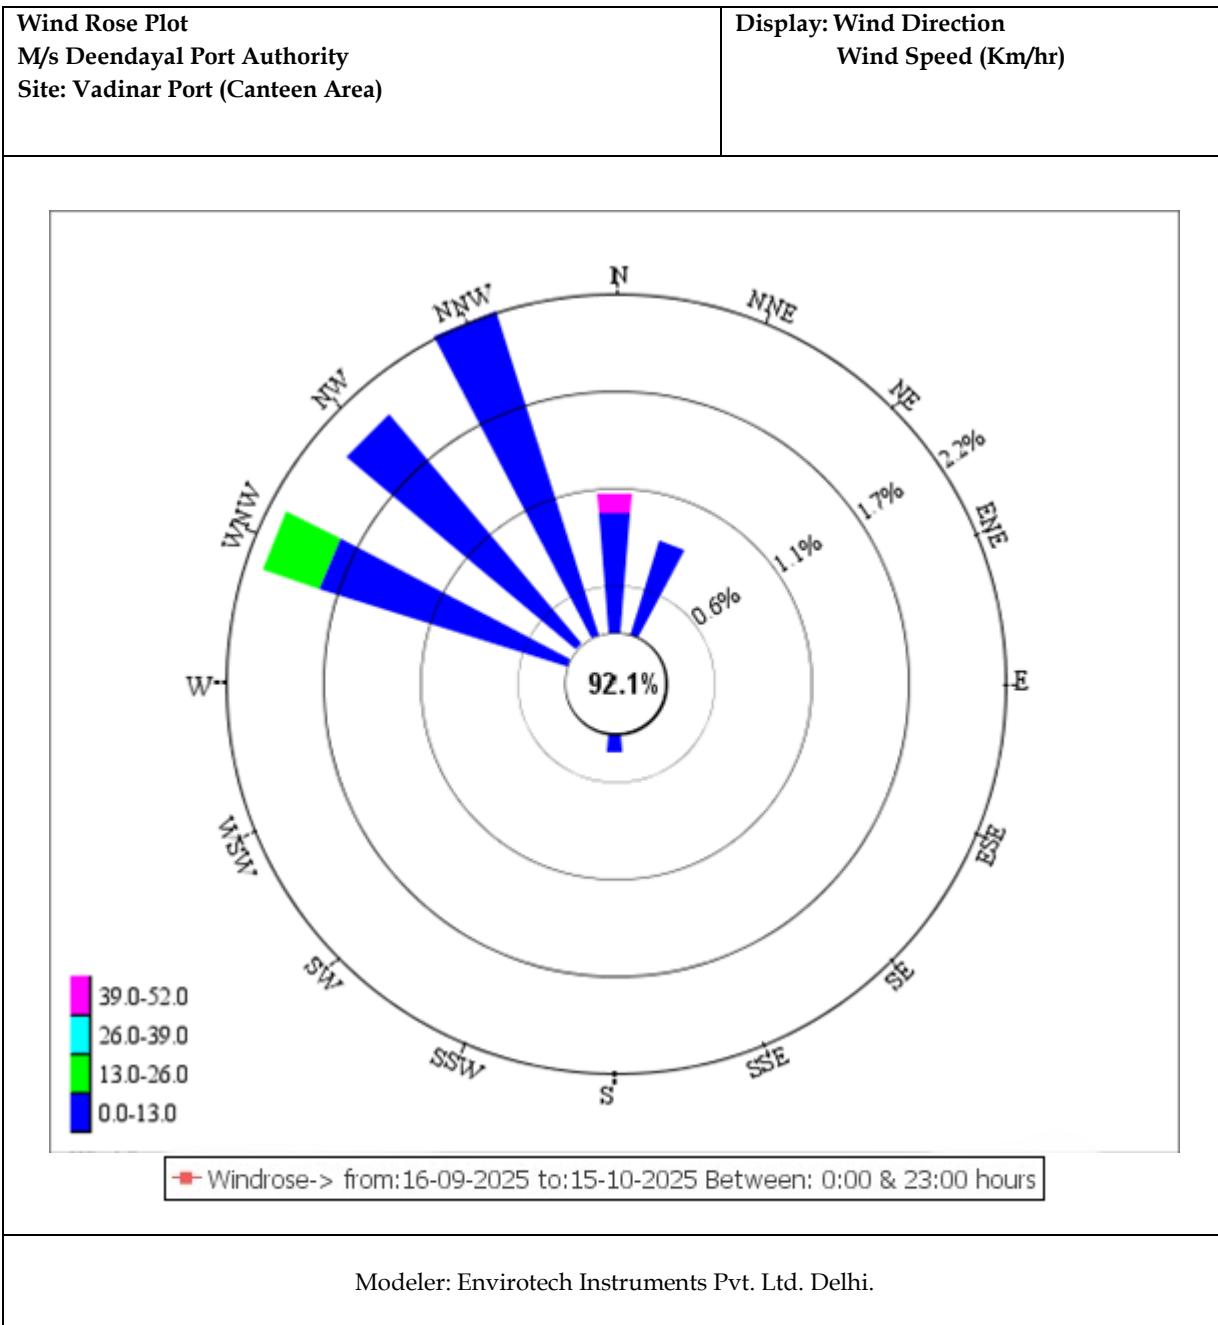

CHAPTER 4: AMBIENT AIR QUALITY MONITORING

4.1 Ambient Air Quality

It is necessary to monitor the ambient air quality of the study area, in order to determine the impact of the shipping activities and port operations on the ambient air quality. The prime objective of ambient air quality monitoring is to assess the present air quality and its conformity to National Ambient Air Quality Standards i.e. NAAQS, 2009. Ambient air quality has been monitored from 16th September to 15th October 2025.

Methodology

The study area represents the area occupied by DPA and its associated Port area. The sources of air pollution in the region are mainly vehicular traffic, fuel burning, loading & unloading of dry cargo, fugitive emissions from storage area and dust arising from unpaved village roads. Considering the below factors, under the study, as per the scope specified by DPA eight locations wherein, 6 stations at Kandla and 2 at Vadinar have been finalized within the study area

- Meteorological conditions;
- Topography of the study area;
- Direction of wind;
- Representation of the region for establishing current air quality status
- Representation with respect to likely impact areas.

The description of various air quality stations monitored at Kandla and Vadinar have been specified in **Table 4**.

Table 4: Details of Ambient Air monitoring locations

Sr. No.	Location Code	Location Name	Latitude	Longitude	Significance
1.	Kandla	A-1	Oil Jetty No. 1	23.029361N	70.22003E
2.		A-2	Oil Jetty No. 7	23.043538N	70.218617E
3.		A-3	Bansal Canteen	23.027197N	70.195451E
4.		A-4	Sewa Sadan-3	23.009945N	70.221745 E
5.		A-5	Coal Storage Area	23.000190N	70.219757E
6.		A-6	Gopalpuri Hospital	23.081506N	70.135258E
7.	Vadinar	A-7	Admin Building	22.441806N	69.677056E
8.		A-8	Vadinar Colony	22.401939N	69.716306E

The two ambient air monitoring locations have been changed: Location A-3, previously at Kandla Port Colony, has now been shifted to Bansal Canteen, and Location A-4, earlier at Marine Bhavan, is now relocated to Sew Sadan-3. The monitoring locations at Kandla and Vadinar have been depicted in map in **Map 4 and 5** respectively.

Ambient Air monitoring photos

Kandla



Vadinar

A-7: Admin Building




A-8: Vadinar Colony





Map 4: Locations for Ambient Air Monitoring at Kandla

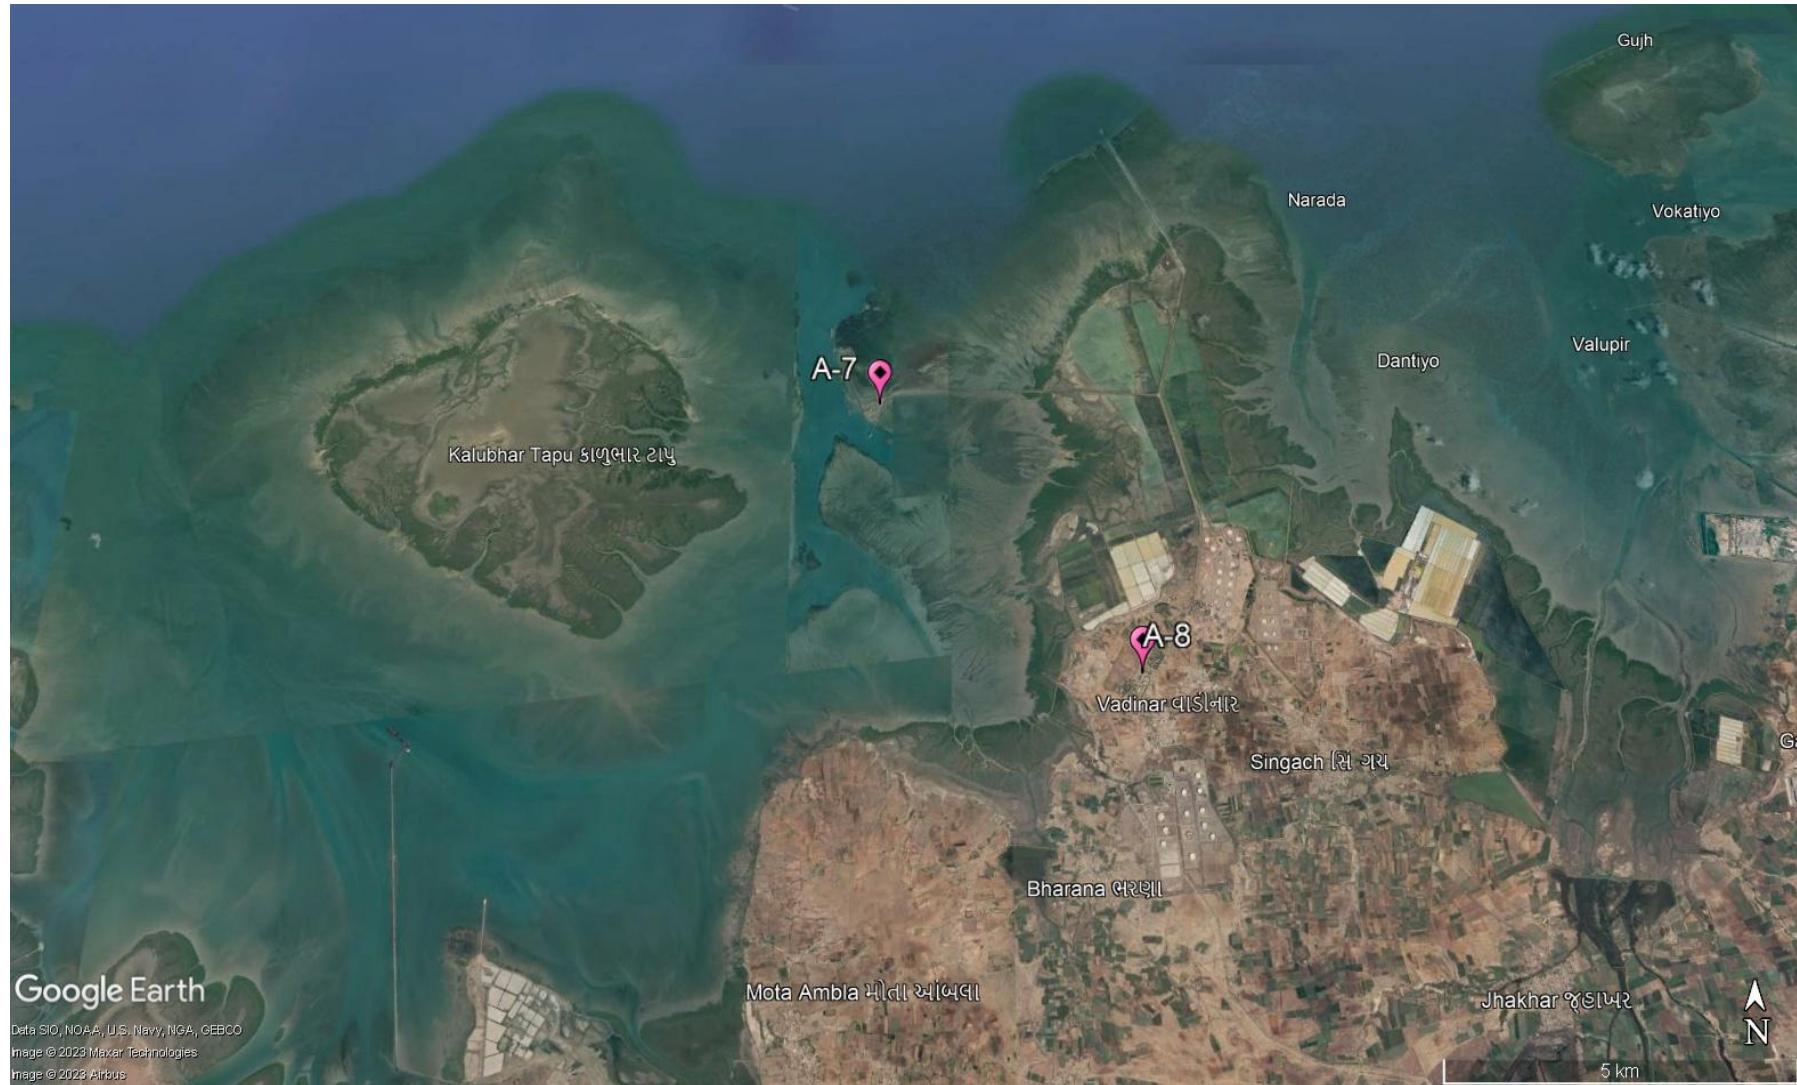

Map 5: Locations for Ambient Air Monitoring at Vadinar

Frequency

The sampling for Particulate matter i.e. PM₁₀ and PM_{2.5} and the gaseous components like SO_x, NO_x, CO as well as the Total VOCs were monitored twice in a week for a period of 24 hours a day. Whereas, the sampling for the components of PAH, Benzene and non-Methane VOCs was conducted on monthly basis.

Sampling and Analysis

The Sampling of the Ambient Air Quality parameters and analysis is conducted as per the CPCB guidelines of National Ambient Air Quality Monitoring. The sampling was performed at a height of 3.5 m (approximately) from the ground level. For the sampling of PM₁₀, calibrated 'Respirable Dust Samplers' were used, where Whatman GF/A microfiber filter paper of size 8" x 10" were utilized, where the Gaseous attachment of the make Envirotech instrument was attached with Respirable Dust Sampler for the measurement of SO_x and NO_x. The Fine Particulate Sampler for collection of PM_{2.5} was utilized for the particulate matter of size <2.5 microns. A known volume of ambient air is passed through the cyclone to the initially pre-processed filter paper. The centrifugal force in cyclone acts on particulate matter to separate them into two parts and collected as following:

- Particles <10 μ size (Respirable): GF/A Filter Paper
- Particles <2.5 μ size (Respirable): Polytetrafluoroethylene (PTFE)

Sampling and analysis of ambient SO₂ was performed by adopting the 'Improved West and Gaeke Method'. The ambient air, drawn through the draft created by the RDS, is passed through an impinger, containing a known volume of absorbing solution of Sodium tetrachloromercurate, at a pre-determined measured flow rate of 1 liter/minute (L/min). Similarly, NO_x was performed by adopting the 'Jacob Hochheister Modified' (Na arsenite) method. The impinger contains known volume of absorbing solution of Sodium Arsenite and Sodium Hydroxide.

Data has been compiled for PM₁₀, PM_{2.5}, SO_x and NO_x samples of 24-hour carried out twice a week. In case of CO, one hourly sample were taken on selected monitoring days using the sensor-based CO Meter. For the parameters Benzene, Methane & Non-methane and Volatile Organic Carbons (VOCs), the Low Volume Sampler is used, where the charcoal tubes are used as sampling media. The sampling in the Low Volume Sampler (LVS) is carried out as per IS 5182 (Part 11): 2006 RA: 2017, where the ambient air flow rate is maintained at 200 cc/min, the volume of air that passes through the LVS during two hours monitoring is approx. 24 L.

The sampling of PAHs is carried out as per IS: 5182 (Part 12): 2004. Where, the EPM 2000 Filter papers are utilized in the Respirable Dust Sampler (RDS). For the parameters, Benzene, PAH & Non-methane VOC's, monthly monitoring is carried out. The details of the parameters with their frequency monitored are mentioned in **Table 5**:

Table 5: Parameters for Ambient Air Quality Monitoring

Sr. No.	Parameters	Units	Reference method	Instrument	Frequency
1.	PM ₁₀	µg/m ³	IS 5182 (Part 23): 2006	Respirable Dust Sampler (RDS) conforming to IS:5182 (Part-23): 2006	Twice in a week
2.	PM _{2.5}	µg/m ³	IS:5182 (Part:24):2019	Fine Particulate Sampler (FPS) conforming to IS:5182 (Part-24): 2019	
3.	Sulphur Dioxide (SO _x)	µg/m ³	IS 5182 (Part:2): 2001	Gaseous Attachment conforming to IS:5182 Part-2	
4.	Oxides of Nitrogen (NO _x)	µg/m ³	IS:5182 (Part-6): 2006	Gaseous Attachment conforming to IS:5182 Part-6	
5.	Carbon Monoxide (CO)	mg/m ³	GEMI/SOP/AAQM/11 ; Issue no 01, Date 17.01.2019: 2019	Sensor based Instrument	
6.	VOC	µg/m ³	IS 5182 (Part 17): 2004	Low Flow Air Sampler	
8.	PAH	µg/m ³	IS: 5182 (Part 12): 2004	Respirable Dust Sampler (RDS) conforming to IS:5182 (Part-12): 2004	Monthly
7.	Benzene	µg/m ³	IS 5182 (Part 11): 2006 RA: 2017	Low Flow Air Sampler	
9.	Non-methane VOC	µg/m ³	IS 5182 (Part 11): 2006	Low Volume Sampler	

4.2 Result and Discussion

The summarized results of ambient air quality monitoring for the study period are presented in **Table-6 to 9** along with the graphical representation from **Graph 1 to Graph 6**. Various parameters monitored during the study have been presented by their maximum, minimum, average and Standard deviation.

Table 6: Summarized results of PM₁₀, PM_{2.5}, SO₂, NO_x, VOC and CO for Ambient Air quality monitoring

Station Code & Name	Unit of Average Concentration	Average Pollutant Concentration					
		PM ₁₀ (µg/m ³)	PM _{2.5} (µg/m ³)	SO ₂ (µg/m ³)	NO _x (µg/m ³)	VOC (µg/m ³)	CO (mg/m ³)
	Duration	(24 hr)				(2 hr)	(1 hr)
A-1: Oil Jetty No.1,	NAAQS by CPCB Monitoring days	100	60	80	80	-	2
	16-09-2025	217.38	17.01	7.21	42.31	0.14	0.81
	18-09-2025	105.45	19.25	6.81	50.21	0.09	0.81
	22-09-2025	301.24	53.21	7.45	60.25	0.14	0.76
	24-09-2025	126.13	20.31	6.23	23.65	0.22	0.79


Station Code & Name	Unit of Average Concentration	Average Pollutant Concentration					
		PM ₁₀ (µg/m ³)	PM _{2.5} (µg/m ³)	SO ₂ (µg/m ³)	NO _x (µg/m ³)	VOC (µg/m ³)	CO (mg/m ³)
	Duration	(24 hr)			(2 hr)	(1 hr)	
	NAAQS by CPCB Monitoring days	100	60	80	80	-	2
Kandla	29-09-2025	200.15	15.24	7.11	54.62	0.12	0.80
	06-10-2025	223.42	33.20	7.10	32.36	0.19	0.80
	08-10-2025	250.13	27.51	6.54	29.51	0.15	0.81
	13-10-2025	245.16	40.26	8.11	42.13	0.23	0.78
	Minimum	105.45	15.24	6.23	23.65	0.09	0.76
	Maximum	301.24	53.21	8.11	60.25	0.23	0.81
	Average	208.63	28.25	7.07	41.88	0.16	0.80
	Std. Deviation	64.87	13.27	0.57	12.79	0.05	0.02
	16-09-2025	101.32	20.36	<5	16.43	0.14	0.82
	18-09-2025	164.53	25.64	6.23	15.42	0.18	0.81
A-2: Oil Jetty No.7, Kandla	22-09-2025	142.24	32.61	<5	14.66	0.19	0.79
	24-09-2025	152.43	42.15	<5	20.31	0.15	0.77
	29-09-2025	202.13	29.35	7.23	16.25	0.1	0.79
	06-10-2025	212.34	35.62	<5	10.23	0.07	0.82
	08-10-2025	196.22	31.25	<5	<6	0.13	0.80
	13-10-2025	200.13	29.46	12.23	<6	0.21	0.79
	Minimum	101.32	20.36	6.23	10.23	0.07	0.77
	Maximum	212.34	42.15	12.23	20.31	0.21	0.82
	Average	171.42	30.81	8.56	15.55	0.15	0.80
	Std. Deviation	38.23	6.49	3.21	3.26	0.05	0.02
A-3: Bansal Canteen, Kandla	16-09-2025	120.32	31.25	10.24	9.24	0.2	0.78
	18-09-2025	132.42	23.26	9.21	10.26	0.21	0.80
	22-09-2025	164.10	31.54	10.25	<6	0.09	0.81
	24-09-2025	184.25	28.65	9.43	12.45	0.12	0.81
	29-09-2025	232.23	46.21	<5	15.42	0.16	0.80
	06-10-2025	210.36	29.54	8.56	18.21	0.13	0.75
	08-10-2025	203.25	30.42	7.45	16.43	0.15	0.69
	13-10-2025	195.43	39.52	11.44	<6	0.09	0.68
	Minimum	120.32	23.26	7.45	9.24	0.09	0.68
	Maximum	232.23	46.21	11.44	18.21	0.21	0.81
A-4: Sewa Sadan - 3, Kandla	Average	180.30	32.55	9.51	13.67	0.14	0.77
	Std. Deviation	38.77	7.10	1.29	3.58	0.05	0.05
	16-09-2025	214.29	19.95	<5	<6	0.17	0.81
	18-09-2025	216.58	19.92	<5	<6	0.2	0.80
	22-09-2025	168.93	28.55	<5	<6	0.19	0.83
	24-09-2025	308.67	37.66	7.75	20.13	0.15	0.78
	29-09-2025	317.46	49.09	7.45	<6	0.12	0.78
	06-10-2025	315.46	50.64	<5	<6	0.06	0.79
	08-10-2025	303.12	46.13	7.21	<6	0.09	0.79
	13-10-2025	330.21	52.64	<5	13.02	0.13	0.77
	Minimum	168.93	19.92	7.21	13.02	0.06	0.77
	Maximum	330.21	52.64	7.75	20.13	0.20	0.83

Station Code & Name	Unit of Average Concentration	Average Pollutant Concentration					
		PM ₁₀ (µg/m ³)	PM _{2.5} (µg/m ³)	SO ₂ (µg/m ³)	NO _x (µg/m ³)	VOC (µg/m ³)	CO (mg/m ³)
	Duration	(24 hr)			(2 hr)	(1 hr)	
	NAAQS by CPCB						
	Monitoring days	100	60	80	80	-	2
A-5: Coal Storage Area, Kandla	Average	271.84	38.07	7.47	16.58	0.14	0.79
	Std. Deviation	61.74	13.66	0.27	5.03	0.05	0.02
	16-09-2025	211.36	43.51	12.34	12.53	0.19	0.81
	18-09-2025	190.25	25.36	15.32	10.26	0.08	0.65
	22-09-2025	156.25	34.26	<5	24.65	0.21	0.72
	24-09-2025	256.33	22.25	22.41	28.61	0.08	0.71
	29-09-2025	312.21	42.35	<5	32.60	0.17	0.78
	06-10-2025	346.25	55.46	21.34	42.17	0.16	0.81
	08-10-2025	254.66	42.33	<5	31.26	0.19	0.81
	13-10-2025	244.12	52.65	11.23	20.46	0.05	0.79
	Minimum	156.25	22.25	11.23	10.26	0.05	0.65
	Maximum	346.25	55.46	22.41	42.17	0.21	0.81
	Average	246.43	39.77	16.53	25.32	0.14	0.76
	Std. Deviation	62.08	11.86	5.12	10.67	0.06	0.06
A-6: Gopalpuri Hospital, Kandla	16-09-2025	113.09	35.19	<5	18.12	0.1	0.61
	18-09-2025	103.79	24.79	<5	16.43	0.12	0.61
	22-09-2025	92.03	18.81	<5	25.63	0.15	0.60
	24-09-2025	191.84	45.74	7.88	32.65	0.18	0.60
	29-09-2025	234.86	52.31	9.07	29.51	0.06	0.60
	06-10-2025	200.12	23.10	7.92	22.36	0.12	0.62
	08-10-2025	222.31	42.56	8.21	31.44	0.1	0.61
	13-10-2025	246.14	51.44	9.01	35.61	0.13	0.59
	Minimum	92.03	18.81	7.88	16.43	0.06	0.59
	Maximum	246.14	52.31	9.07	35.61	0.18	0.62
	Average	175.52	36.74	8.42	26.47	0.12	0.61
	Std. Deviation	62.77	13.23	0.58	7.01	0.04	0.01
A-7: Admin Building, Vadinar	16-09-2025	137.98	6.52	<5	57.59	0.06	0.59
	18-09-2025	119.81	11.21	<5	32.69	0.17	0.63
	22-09-2025	106.48	15.24	<5	56.29	0.15	0.69
	24-09-2025	110.73	19.46	5.03	32.47	0.14	0.65
	29-09-2025	108.68	15.48	8.12	26.21	0.22	0.69
	06-10-2025	157.05	19.02	7.09	32.47	0.15	0.69
	08-10-2025	140.92	30.76	7.56	62.57	0.11	0.59
	13-10-2025	120.42	13.52	6.32	33.12	0.12	0.64
	Minimum	106.48	6.52	5.03	26.21	0.06	0.59
	Maximum	157.05	30.76	8.12	62.57	0.22	0.69
	Average	125.26	16.40	6.82	41.68	0.14	0.65
	Std. Deviation	18.16	7.15	1.20	14.47	0.05	0.04
A-8: Vadinar Colony,	16-09-2025	170.45	8.59	<5	35.86	0.23	0.67
	18-09-2025	95.73	17.06	<5	21.05	0.21	0.69
	22-09-2025	84.44	17.66	<5	28.68	0.12	0.65
	24-09-2025	71.15	17.86	<5	37.71	0.2	0.61


Station Code & Name	Unit of Average Concentration	Average Pollutant Concentration					
		PM ₁₀ (µg/m ³)	PM _{2.5} (µg/m ³)	SO ₂ (µg/m ³)	NO _x (µg/m ³)	VOC (µg/m ³)	CO (mg/m ³)
	Duration	(24 hr)			(2 hr)	(1 hr)	
	NAAQS by CPCB Monitoring days	100	60	80	80	-	2
Vadinar	29-09-2025	55.70	14.14	7.29	45.32	0.16	0.71
	06-10-2025	78.47	14.93	7.00	39.56	0.15	0.71
	08-10-2025	109.34	29.16	7.30	43.72	0.14	0.57
	13-10-2025	97.45	15.42	7.12	22.25	0.18	0.72
	Minimum	55.70	8.59	7.00	21.05	0.12	0.57
	Maximum	170.45	29.16	7.30	45.32	0.23	0.72
	Average	95.34	16.85	7.18	34.27	0.17	0.67
	Std. Deviation	34.65	5.79	0.14	9.29	0.04	0.05

Graphs 1-6 shows spatial trend of ambient air parameter at all the eight-monitoring location (six at Kandla and 2 at Vadinar)

PM₁₀

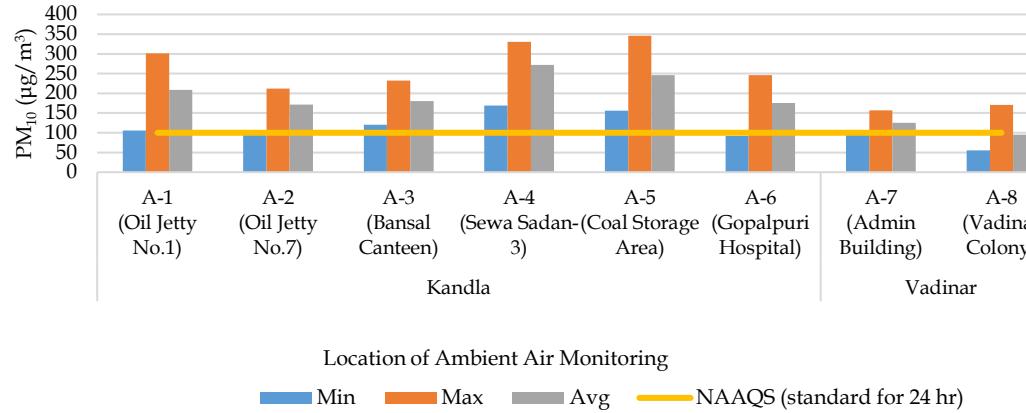


PM_{2.5}

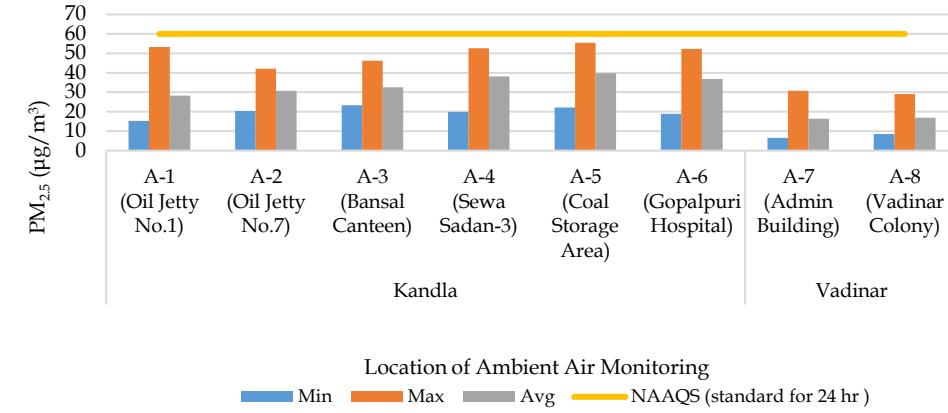


Graph 1: Spatial trend in Ambient PM₁₀ Concentration

SOx

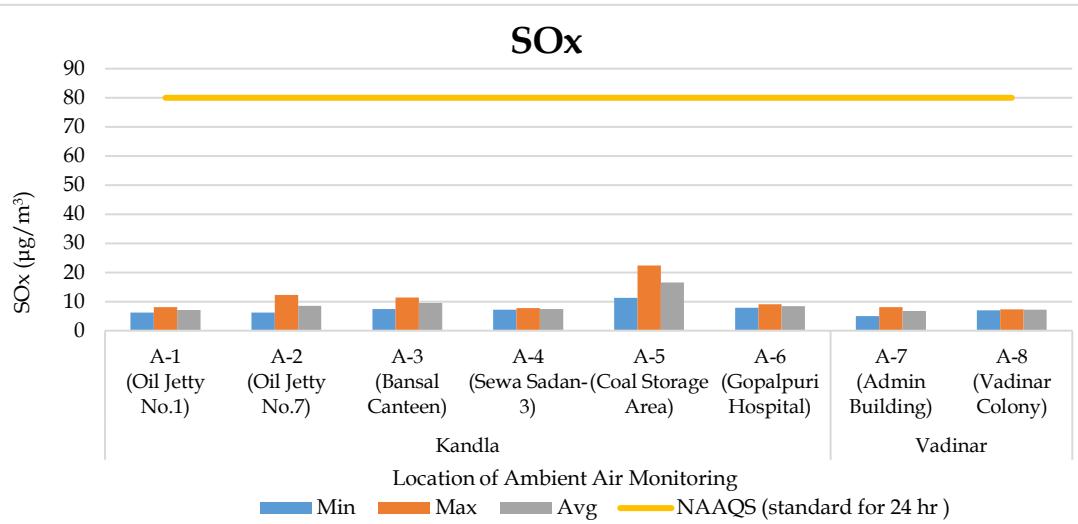


Graph 3: Spatial Trend in Ambient SOx Concentration


NOx

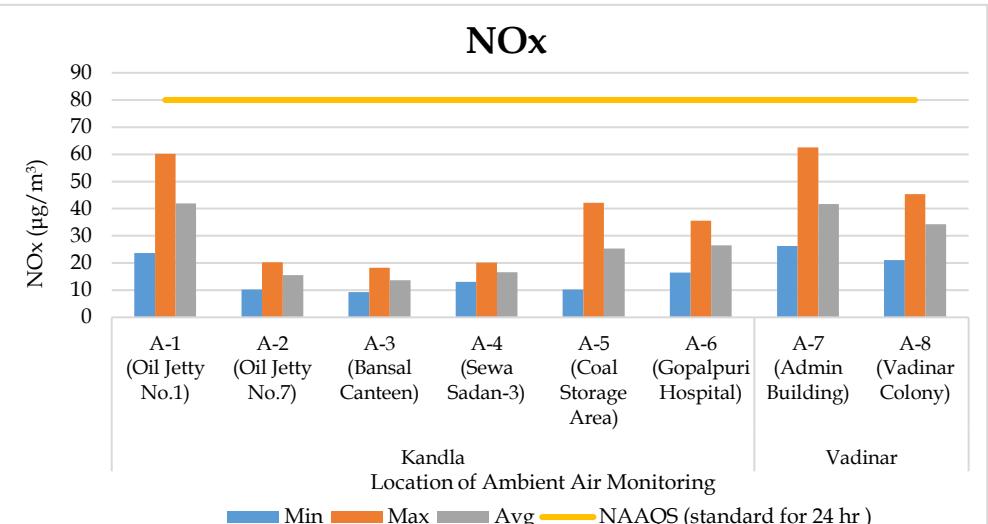

Graph 4: Spatial trend in Ambient NOx Concentration

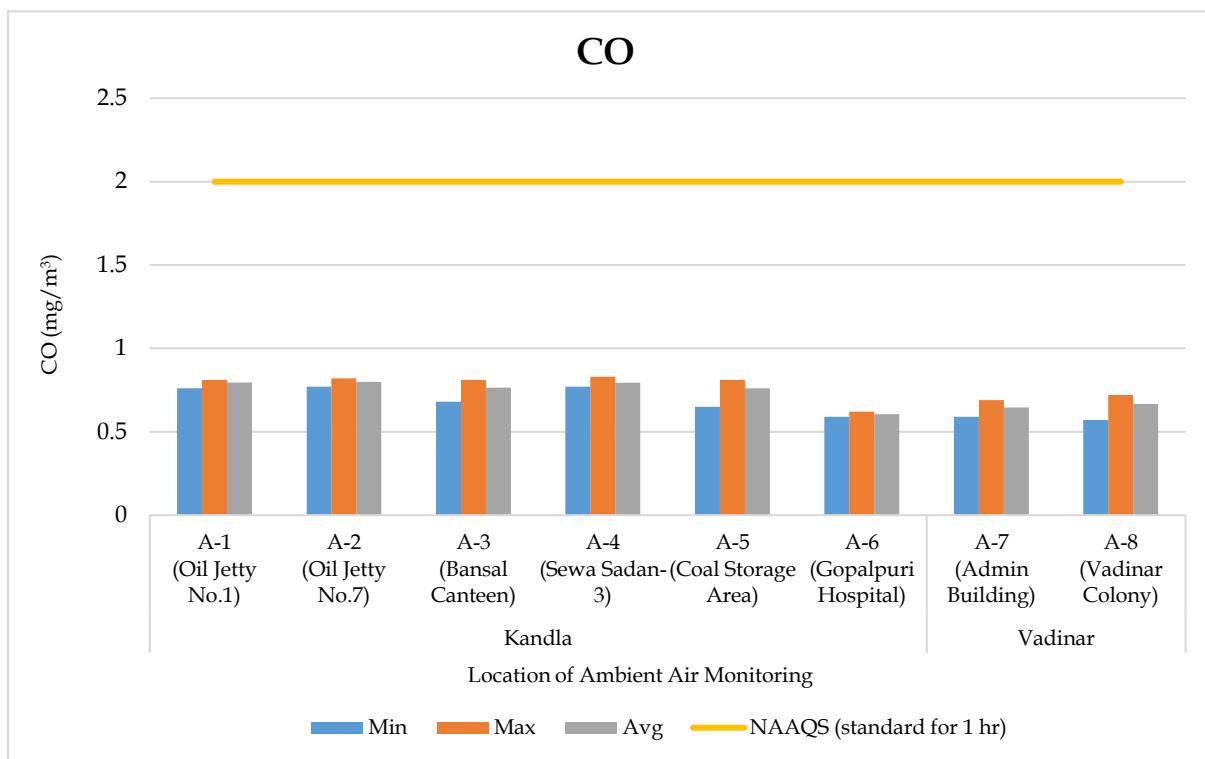

Graph 5: Spatial trend in Ambient CO Concentration

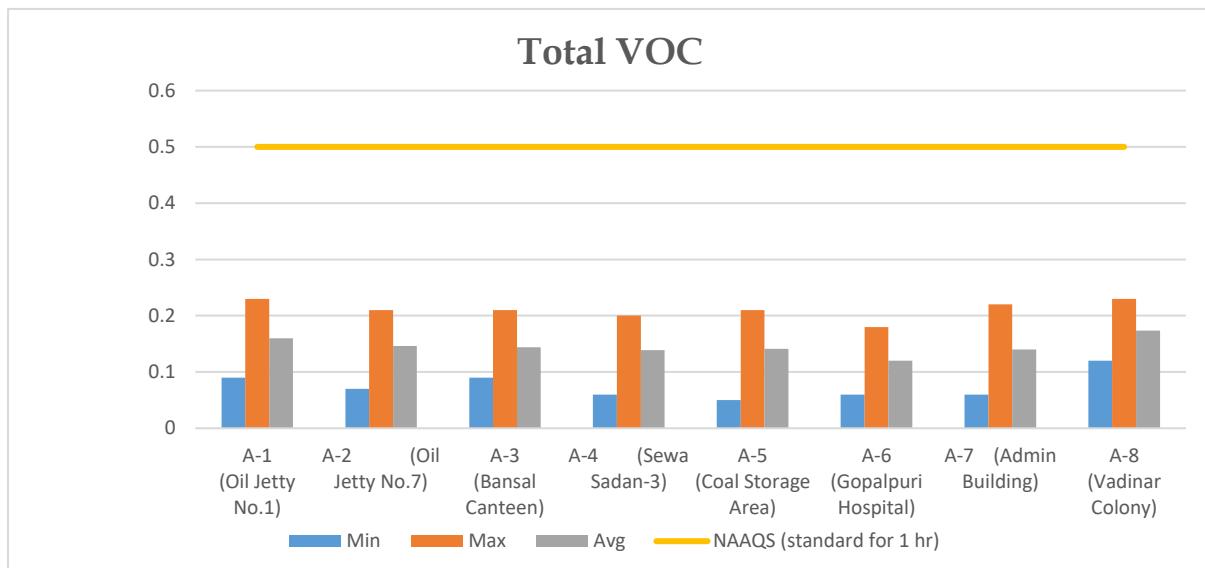

Graph 6: Spatial trend in Ambient Total VOCs

Table 7: Summarized results of Benzene for Ambient Air quality monitoring

Sr. No	Benzene ($\mu\text{g}/\text{m}^3$)						Vadinar		NAAQS standards (24 hr)
	A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-8	
1	0	0	0	0	0	0	0	0	5 $\mu\text{g}/\text{m}^3$

Table 8: Summarized results of Polycyclic Aromatic Hydrocarbons

Sr. No.	Components	Kandla						Vadinar	
		A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-8
1	Naphthalene	0.350	0.700	0.200	0.210	1.420	1.150	0.000	0.000
2	Acenaphthylene	0.070	0.010	0.150	0.850	0.390	0.480	0.070	0.000
3	Acenaphthene	0.020	0.060	0.380	0.080	0.610	0.000	0.000	0.000
4	Fluorene	0.450	0.320	0.210	0.260	0.200	0.00	0.000	0.000
5	Anthracene	0.350	0.380	0.320	0.540	0.310	0.120	0.110	0.000
6	Phenanthrene	0.080	0.085	0.090	0.090	0.000	0.220	0.080	0.000
7	Fluoranthene	0.700	0.720	0.540	0.210	0.580	0.350	0.000	0.000
8	Pyrene	0.090	0.540	0.320	0.650	0.690	0.250	0.090	0.000
9	Chrycene	0.810	1.250	0.580	0.490	0.710	1.150	0.180	0.110
10	Benz(a)anthracene	0.790	1.060	0.280	0.390	0.380	0.790	0.050	0.000
11	Benzo[k]fluoranthene	0.000	0.000	0.000	0.000	0.000	2.800	0.500	0.480
12	Benzo[b]fluoranthene	0.000	0.000	0.000	0.000	0.000	1.350	0.110	0.160
13	Benzopyrene	1.910	2.360	1.090	1.850	2.090	2.190	0.350	0.250
14	Indeno [1,2,3-cd] fluoranthene	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
15	Dibenz(ah)anthracene	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
16	Benzo[ghi]perylene	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Table 9: Summarized results of Non-methane VOC

Sr. No	Kandla						Vadinar	
	A-1	A-2	A-3	A-4	A-5	A-6	A-7	A-8
1	0	0	0	0	0	0	0	0

4.3 Data Interpretation and Conclusion

The results were compared with the National Ambient Air Quality Standards (NAAQS), 2009 of Central Pollution Control Board (CPCB).

- The concentration of PM_{10} at Kandla varies in the range of **92.03 to 346.25 $\mu\text{g}/\text{m}^3$** with an average value of **209.02 $\mu\text{g}/\text{m}^3$** . PM_{10} exceeded NAAQS of all the monitoring locations in Kandla. Whereas, at Vadinar, the concentration varies from **55.70 to 170.45 $\mu\text{g}/\text{m}^3$** , with an average value of **110.30 $\mu\text{g}/\text{m}^3$** .
- The elevated PM_{10} concentration at location A-5, the Coal Storage Area, can be attributed to several factors. Heavy vehicular traffic in upwind areas significantly contributes to the dispersion of particulate matter into the ambient air. The process of unloading coal directly onto trucks using grabs leads to the emission of coal dust into the air and its subsequent settling on the ground. This settled dust is re-entrained into the atmosphere as trucks travel through the area. Additionally, coal-loaded trucks are often not adequately covered with tarpaulin sheets, which exacerbates the suspension of coal particles during transit from vessels to the storage yard or site. These factors collectively contribute to increased PM_{10} levels in and around the Coal Storage Area and Marine.
- The $\text{PM}_{2.5}$ concentrations at Kandla varies from **15.24 to 55.46 $\mu\text{g}/\text{m}^3$** with average **34.36 $\mu\text{g}/\text{m}^3$** . The $\text{PM}_{2.5}$ concentration falls within the NAAQS limit for all locations of Kandla. Whereas, at Vadinar its concentration varies from **6.52 to 30.76 $\mu\text{g}/\text{m}^3$** with average **16.63 $\mu\text{g}/\text{m}^3$** . Also, due to construction and demolition all around the port contributing in increased particulate matter levels.
- The concentrations of PM_{10} at the Vadinar sampling locations are exceeding the limits prescribed by the National Ambient Air Quality Standards (NAAQS), primarily due to ongoing construction activities in the Vicinity.
- The concentration of SO_x varies from **6.23 to 22.41 $\mu\text{g}/\text{m}^3$** with average concentration as **9.59 $\mu\text{g}/\text{m}^3$** at Kandla and **5.03 to 8.12 $\mu\text{g}/\text{m}^3$** with average as **7.00 $\mu\text{g}/\text{m}^3$** at Vadinar. The average concentration of SO_x complies with the prescribed limit of NAAQS (80 $\mu\text{g}/\text{m}^3$) for both the monitoring site.
- The concentration of NO_x varies from **9.24 to 60.25 $\mu\text{g}/\text{m}^3$** with average **23.24 $\mu\text{g}/\text{m}^3$** at Kandla and **21.05 to 62.37 $\mu\text{g}/\text{m}^3$** with average **37.97 $\mu\text{g}/\text{m}^3$** at Vadinar. The concentration of NO_x falls within the prescribed limit of NAAQS i.e. 80 $\mu\text{g}/\text{m}^3$ at both the monitoring site of Kandla and Vadinar.
- The concentration of CO varies from **0.59 to 0.83 $\mu\text{g}/\text{m}^3$** with average **0.75 $\mu\text{g}/\text{m}^3$** at Kandla and **0.57 to 0.72 $\mu\text{g}/\text{m}^3$** with average **0.66 $\mu\text{g}/\text{m}^3$** at Vadinar. The concentration falls within the norm of 2 mg/m^3 specified by NAAQS at both the monitoring sites
- The concentration of **Total VOCs** levels was recorded in range of **0.05 to 0.23 $\mu\text{g}/\text{m}^3$** at Kandla and **in range of 0.06 to 0.23 $\mu\text{g}/\text{m}^3$** at the location of Vadinar respectively. The main source of VOCs in the ambient air may be attributed to the burning of Gasoline and Natural gas in Vehicle exhaust and burning fossil fuels, and garbage that release VOCs into the atmosphere. During the monitoring period, the wind flows towards South direction at Kandla, and hence the wind direction and speed also contribute to increased dispersion of pollutants from the upward areas towards the downward areas.
- **Benzene** was not detected on the location of Kandla & Vadinar.

- **Polycyclic Aromatic Hydrocarbons (PAHs)** are ubiquitous pollutants in urban atmospheres. Anthropogenic sources of total PAHs in ambient air emissions are greater than those that come from natural events. These locations are commercial areas where Vehicular activity and dust emission is common. PAHs are a class of chemicals that occur naturally in coal, crude oil, and gasoline. The higher concentration which results from burning coal, oil, gas, road dust, etc. Other outdoor sources of PAHs may be the industrial plants in-and-around the DPA premises.
- The Ambient air Monitoring location of Kandla recorded the **Non-methane VOC (NM-VOC)** concentration Value to be **0 $\mu\text{g}/\text{m}^3$** . While at Vadinar, the concentration of NM-VOC falls is found to be **0 $\mu\text{g}/\text{m}^3$** at both the location.

With reference to the Ambient Air Quality monitoring conducted under the study, it may be concluded that the particulate matter PM_{10} , were reported in higher concentration and apparently exceeds the NAAQ

S particularly at locations of Kandla., whereas $\text{PM}_{2.5}$ complies with the NAAQS at majority of the locations. For both the ambient air monitoring parameters (PM_{10} and $\text{PM}_{2.5}$), the major exceedance was observed at location A-5 i.e. Coal Storage Area. The gaseous pollutants (NO_x , SO_x , CO, VOCs etc.) falls within the permissible limit. The probable reasons contributing to these emissions of pollutants into the atmosphere in-and-around the port area are summarized as follows: -

1. **Port Machinery:** Port activities involve the use of various machinery and equipment, including cranes, for lifts, tugboats, and cargo handling equipment. These machines often rely on diesel engines, which can emit pollutants such as NO_x , Particulate matter, and CO. Older or poorly maintained equipment tends to generate higher emissions.
2. **Port Vehicles:** Trucks and other vehicles operating within port and port area contributes to air pollution. Similar to port machinery, diesel-powered vehicles can emit NO_x , PM, CO, and other pollutants such as PAH, VOCs etc. Vehicle traffic and congestion in and around port areas can exacerbate the air quality issues.
3. Apart from that, construction and demolition activities majorly contribute to particulate matter pollution.

4.4 Remedial Measures:

To improve air quality, DPA has implemented a number of precautionary measures, such as maintaining Green zone, initiated Inter-Terminal Transfer of tractor-trailers, Centralized Parking Plaza, providing shore power supply to tugs and port crafts, the use of LED lights at DPA area helps in lower energy consumption and decreases the carbon foot prints in the environment, time to time cleaning of paved and unpaved roads, use of tarpaulin sheets to cover dumpers at project sites etc. are helping to achieve the cleaner and green future at port. To address air pollution from port shipping activities, various measures that can be implemented are as follows:

- Practice should be initiated for using mask as preventative measure, to avoid Inhalation of dust particle-Mask advised in sensitive areas. Covering vehicles with tarpaulin during transportation will help to reduce the suspension of pollutants in air.

- Store fine particulate cargo (e.g., coal, fertilizers) in covered sheds or domes.
- Shrouding shall be carried out in the work site enclosing the dock/proposed facility area. This will act as dust curtain as well achieving zero dust discharge from the site. These curtain or shroud will be immensely effective in restricting disturbance from wind in affecting the dry dock operations, preventing waste dispersion, improving working conditions through provision of shade for the workers.
- Develop green belts using dust-tolerant species along port boundaries and roads.
- Frequent water sprinkling on roads to reduce dust suspension due to vehicular movement, this can be used during transporting coal to avoid suspension of coal dust.
- Use of proper transport methods, such as a conveyor belt, for excavated material and screens around the construction site.
- Temporary pavement of roads in construction site could considerably reduce dust emission. Prohibition of use of heavy diesel oil as fuel could be possibly reduce pollutants. Encouraging use of low-sulfur fuels (viz. Marine Gas Oil (MGO)/Liquefied Natural Gas (LNG), can significantly reduce sulfur and PM emissions from ships.
- Investing in infrastructure for cold ironing allows ships to connect to the electrical grid while docked, reducing the need for auxiliary engines and associated emissions.
- Implementing efficient cargo-handling processes, optimizing logistics to reduce congestion and idling times, and encouraging use of cleaner port machinery and vehicles can all contribute to reducing air pollution in port areas.



CHAPTER 5: DG STACK MONITORING

5.1 DG Stack Monitoring

A diesel generator is a mechanical-electrical machine that produces electrical energy (electricity) from diesel fuel. They are used by the residential, commercial, charitable and governmental sectors to provide power in the event of interruption to the main power, or as the main power source. Diesel generating (DG) sets are generally used in places without connection to a power grid, or as an emergency power supply if the grid fails. These DG sets utilize diesel as fuel and generate and emit the air pollutants such as Suspended Particulate Matter, SO₂, NO_x, CO, etc. from the stack during its functioning. The purpose of stack sampling is to determine emission levels from plant processes to ensure they are in compliance with any emission limits set by regulatory authorities to prevent macro environmental pollution. The stack is nothing but chimney which is used to disperse the hot air at a great height, emissions & particulate matters that are emitted. Hence, monitoring of these stacks attached to DG Sets is necessary in order to quantify the emissions generated from it.

As defined in scope by DPA, the monitoring of DG Stack shall be carried out at two locations, one at Kandla and one at Vadinar. The details of the DG Sets at Kandla and Vadinar have been mentioned in **Table 10** as follows:

Table 10: Details of DG Stack monitoring locations

Sr. No.	Location Code	Location Name	Latitude/ Longitude
1.	DG-1	Kandla	22.98916N 70.22083E
2.	DG-2	Vadinar	22.44155N 69.67419E

The map depicting the locations of DG Stack Monitoring to be monitored in Kandla and Vadinar have been mentioned in **Map 6 and 7** as follows:



Map 6: Locations for DG Stack monitoring at Kandla



Map 7: Locations for DG Stack monitoring at Vadinar

Methodology:

Under the study, the list of parameters to be monitored under the projects for DG Stack Monitoring has been mentioned in **Table 11** as follows:

Table 11: DG stack parameters

Sr. No.	Parameter	Unit	Instrument
1.	Suspended Particulate Matter	mg/Nm ³	Stack Monitoring Kit
2.	Sulphur Dioxide (SO ₂)	PPM	
3.	Oxides of Nitrogen (NO _x)	PPM	
4.	Carbon Monoxide	%	
5.	Carbon Dioxide	%	

The methodology for monitoring of DG Stack has been mentioned as follows:

The monitoring of DG Stack is carried out as per the IS:11255 and USEPA Method. The Stack monitoring kit is used for collecting representative samples from the stack to determine the total amount of pollutants emitted into the atmosphere in a given time. Source sampling is carried out from ventilation stack to determine the emission rates/or characteristics of pollutants. Sample collected must be such that it truly represents the conditions prevailing inside the stack. Whereas the parameters Sulphur Dioxide, Oxides of Nitrogen (NO_x), Carbon Monoxide and Carbon Dioxide, the monitoring is carried out by using the sensor-based Flue Gas Analyzer.

Frequency

Monitoring is required to be carried out once a month for both the locations of Kandla and Vadinar.

5.2 Result and Discussion

The sampling and monitoring of DG stack emission was carried out at Kandla and Vadinar and its comparison with CPCB or Indian standards for Industrial Stack Monitoring the flue gas emission from DG set has given in **Table 12**.

Table 12: DG monitoring data

Sr. No.	Stack Monitoring Parameters for DG Sets	Stack Monitoring Limits/ Standards As per CPCB	DG- 1 (Kandla)	DG-2 (Vadinar)
1.	Suspended Particulate Matter (SPM) (mg/Nm ³)	150	75.21	40.36
2.	Sulphur Dioxide (SO ₂) (PPM)	100	1.85	N.D.
3.	Oxides of Nitrogen (NO _x) (PPM)	50	30.45	18.54
4.	Carbon Monoxide (CO) (%)	1	0.29	0.07
5.	Carbon Dioxide (CO ₂) (%)	-	1.45	1.87

5.3 Data Interpretation and Conclusion

The results of DG stack emission are compared with the permissible limits mentioned in the consent issued by GPCB, and have been found within the prescribed limit for all the monitored parameters.

CHAPTER 6: NOISE MONITORING

6.1 Noise Monitoring

Noise can be defined as an unwanted sound, and it is therefore, necessary to measure both the quality as well as the quantity of environmental noise in and around the study area. Noise produced during operation stage and the subsequent activities may affect surrounding environment impacting the fauna and as well as the human population. Under the scope, the noise monitoring is required to be carried out at 10 locations in Kandla and 3 locations in Vadinar. The sampling locations for noise are not only confined to commercial areas of DPA but also the residential areas of DPA.

The details of the noise monitoring stations are mentioned in **Table 13** and locations have been depicted in the **Map 8 and 9** as follow:

Table 13: Details of noise monitoring locations

Sr. No.	Location Code	Location Name	Latitude/ Longitude
1.	Kandla	N-1	Oil Jetty 7
2.		N-2	West Gate No.1
3.		N-3	Canteen Area
4.		N-4	Main Gate
5.		N-5	Main Road
6.		N-6	Marin Bhavan
7.		N-7	Port & Custom Building
8.		N-8	Nirman Building
9.		N-9	ATM Building
10.		N-10	Wharf Area/ Jetty
11.	Vadinar	N-11	Near Main Gate
12.		N-12	Near Vadinar Jetty
13.		N-13	Port Colony Vadinar



Map 8: Locations for Noise Monitoring at Kandla



Map 9: Locations for Noise Monitoring at Vadinar

Methodology:

The intensity of sound energy in the environment is measured in a logarithmic scale and is expressed in a decibel (dB(A)) scale. The ordinary sound level meter measures the sound energy that reaches the microphone by converting it into electrical energy and then measures the magnitude in dB(A). Whereas, in a sophisticated type of sound level meter, an additional circuit (filters) is provided, which modifies the received signal in such a way that it replicates the sound signal as received by the human ear and the magnitude of sound level in this scale is denoted as dB(A). The sound levels are expressed in dB(A) scale for the purpose of comparison of noise levels, which is universally accepted. Noise levels were measured using an integrated sound level meter of the make Envirotech Sound Level Meter (Class-I) (model No. SLM-109). It has an indicating mode of L_p and L_{eq} . Keeping the mode in L_p for few minutes and setting the corresponding range and the weighting network in "A" weighting set the sound level meter was run for one-hour time and L_{eq} was measured at all locations.

Frequency

Monitoring was carried out at each noise monitoring station for L_{eq} noise level (Day and Night), which was recorded for 24 hours continuously at a monthly frequency with the help of Sound/Noise Level Meter (Class-1). The details of the noise monitoring have been mentioned in **Table 14**.

Table 14: Details of the Noise Monitoring

Sr. No.	Parameters	Units	Reference Method	Instrument
1.	L_{eq} (Day)	dB(A)	IS 9989: 2014	Noise Level Meter (Class-I) model No. SLM-109
2.	L_{eq} (Night)	dB(A)		

Standard for Noise

Ministry of Environment & Forests (MoEF) has notified the noise standards vide the Gazette notification dated February 14, 2000 for different zones under the Environment Protection Act (1986). The day time noise levels have been monitored from 6.00 AM to 10.00 PM and night noise levels were measured from 10.00 PM to 6.00 AM at all the thirteen locations (10 at Kandla and 3 at Vadinar) monthly. The specified standards are as mentioned in **Table 15** as follows:

Table 15: Ambient Air Quality norms in respect of Noise

Area Code	Category of Area	Noise dB(A) L_{eq}	
		Daytime	Night time
A	Industrial Area	75	70
B	Commercial Area	65	55
C	Residential Area	55	45
D	Silence Zone	50	40

6.2 Result and Discussion

The details of the Noise monitoring conducted during the monitoring period have been summarized in the **Table 16** as below:

Table 16: The Results of Ambient Noise Quality

Sr. No.	Station Code	Station Name	Category of Area	Standard	Day Time			Standard	Night Time		
					Max.	Min.	Leq dB(A) Total		Max.	Min.	Leq dB(A) Total
1	N-1	Oil Jetty 7	A	75	56.1	39.7	48.2	70	44.3	33.5	38.3
2	N-2	West Gate No.1	A	75	62.3	49.3	56.1	70	49.4	42.3	45.5
3	N-3	Canteen Area	B	65	61.2	45.7	53.8	55	44.7	33.2	40.2
4	N-4	Main Gate	A	75	60.3	44.1	53.9	70	48.7	38.6	46
5	N-5	Main Road	A	75	56.9	46.7	51.7	70	46.6	37.4	45.4
6	N-6	Marin Bhavan	B	65	59.8	40.5	52.2	55	49.7	35.2	45.7
7	N-7	Port & Custom Building	B	65	56.8	42.6	50.3	55	47.5	36.9	45.6
8	N-8	Nirman Building	B	65	55.1	42.5	49.1	55	46.8	38.5	45.4
9	N-9	ATM Building	B	65	59.8	42.5	52.6	55	49.7	38.6	45.8
10	N-10	Wharf Area/ Jetty	A	75	61.5	45.8	54.3	70	45.6	37.9	45.3
11	N-11	Near Main Gate	A	75	63.9	54.1	59	70	54.5	44	49.2
12	N-12	Near Vadinar Jetty	A	75	64.4	57.5	60.9	70	55	49.8	52.4
13	N-13	Port Colony Vadinar	C	55	42.6	36.2	39.4	45	38.6	31.3	34.9

6.3 Data Interpretation and Conclusion

The noise level at both the locations (Kandla and Vadinar) was compared with the standard limits specified in NAAQS by CPCB. During the Day Time, the average noise level at all 10 locations at Kandla ranged from **39.7 dB(A) to 62.3 dB(A)**, while at Vadinar, the noise levels for the three locations ranged from **36.2 dB(A) to 64.4 dB(A)**. Whereas, during Night Time the average Noise Level ranged from **33.2 dB(A) to 49.7 dB(A)** at Kandla and **31.3 dB(A) to 55 dB(A)** at Vadinar. In some locations at the Kandla site, spikes in noise levels were observed due to construction and demolition activities.

6.4 Remedial Measures

Though, the noise levels detected at the locations of Kandla and Vadinar, are found within the prescribed norms, the noise can further be considerably reduced by adoption of low noise equipment or installation of sound insulation fences. Green belt of plants can be a good barrier. If noise exceeds the applicable norms, then the working hours may be altered as a possible means to mitigate the nuisances of construction activities.

CHAPTER 7: SOIL MONITORING

7.1 Soil Quality Monitoring:

The purpose of soil quality monitoring is to track changes in the features and characteristics of the soil, especially the chemical properties of soil occurring at specific time intervals under the influence of human activity. Soil quality assessment helps to determine the status of soil functions and environmental risks associated with various practices prevalent at the location.

As defined in scope by Deendayal Port Authority (DPA), Soil Quality Monitoring shall be carried out at Six locations, four at Kandla and two at Vadinar. The details of the soil monitoring locations within the Port area of DPA are mentioned in **Table 17**:

Table 17: Details of the Soil quality monitoring

Sr. No.	Location Code	Location Name	Latitude Longitude
1.	Kandla	S-1	23.043527N 70.218456E
2.		S-2	23.040962N 70.216570E
3.		S-3	22.970382N 70.223057E
4.		S-4	23.033476N 70.158461E
5.	Vadinar	S-5	22.400026N 69.714308E
6.		S-6	22.440759N 69.675210E

Methodology

As per the defined scope by Deendayal Port Authority (DPA), the sampling and analysis of Soil quality has been carried out on monthly basis.

The samples of soil collected from the locations of Kandla and Vadinar and analyzed for the various physico-chemical parameter. Collection and analysis of these samples was carried out as per established standard methods and procedures. The samples were analyzed for selected parameters to get the present soil quality status and environmental risks associated with various practices prevalent at the location. GEMI has framed its own guidelines for collection of soil samples titled as '*Soil Sampling Manual*'. Soil samples were collected from 30 cm depth below the surface using scrapper, filled in polythene bags, labelled on-site with specific location code and name and sent to GEMI's laboratory, Gandhinagar for further detailed analysis. The samples collected from all locations are homogeneous representative of each location. The list of parameters to be monitored under the projects for the Soil Quality Monitoring been mentioned in **Table 18** as follows:


Frequency

Monitoring is required to be carried out once a month for both the locations of Kandla and Vadinar.

Table 18: Soil parameters

Sr. No.	Parameters	Units	Reference method	Instruments	
1.	TOC	%	Methods Manual Soil Testing in India January, 2011, 09. Volumetric method (Walkley and Black, 1934)	Titration Apparatus	
2.	Organic Carbon	%			
3.	Inorganic Phosphate	Kg/Hectare	Practical Manual Chemical Analysis of Soil and Plant Samples, ICAR-Indian Institute of Pulses Research 2017 Determination of Available Phosphorus in Soil	UV-Visible Spectrophotometer	
4.	Texture	-	Methods Manual Soil Testing in India January 2011,01	Hydrometer	
5.	pH	-	IS 2720 (Part 26): 1987	pH Meter	
6.	Conductivity	µS/cm	IS 14767: 2000	Conductivity Meter	
7.	Particle size distribution & Silt content	-	Methods Manual Soil Testing in India January 2011	Sieves Apparatus	
8.	SAR	meq/L	Procedures for Soil Analysis, International Soil Reference and Information Centre, 6 th Edition 2002 13-5.5.3 Sodium Absorption Ratio (SAR), Soluble cations	Flame Photometer	
9.	Water Holding Capacity	%	NCERT, Chapter 9, 2022-23 and Water Resources Department Laboratory Testing Procedure for Soil & Water Sample Analysis	Muffle Furnace	
10.	Aluminium	mg/Kg	EPA Method 3051A	ICP-OES	
11.	Chromium	mg/Kg			
12.	Nickel	mg/Kg			
13.	Copper	mg/Kg	Methods Manual Soil Testing in India January, 2011, 17a		
14.	Zinc	mg/Kg	Methods Manual Soil Testing in India January, 2011, 17a		
15.	Cadmium	mg/Kg	EPA Method 3051A		
16.	Lead	mg/Kg			
17.	Arsenic	mg/Kg			
18.	Mercury	mg/Kg			

The map depicting the locations of Soil Quality Monitoring to be monitored in Kandla and Vadinar have been mentioned in **Map 10 and 11** as follows:

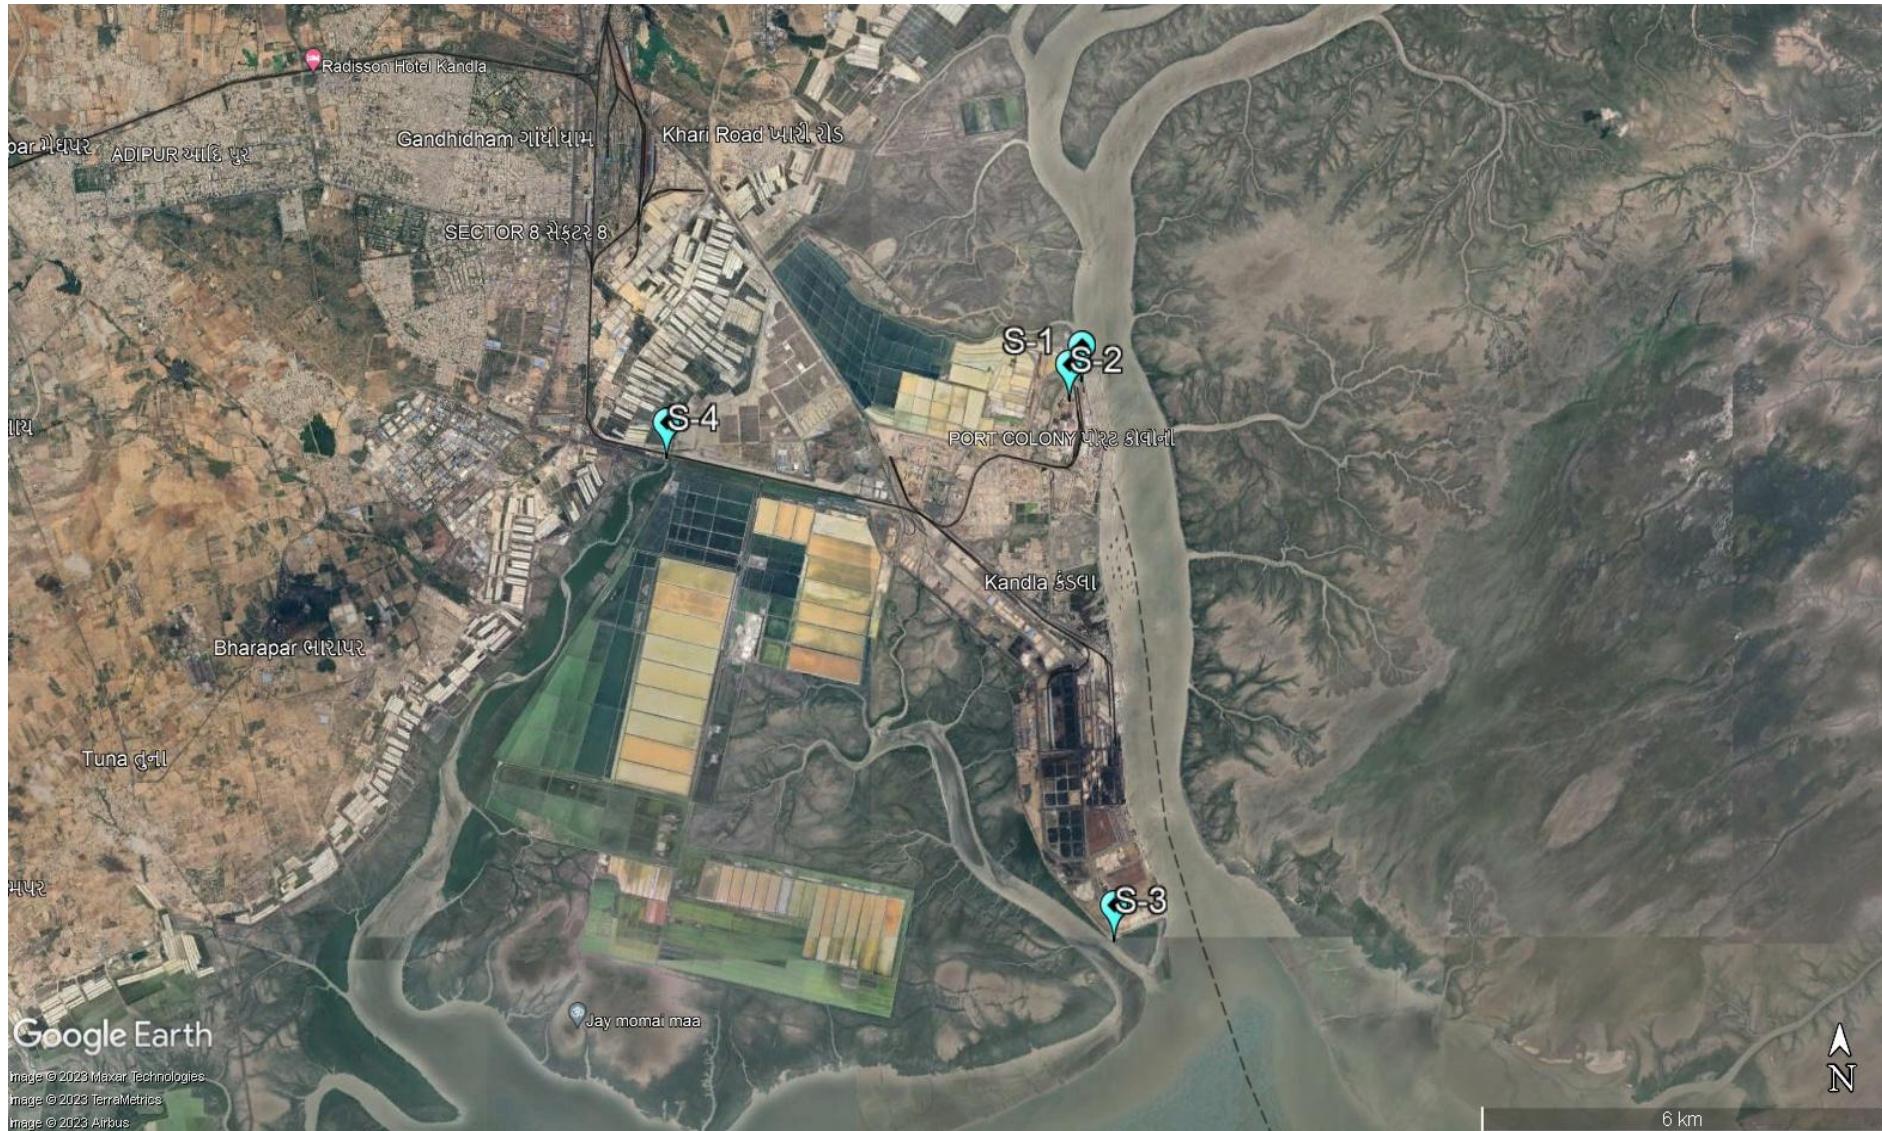

Map 10: Locations for Soil Quality Monitoring at Kandla



Map 11: Locations for Soil Quality Monitoring at Vadinar

7.2 Result and Discussion

The analysis results of physical analysis of the soil samples collected during environmental monitoring mentioned in **Table 19** are shown below:

Table 19: Soil Quality for the sampling period

Sr. No	Location Parameters	Unit	Kandla				Vadinar	
			S-1 (Oil Jetty 7)	S-2 IFFCO Plant)	S-3 (Khori Creek)	S-4 (Nakti Creek)	S-5 (Near SPM)	S-6 (Near Vadinar Jetty)
1	pH	-	8.41	8.36	9.1	8.52	8.09	7.93
2	Conductivity	µS/cm	11270	14052	221	14560	639	202
3	Inorganic Phosphate	Kg/ha	1.21	1.11	0.42	0.58	0.83	0.91
4	Organic Carbon	%	0.24	0.34	0.06	0.15	0.88	0.23
5	Organic Matter	%	0.37	0.68	0.08	0.27	1.52	0.39
6	SAR	meq/L	2.21	1.8	1.24	1.87	0.28	0.18
7	Aluminium	mg/Kg	7286.3	6076.32	5681.12	2856.3	21794.11	23212.33
8	Chromium	mg/Kg	74.45	72.31	104.6	45.36	73.27	76.89
9	Nickel	mg/Kg	34.26	30.63	32.42	16.3	35.55	29.33
10	Copper	mg/Kg	21.63	33.19	118.63	12.13	105.1	100.12
11	Zinc	mg/Kg	54.22	60.41	66.95	24.72	51.22	54.92
12	Cadmium	mg/Kg	BQL	BQL	BQL	BQL	BQL	BQL
13	Lead	mg/Kg	5.14	7.65	3.25	4.65	BQL	BQL
14	Arsenic	mg/Kg	6.67	6.98	BQL	4.09	BQL	0.08
15	Mercury	mg/Kg	BQL	BQL	BQL	BQL	BQL	BQL
16	Water Holding Capacity	%	68	59.36	55.61	51.91	32	20
17	Sand	%	26.36	36.47	82.36	67.56	84.24	94.24
18	Silt	%	59.14	67.63	18.16	32.18	14.72	4.72
19	Clay	%	27.61	6.82	7.52	6.62	1.04	1.04
20	Texture	-	slit sandy	Sandy loam	sandy loam	Loam	Loamy sand	Sand

7.3 Data Interpretation and Conclusion

Soil samples were collected from 6 locations (4 at Kandla and 2 at Vadinar) and further analysed for its physical & chemical characteristics. Each of the parameters have been given an interpretation based on the observations as follows:

- The value of **pH** ranges from **8.36 to 9.10**, highest at location S-3 (Khori Creek) and lowest at S-2 (IFFCO Plant) while the average pH for Kandla was observed to be **8.597**.

Whereas, at Vadinar the pH value observed at S-5 i.e., **Near SPM (8.09)** and at S-6 i.e., **Near Jetty Area (7.93)**. As per the observation the pH was found to be **moderately to strongly alkaline** both the monitoring station of Kandla and Vadinar.

- At entire monitoring locations of Kandla the value of **Electrical Conductivity** ranges from **221-14560 $\mu\text{s}/\text{cm}$** , highest at location S-4 (Nakti Creek) with the average as **10025.75 $\mu\text{s}/\text{cm}$** . Whereas, at Vadinar the range of conductivity was between the range of **202 to 639 $\mu\text{s}/\text{cm}$** with an average value of **420.5 $\mu\text{s}/\text{cm}$** .
- At Kandla, the concentration of **Inorganic Phosphate** varied from **0.42-1.21 Kg/ha**, with average **0.83 Kg/ha**. Whereas, at the locations of Vadinar, the Inorganic Phosphate was observed at S-5 i.e., Near SPM (**0.83 Kg/ha**) and detected at S-6 i.e., near Jetty Area (**0.91 Kg/ha**). The phosphorus availability in soil solution is influenced by a number of factors such as Organic matter, clay content, pH, temperature, etc.
- The concentration of **Total Organic Carbon** ranges from **0.06 to 0.34 %** while the average TOC at Kandla was detected as **0.197 %**. Whereas, at Vadinar the average TOC was found to be **0.55%** where the observed TOC value found at S-5 i.e. Near SPM (**0.88%**) and S-6 i.e. near Jetty Area to be **0.23 %** respectively.
- The concentration of **Water Holding Capacity** in the soil samples of Kandla and Vadinar varies from **51.91-68 %** and **20-32 %** respectively.
- The concentration of **Sodium Adsorption Ratio** ranges from **1.24-2.21 meq/L** with an average value **1.78 meq/L** at Kandla. Whereas, at Vadinar, the concentration of Sodium Adsorption Ratio ranges from **0.18 to 0.28 meq/L** with an average SAR was found to be **0.23 meq/L**. A component of conductivity is the SAR. A high SAR indicates a large concentration of sodium ions in the soil, which raises conductivity.

Sandy loam, loa, and silt sandy were the soil textures observed at all the monitoring locations of Kandla and Vadinar.

Heavy Metals

For the sampling period, the concentration of **Aluminium** varied from **2856.30 to 7286.30 mg/kg** at Kandla and **21794.11 to 23212.33 mg/kg** at Vadinar and the average value was observed to be **5475.01 and 22503.22 mg/kg** at Kandla and Vadinar monitoring station, respectively.

- The concentration of **Chromium** varied from **45.32 to 104.6 mg/kg** at Kandla and **73.27 to 76.89 mg/kg** at Vadinar and the average value was observed to be **74.18 and 75.08 mg/kg** at Kandla and Vadinar monitoring station, respectively.

- The concentration of **Nickel** varied from **16.3 to 34.26 mg/kg** at Kandla and **29.33 to 35.55 mg/kg** at Vadinar and the average value was observed to be **28.40 and 32.44 mg/kg** at Kandla and Vadinar monitoring station, respectively.
- The concentration of **Zinc** varied from **24.72 to 66.95 mg/kg** at Kandla and **51.22 to 54.92 mg/kg** at Vadinar and the average value was observed to be **51.57 and 53.07 mg/kg** at Kandla and Vadinar monitoring station, respectively.
- The concentration of **copper** varied from **12.13 to 118.63 mg/kg** at Kandla and **100.12 to 105.1 mg/kg** at Vadinar and the average value was observed to be **46.39 and 102.61 mg/kg** at Kandla and Vadinar monitoring station, respectively.
- The concentration of **Arsenic** varied from **4.09 to 6.98 mg/kg** at Kandla and the average value was observed to be **5.913** at Kandla while at Vadinar the average value was observed to be **0.08**
- The concentration of **Lead** varied from **3.25 to 7.65 mg/kg** at Kandla and the average value was observed to be **5.172** at Kandla while at Vadinar the average value was observed to be **BQL**.
- While other heavy metals in the Soil i.e., **Mercury, Cadmium** were observed "Below Quantification Limit" for majority of the soil samples collected at Kandla and Vadinar.

CHAPTER 8: DRINKING WATER MONITORING

8.1 Drinking Water Monitoring

It is necessary to check with the drinking water sources regularly so as to know whether water quality conforms to the prescribed standards for drinking. Monitoring the drinking water quality is essential to protect human health and the environment. With reference to the scope specified by DPA, a total of 20 locations (18 at Kandla and 2 at Vadinar) were monitored to assess the Drinking Water quality. The DW-2 location was replaced by Shramdeep due to demolition of past sampling location (port & custom building)

The details of the drinking water sampling stations have been mentioned in **Table 20** and the locations have been depicted through Google map in **Map 12 and 13**.

Table 20: Details of Drinking Water Sampling Locations

Sr. No.	Location Code	Location Name	Latitude/ Longitude
1.	Kandla	DW-1	23.043527N 70.218456E
2.		DW-2	23.009631N, 70.220877E
3.		DW-3	23.007938N 70.222411E
4.		DW-4	23.009372N 70.222236E
5.		DW-5	23.003707N 70.221331E
6.		DW-6	23.006771N 70.217340E
7.		DW-7	23.009779N 70.221838E
8.		DW-8	23.009642N 70.220623E
9.		DW-9	23.018930N 70.214478E
10.		DW-10	23.019392N 70.212619E
11.		DW-11	22.997833N 70.223042E
12.		DW-12	23.018061N 70.212328E
13.		DW-13	23.061914N 70.144861E
14.		DW-14	23.083619N 70.132061E
15.		DW-15	23.078830N 70.131008E
16.		DW-16	23.083306N 70.132422E
17.		DW-17	23.077347N 70.135731E
18.		DW-18	23.081850N 70.135347E
19.	Vadinar	DW-19	22.440759N 69.675210E
20.		DW-20	22.401619N 69.716822E



Map 12: Locations for Drinking Water Monitoring at Kandla



Map 13: Locations for Drinking Water Monitoring at Vadinar

Methodology

The water samples were collected from the finalized sampling locations and analysed for physico-chemical and microbiological parameter, for which the analysis was carried out as per APHA, 23rd Edition and Indian Standard method in GEMI's NABL Accredited Laboratory, Gandhinagar. GEMI has followed the CPCB guideline as well as framed its own guidelines for the collection of water/wastewater samples, under the provision of Water (Preservation and Control of Pollution) Act 1974, titled as '**Sampling Protocol for Water & Wastewater**'; approved by the Government of Gujarat vide letter no. ENV-102013-299-E dated 24-04-2014. The samples under the study were collected and preserved as per the said Protocol. The parameters finalized to assess the drinking water quality have been mentioned in **Table 21** as follows:

Table 21: List of parameters for Drinking Water Quality monitoring

Sr. No.	Parameters	Units	Reference method	Instrument
1.	pH	-	APHA, 23 rd Edition (Section-4500-H ⁺ B):2017	pH Meter
2.	Colour	Hazen	APHA, 23 rd Edition, 2120 B:2017	Color Comparator
3.	EC	µS/cm	APHA, 23 rd Edition (Section-2510 B):2017	Conductivity Meter
4.	Turbidity	NTU	APHA, 23 rd Edition (Section -2130 B):2017	Nephlo Turbidity Meter
5.	TDS	mg/L	APHA, 23 rd Edition (Section-2540 C):2017	Vacuum Pump with filtration assembly and Oven
6.	TSS	mg/L	APHA, 23rd Edition, 2540 D: 2017	
7.	Chloride	mg/L	APHA, 23 rd Edition (Section-4500-Cl-B):2017	Titration Apparatus
8.	Total Hardness	mg/L	APHA, 23 rd Edition (Section-2340 C):2017	
9.	Ca Hardness	mg/L	APHA, 23 rd Edition (Section-3500-Ca B):2017	
10.	Mg Hardness	mg/L	APHA, 23 rd Edition (Section-3500-Mg B):2017	
11.	Free Residual Chlorine	mg/L	APHA 23rd Edition, 4500	
12.	Fluoride	mg/L	APHA, 23 rd Edition (Section-4500-F-D):2017	UV- Visible Spectrophotometer
13.	Sulphate	mg/L	APHA, 23 rd Edition (Section 4500-SO ₄ -2-E):2017	
14.	Sodium	mg/L	APHA, 23 rd Edition (Section-3500-Na-B):2017	Flame Photometer
15.	Potassium	mg/L	APHA,23 rd Edition, 3500 K-B: 2017	
16.	Salinity	mg/L	APHA, 23rd Edition (section 2520 B, E.C. Method)	Salinity /TDS Meter
17.	Nitrate	mg/L	APHA, 23 rd Edition, 4500 NO ₃ - B: 2017	UV- Visible Spectrophotometer

Sr. No.	Parameters	Units	Reference method	Instrument
18.	Nitrite	mg/L	APHA, 23 rd Edition, 4500 NO2-B: 2017	
19.	Hexavalent Chromium	mg/L	APHA, 23 rd Edition, 3500 Cr B: 2017	
20.	Manganese	mg/L	APHA,23 rd Edition, ICP Method 3120 B: 2017	ICP-OES
21.	Mercury	mg/L	EPA 200.7	
22.	Lead	mg/L	APHA ICP 23 rd Edition (Section-3120 B):2017	
23.	Cadmium	mg/L	APHA ICP 23 rd Edition (Section-3120 B):2017	
24.	Iron	mg/L	APHA ICP 23 rd Edition (Section-3120 B):2017	
25.	Total Chromium	mg/L	APHA ICP 23 rd Edition (Section-3120 B):2017	
26.	Copper	mg/L	APHA,23 rd Edition, ICP Method 3120 B: 2017	
27.	Zinc	mg/L	APHA ICP 23 rd Edition (Section-3120 B):2017	ICP-OES
28.	Arsenic	mg/L	APHA ICP 23 rd Edition (Section-3120 B):2017	
29.	Total Coliforms	MPN/ 100ml	IS 15185: 2016	LAF/ Incubator

8.2 Result and Discussion

The drinking water quality of the locations at Kandla and Vadinar and its comparison with the to the stipulated standard (Drinking Water Specifications i.e., IS: 10500:2012) have been summarized in **Table 22** as follows:

Table 22: Summarized results of Drinking Water quality

Sr. No.	Parameters	Units	Standard values as per IS		Kandla																		Vadinar		
			A	P	DW-1	DW-2	DW-3	DW-4	DW-5	DW-6	DW-7	DW-8	DW-9	DW-10	DW-11	DW-12	DW-13	DW-14	DW-15	DW-16	DW-17	DW-18	DW-19	DW-20	
1.	pH	-	6.5-8.5	-	7.52	7.85	7.43	7.74	7.51	7.22	7.21	7.45	7.13	7.01	7.11	7.14	7.25	7.42	6.85	7.32	7.41	7.22	7.02	7.26	
2.	Colour	Hazen	5	15	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
3.	EC	µS/cm	-	-	256	25.6	35.2	31.2	45.8	74.2	30.1	32.3	81.4	122.5	147.5	120.9	56.8	48.2	120	15.6	27.7	98.7	256	100.2	
4.	Salinity	PSU	-	-	0.18	0.07	0.02	0.04	0.01	0.06	0.04	0.05	0.06	0.04	0.09	0.07	0.04	0.01	0.07	0.02	0.03	0.04	0.18	0.03	
5.	Turbidity	NTU	1	5	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
6.	Chloride	mg/L	250	1000	51.23	4.58	12.65	18.51	9.74	16.23	7.52	10.22	26.35	30.25	41.56	25.62	19.19	14.21	38.52	15.24	14.16	26.72	45.26	18.25	
7.	Total Hardness	mg/L	200	600	8	BQL	6	5.5	7	9	2	3.5	5	15	13	20	3.5	2.5	16	BQL	1.5	7	155	50	
8.	Ca Hardness	mg/L	-	-	3	BQL	4	2	4.5	6	1.5	2	3	10	7	12	2	2	9	BQL	1	4	72	15	
9.	Mg Hardness	mg/L	-	-	5	BQL	2	3.5	2.5	3	BQL	1.5	2	5	6	8	1.5	BQL	7	BQL	BQL	3	75	15	
10.	Free Residual Chlorine	mg/L	0.2	1	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
11.	TDS	mg/L	500	2000	122	10	18	20	25	36	17	19	35	55	96	55	32	35	82	19	25	51	150	42	
12.	TSS	mg/L	-	-	BQL	BQL	3	BQL	BQL	BQL	BQL	2	BQL	BQL	2	BQL	BQL	4	BQL	BQL	1	BQL	BQL	BQL	
13.	Fluoride	mg/L	1.0	1.5	0.231	BQL	0.42	BQL	0.56	0.212	0.316	BQL	0.398	0.35	0.31	0.299	0.254	0.244	0.412	0.42	0.202	0.314	0.541	0.158	
14.	Sulphate	mg/L	200	400	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	25.36	BQL	
15.	Nitrate	mg/L	45	-	6.214	BQL	BQL	BQL	BQL	BQL	BQL	BQL	1.245	BQL	BQL	BQL	1.01	BQL	BQL	BQL	BQL	BQL	BQL	1.236	BQL
16.	Nitrite	mg/L	-	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
17.	Sodium	mg/L	-	-	30.21	BQL	1.23	4.25	1.52	1.21	1.2	2.01	3.02	3.58	3.98	5.12	3.25	2.36	8.51	1.01	1.21	2.65	15.24	BQL	

Sr. No.	Parameters	Units	Standard values as per IS		Kandla																		Vadinar		
			A	P	DW-1	DW-2	DW-3	DW-4	DW-5	DW-6	DW-7	DW-8	DW-9	DW-10	DW-11	DW-12	DW-13	DW-14	DW-15	DW-16	DW-17	DW-18	DW-19	DW-20	
18.	Potassium	mg/L	-	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
19.	Hexavalent Chromium	mg/L	-	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
20.	Odour	TON	Agreeable		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
21.	Arsenic	mg/L	0.01	0.05	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
22.	Cadmium	mg/L	0.003	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
23.	Copper	mg/L	0.05	1.5	BQL	BQL	0.010	BQL	0.004	BQL	BQL	BQL	0.003	0.010	0.003	0.015	BQL	BQL	0.008						
24.	Iron	mg/L	0.3	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
25.	Lead	mg/L	0.01	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
26.	Manganese	mg/L	0.1	0.3	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
27.	Mercury	mg/L	0.001	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
28.	Total Chromium	mg/L	0.05	-	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
29.	Zinc	mg/L	5	15	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL	
30.	Total Coliform*	MPN/100ml	Shall not be detected		50	10	30	BQL	BQL	80	BQL	50	BQL	BQL	15	BQL	BQL	BQL	BQL	23	BQL	BQL	BQL	20	

A: Acceptable, P:Permissible, BQL: Below Quantification limit; Turbidity (QL=0.5 NTU), Free Residual Chlorine (QL=2 mg/L), Total Suspended Solids (QL=2 mg/L), Fluoride (QL=0.3 mg/L), Sulphate (QL=10 mg/L), Nitrate as NO₃ (QL=1 mg/L), Nitrite as NO₂ (QL=0.1mg/L), Sodium as Na (QL=5mg/L), Potassium as K (QL=5mg/L), Hexavalent Chromium (QL=0.01 mg/L), Arsenic (QL=0.005 mg/L), Cadmium (QL=0.002 mg/L), Copper (QL=0.005 mg/L), Iron (QL=0.1mg/L), Lead (QL=0.002 mg/L), Manganese (QL=0.04 mg/L), Mercury (QL=0.0005 mg/L), Total Chromium (QL=0.005 mg/L), Zinc (QL=0.5 mg/L), Total Coliforms (QL=1 MPN/ 100ml)

AQL: Above Quantification Limit; Total Coliforms (QL=1000000)

*Note: For Total Coliform, one MPN is equivalent to one CFU. The use of either method; MPN or CFU for the detection of bacteria are considered valid measurements for bacteria limits.

8.3 Data Interpretation and Conclusion

Drinking water samples were taken at 20 locations (18 at Kandla and 2 at Vadinar), and their physical and chemical properties were analyzed. The analysis's results were compared with standard values as prescribed in IS 10500:2012 Drinking Water Specification.

- **pH:** The pH values of drinking water samples in Kandla were reported to be in the range of **6.85 to 7.85** with an average pH of **7.32**. In Vadinar, its values ranged from **7.02 to 7.26**, with an average pH of **7.14**. remarkably, the pH values at project locations are within the permissible range of 6.5 to 8.5 specified under IS: 10500:2012.
- **Colour:** The value of Color in Drinking water sample at Kandla is found to be **1 Hazen** in each sample. In Vadinar the Color value is found to be **1 Hazen** in both the locations.
- **Turbidity:** At the drinking water locations of Kandla & Vadinar, the turbidity was reported **BQL** for All the monitoring location.
- **Total Dissolved Solids (TDS):** Monitoring TDS is crucial because it provides an indication of overall quality of the water. During the monitoring period, the TDS concentrations in Kandla were observed to vary in a wide range i.e., between **10 to 122 mg/L**, with an average concentration of **41.77 mg/L**. while in Vadinar, it ranged from **42 to 150 mg/L**, with average at **96 mg/L**.

It is important to note that the TDS concentrations in both Kandla and Vadinar fall well within the acceptable limit of 500 mg/L.

- **Electrical Conductivity (EC):** It is a measure of the ability of a solution to conduct electric current, and it is often used as an indicator of the concentration of dissolved solids in water. During the monitoring period, the EC values for samples collected in Kandla were observed to range from **15.6 to 256 µS/cm**, with an average value of **76.09 µS/cm**. In Vadinar, the EC values showed variation from **100.2 to 256 µS/cm**, with an average value of **178.10 µS/cm**. It's important to regularly monitor EC levels in drinking water as it can provide valuable information about water quality and presence of dissolved substances.
- **Chlorides:** The concentrations in the drinking water samples collected from Kandla and Vadinar were within acceptable limits, as specified by the BIS. The chloride in Kandla varied from **4.58 to 51.23 mg/L**, with an average value of **21.25 mg/L**. In Vadinar, it ranged from **18.25 to 45.26 mg/L**, with an average value of **31.76 mg/L**. It's important to note that all the recorded chloride concentrations in both Kandla and Vadinar were well below the acceptable limit of 250 mg/L.
- **Total Hardness (TH):** Total Hardness varied from **1.5 to 20 mg/L**, with the average value as **7.78 mg/L**. While at Vadinar, the variation was observed from **50 to 155 mg/L**; with the average concentration of **102.50 mg/L**. It's important to note that all the recorded chloride concentrations in both Kandla and Vadinar were well below the acceptable limit of 200 mg/L.
- **Sulphate:** During monitoring period in Kandla and Vadinar, the sulphate concentrations were found to be within the acceptable limits i.e., 200 mg/L as per the specified norms. In Kandla, the sulphate concentrations Was found to be **Below Quantification Limit** at all Monitoring locations. In Vadinar, the sulphate

concentration was observed at DW-19 is **25.36 mg/L** & DW-20 is **Below Quantification Limit**.

- **Sodium:** During the monitoring period, at Kandla variation in the concentration of sulphate was observed to be in the range of **1.01 to 30.21 mg/L**, with the average concentration of **4.48 mg/L**. While at Vadinar, the Sodium concentration was Observed to be in range of **BQL to 15.24 mg/L**, with the average Concentration of **15.24 mg/L**.
- **Nitrate:** During the monitoring period, at Kandla & Vadinar variation in the concentration of Nitrate was observed to be in the range of **1.01 to 6.21 mg/L**, with the average concentration of **2.82 mg/L** also majority of the location recorded as "**BQL**". While at Vadinar, the concentration was observed at DW-19 is **1.23 mg/L** & DW-20 is **Below Quantification Limit**.
- **Fluoride:** The concentration was found to be in the range of **0.20 to 0.56 mg/L** with an average concentration of **0.32 mg/L** at all the monitoring location at Kandla. While at Vadinar the concentration was found to be in the range of **0.15 to 0.54 mg/L** with an average concentration of **0.35 mg/L** for both the monitoring location.
- **Nitrite:** The Concentration was found to be **BQL** in all the monitoring location at Kandla. While at Vadinar its value also reported to be BQL for both the Monitoring location.
- **Iron:** The Concentration was found to be **BQL** in all of the monitoring location for location at Kandla While at Vadinar, the Concentration recorded as Below Quantification Limit.
- **Copper:** During the monitoring period, at Kandla variation in the concentration of copper was observed to be in the range of **0.003 to 0.015 mg/L**, with the average concentration of **0.007 mg/L**. While at Vadinar, the concentration was observed at DW-19 is **Below Quantification limit** & DW-20 is **0.008**
- **TSS:** The Concentration was found to be **BQL** in most of the monitoring location except for location DW-3 (North Gate) i.e. 3 mg/L, DW-8 (Nirman Building) i.e. 2 mg/L and DW-11 (Wharf Jetty Area) i.e. 2 mg/L and more locations at Kandla. While at Vadinar, the Concentration was observed at DW-19 & DW-20 is **Below Quantification limit**.
- **Free Residual Chlorine:** The Concentration was found to be **BQL** in all of the monitoring location at Kandla While at Vadinar, the Concentration recorded at both location is found Below Quantification Limit.
- **Lead:** The Concentration was found to be **BQL** in all of the monitoring location at Kandla. While at Vadinar, the Concentration recorded as Below Quantification Limit at all the Monitoring locations.
- **Potassium:** The Concentration was found to be **BQL** in all of the monitoring location at Kandla While at Vadinar, the Concentration was found to be BQL in both Location.
- **Manganese:** The Concentration was found to be **BQL** in all of the monitoring location at Kandla While at Vadinar, the Concentration was found to be BQL in both Location.
- **Zinc:** The Concentration was found to be **BQL** in all of the monitoring location at Kandla While at Vadinar, the Concentration was found to be BQL in both Location.

- **Arsenic:** The concentration was found to be **Below Quantification Limit** in all of the Monitoring Location at Kandla. While at Vadinar was Observed **Below Quantification Limit** at both the locations.
- The parameters such as **Hexavalent Chromium**, and the metals like **Cadmium, Total Chromium** were all observed to have concentrations “Below the Quantification Limit (BQL)” at majority of the locations during the monitoring period.
- **Total Coliforms:** During the monitoring period, at Kandla variation in the concentration of Total coliform was observed to be in the range of **BQL to 80 MPN/100ml**. While at Vadinar, the concentration recorded at DW-19 is **Below Quantification Limit** and at DW-20 is **20 MPN/100ml**.

8.4 Remedial Measures

Appropriate water treatment processes should be administered to eradicate coliform bacteria. The methods of disinfection such as **chlorination, ultraviolet (UV), or ozone** etc, apart from that, filtration systems can also be implemented to remove bacteria, sediment, and other impurities.

The following steps can be implemented to ensure that the water being supplied is safe for consumption:

- Regular monitoring should be carried out to assess the quality of drinking water at various stages, including the source, purification plants, distribution network, and consumer endpoints would help in early detection of coliform bacteria or other contaminants in the drinking water.
- It is necessary to carry out a system assessment to determine whether the drinking-water supply chain (up to the point of consumption) as a whole can deliver water of a quality that meets identified targets. This also includes the assessment of design criteria of the treatment systems employed.
- Identifying control measures in a drinking-water system that will collectively control identified risks and ensure that the health-based targets are met. For each control measure identified, an appropriate means of operational monitoring should be defined that will ensure that any deviation from required performance (water quality) is rapidly detected in a timely manner.
- Management and communication plan should be formulated describing actions to be taken during normal operation as well as during incident conditions (such as drinking water contamination) and documenting the same.



CHAPTER 9: SEWAGE TREATMENT PLANT MONITORING

9.1 Sewage Treatment Plant (STP) Monitoring:

The principal objective of STP is to remove contaminants from sewage to produce an effluent that is suitable to discharge to the surrounding environment or an intended reuse application, thereby preventing water pollution from raw sewage discharges. As defined in the scope by Deendayal Port Authority (DPA), Kandla, the STP Monitoring is to be carried out weekly at three locations, one at Kandla, one at Gopalpuri and one STP at Vadinar. The samples from the inlet and outlet of the STP have been collected weekly. The details of the locations of STP to be monitored for Kandla and Vadinar have been mentioned in **Table 23** as follows:

Table 23: Details of the monitoring locations of STP

Sr. No.	Location Code	Location Name	Latitude Longitude
1.	Kandla	STP-1	STP Kandla
2.		STP-2	STP Gopalpuri
3.	Vadinar	STP-3	STP at Vadinar

The Consolidated Consent and Authorization (CC&A) issued by the GPCB were referred for the details of the STP for Kandla and Gopalpuri. The CC&A of Kandla and Gopalpuri entails that the treated domestic sewage should conform to the norms specified in **Table 24**. The treated effluent conforming to the norms shall be discharged on the land within the premises strictly for the gardening and plantation purpose. Whereas, no sewage shall be disposed outside the premises in any manner.

Table 24: Treated effluent Standards (as per CC&A of Kandla STP)

Sr. No.	Parameters	Prescribed limits
1.	pH	6.5-8.5
2.	BOD (3 days at 27°C)	30 mg/L
3.	Suspended Solids	100 mg/L
4.	Fecal Coliform	< 1000 MPN/100 ml

The detailed process flow diagram of the Kandla and Gopalpuri STP have been mentioned in **Figure 3 and 4** as follows:

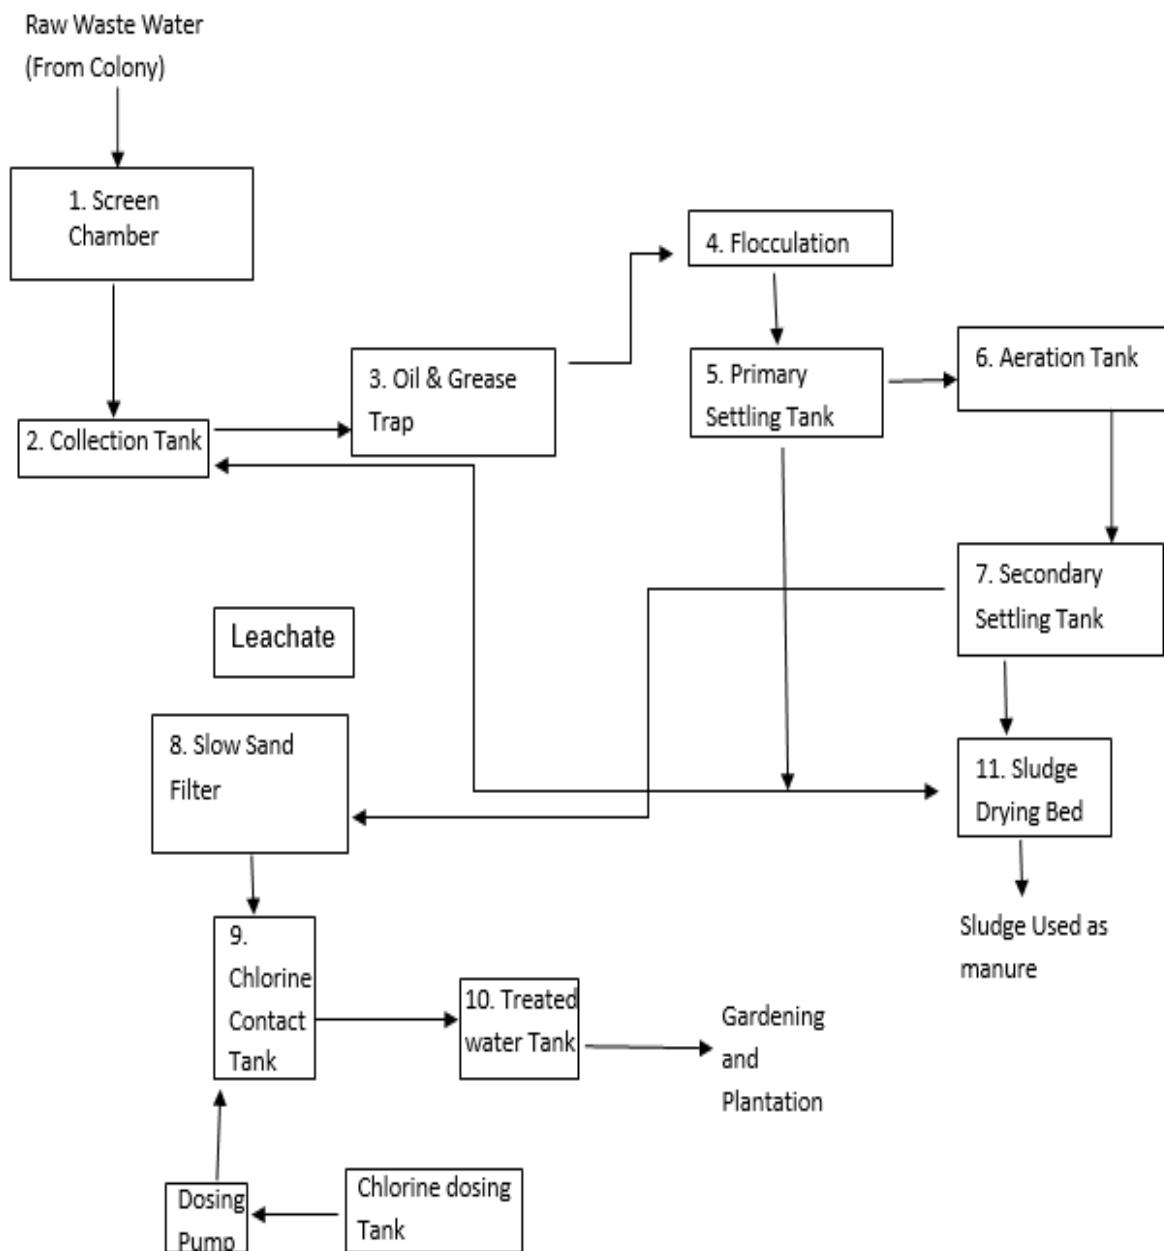


Figure 3: Process flow diagram of STP at Kandla

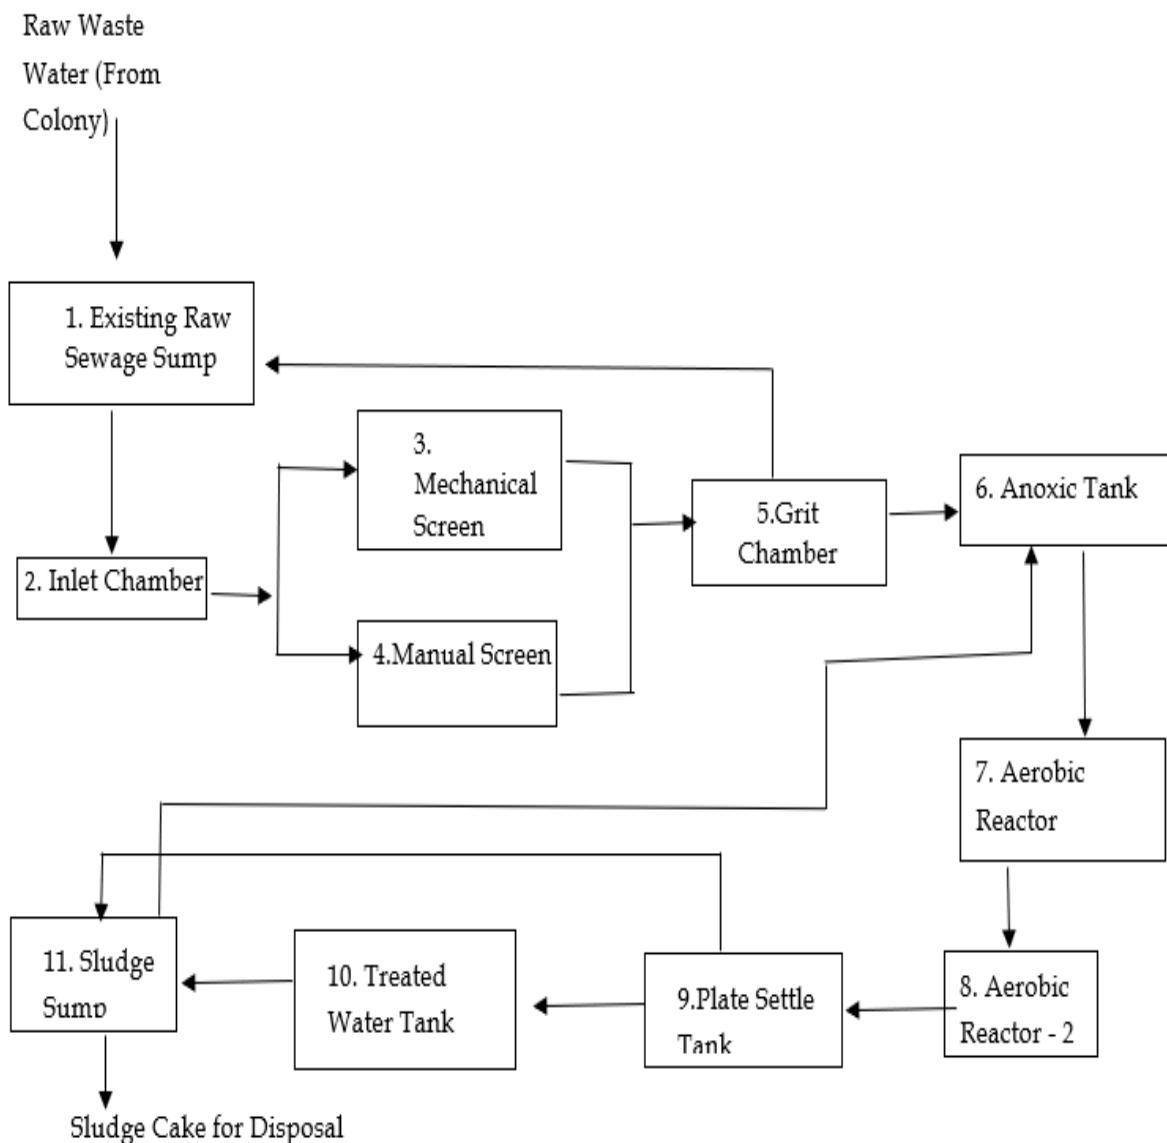


Figure 4: Process flow diagram of STP at Gopalpuri

STP at Vadinar

The STP at Vadinar has been built with a treatment capacity of 450 KLD/day. The Consolidated Consent and Authorization (CC&A) issued by the GPCB has been referred for the details of the said STP. The CC&A of the Vadinar STP suggests that the domestic effluent generated shall be treated as per the norms specified in **Table 25**. The treated effluent conforming to the norms shall be discharged on the land within the premises strictly for the gardening and plantation purpose. Whereas, no sewage shall be disposed outside the premises in any manner.

Table 25: Norms of treated effluent as per CC&A of Vadinar STP

Sr. No.	Parameters	Prescribed limits
1.	pH	5.5-9
2.	BOD (3 days at 27°C)	10 mg/L
3.	Suspended Solids	20 mg/L
4.	Fecal Coliform	Desirable 100 MPN/100 ml Permissible 230 MPN/100 ml
5.	COD	50 mg/L

The detailed process flow diagram of the Vadinar STP have been mentioned in **Figure 5** as follows:


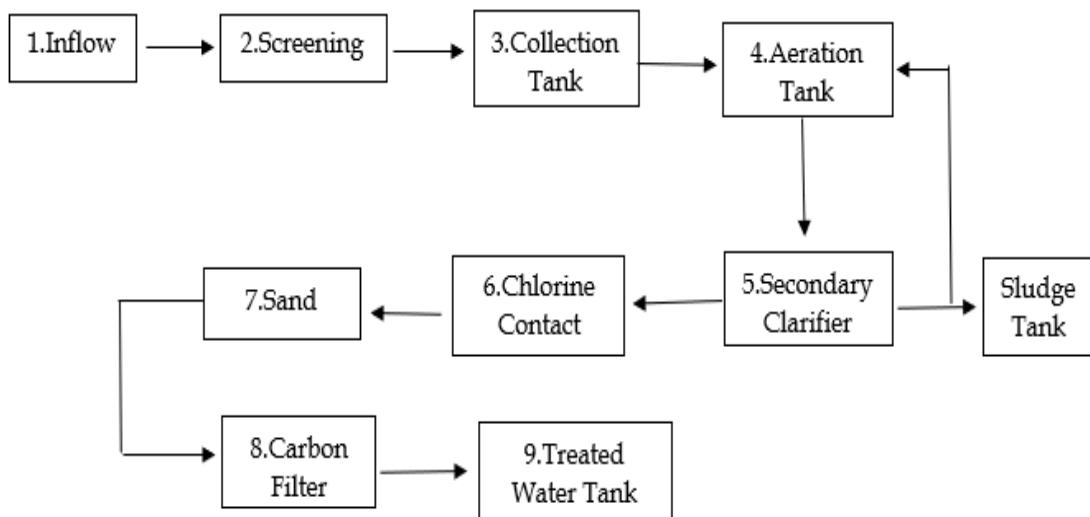


Figure 5: Process flowchart for the STP at Vadinar

The map depicting the locations of STP to be monitored in Kandla and Vadinar have been shown in **Map 14 and 15** as follows:



Map 14: Locations for STP Monitoring at Kandla

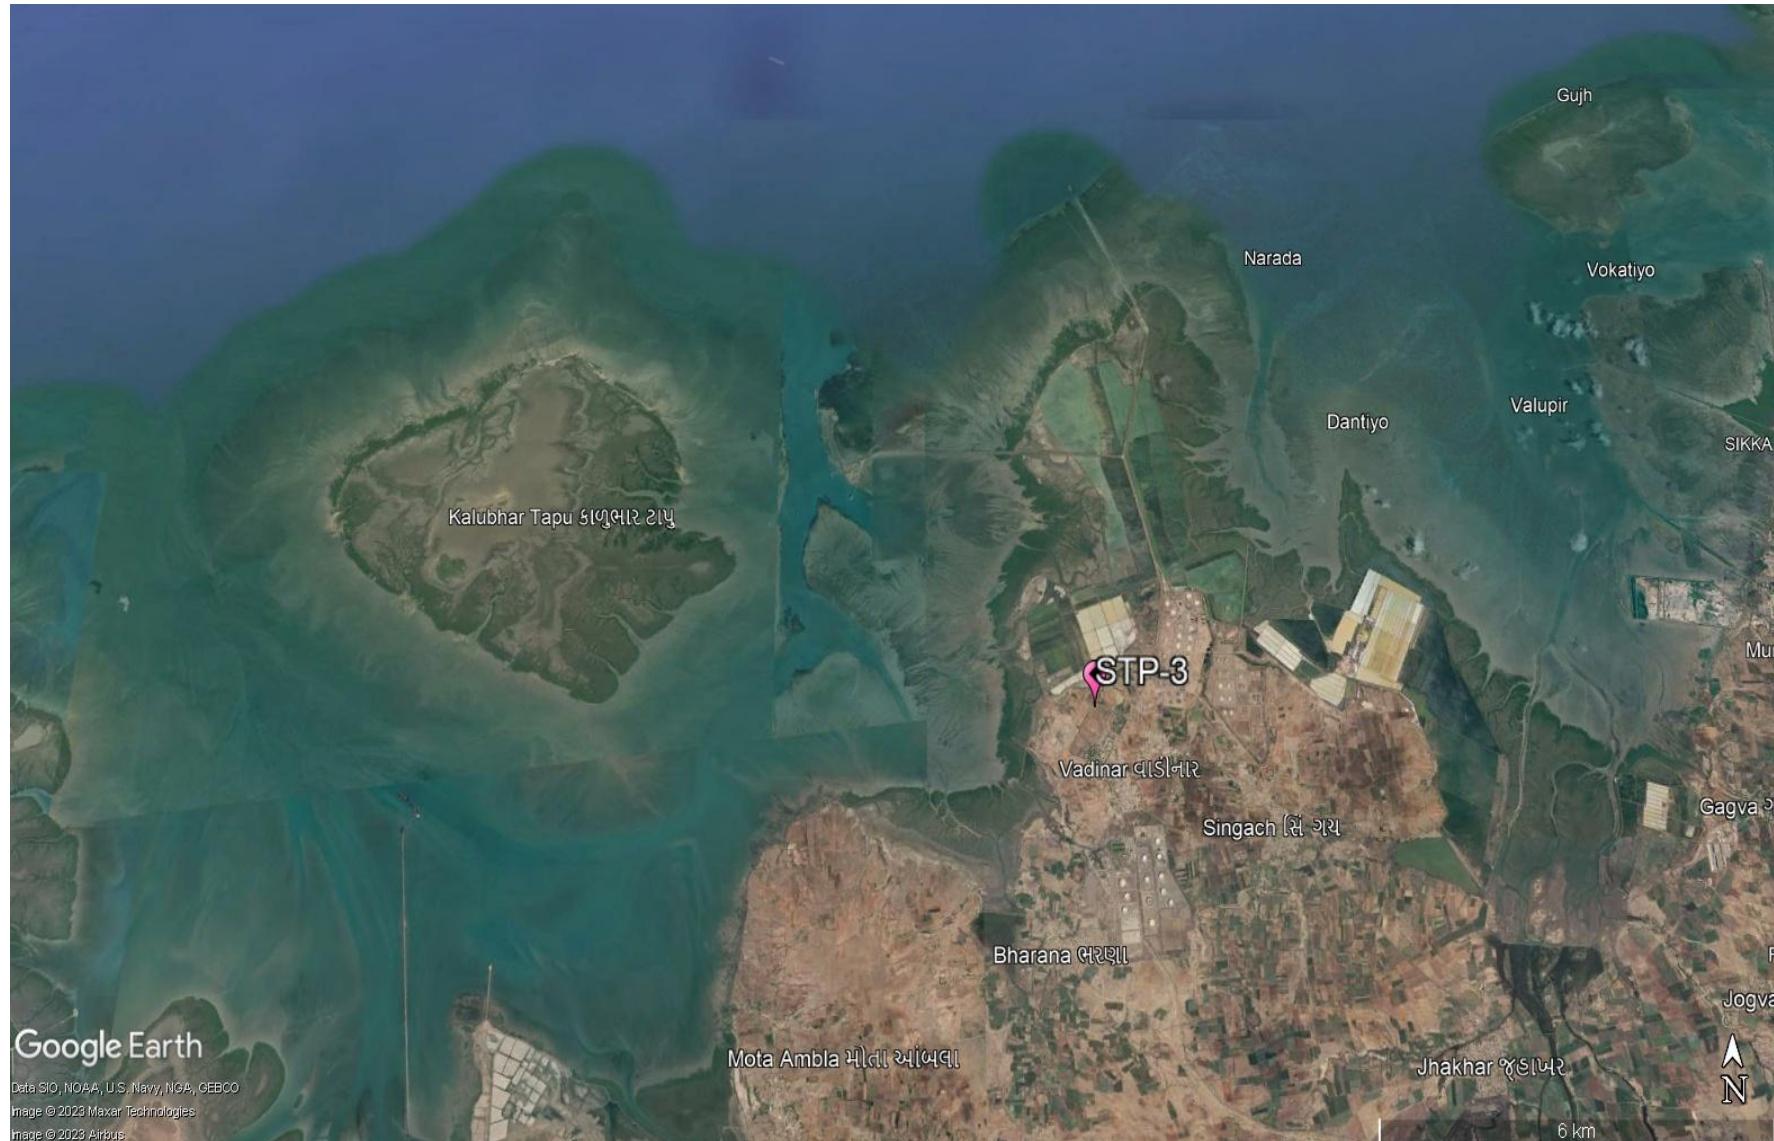

Map 15: Locations for STP Monitoring at Vadinar

Methodology

As per the defined scope by DPA, the sampling and analysis of water samples from the inlet and outlet of the STP's of Kandla and Vadinar are carried out once a week, i.e., four times a month.

The water samples were collected from inlet and the outlet of the STP's and analyzed for physico-chemical and microbiological parameter. Collection and analysis of these samples was carried out as per established standard methods and procedures for the examination of water. The samples were analyzed for selected parameters to establish the existing water quality of the inlet and outlet points of the STP. GEMI has framed its own guidelines for collection of water/wastewater samples titled as 'Sampling Protocol for Water & Wastewater'; which has been approved by the Government of Gujarat vide letter no. ENV-102013-299-E dated 24-04-2014 under the provision of Water (Preservation and Control of Pollution) Act 1974. The sample collection and preservation are done as per the said Protocol. Under the project, the list of parameters to be monitored for the STP have been mentioned in **Table 26** as follows:

Frequency

Monitoring is required to be carried out once a week for monitoring location of Kandla and Vadinar i.e., two STP station at Kandla and one STP station at Vadinar.

Table 26: List of parameters monitored for STP's at Kandla and Vadinar

Sr. No.	Parameters	Units	Reference method	Instruments
1.	pH	-	APHA, 23 rd edition, 4500- H ⁺ B, 2017	pH Meter
2.	TDS	mg/L	APHA, 23 rd Edition, 2540 C: 2017	Vacuum Pump with filtration assembly and Oven
3.	TSS	mg/L		
4.	DO	mg/L	APHA, 23 rd Edition, 4500 C: 2017	Titration Apparatus
5.	COD	mg/L	APHA, 23 rd Edition, 5220 B: 2017	Titration Apparatus plus Digester
6.	BOD	mg/L	IS-3025, Part 44, 1993	BOD Incubator plus Titration Apparatus
7.	SAR	meq/L	IS 11624: 2019	Flame Photometer
8.	Total Coliforms	MPN/100ml	IS 1622: 2019	LAF/ Incubator

9.2 Result and Discussion

Analytical results of the STP samples collected from the inlet and the outlet of the STP's of Kandla and Vadinar have been summarized in **Table 27 & 28**. Further it was compared with the standard norms specified in the CC&A of the respective STPs.



Environmental Monitoring Report of Deendayal Port Authority, September - October 2025

Table 27: Water Quality of inlet and outlet of STP of Kandla

Sr No.	Parameter	Units	GPCB Norms (Kandla)	Kandla															
				Week 3 of September				Week 4 of September				Week 1 of October				Week 2 of October			
				STP-1 (Inlet)	STP-1 (Outlet)	STP-2 (Inlet)	STP-2 (Outlet)	STP-1 (Inlet)	STP-1 (Outlet)	STP-2 (Inlet)	STP-2 (Outlet)	STP-1 (Inlet)	STP-1 (Outlet)	STP-2 (Inlet)	STP-2 (Outlet)	STP-1 (Inlet)	STP-1 (Outlet)	STP-2 (Inlet)	STP-2 (Outlet)
1.	pH	-	6.5-8.5	7.45	7.12	7.01	7.12	7.22	7.06	7.57	7.61	7.55	7.32	7.02	7.46	7.35	7.10	7.40	7.23
2.	TDS	mg/L	-	1326	1255	1508	1425	1412	1302	1792	1764	1295	1122	1662	1652	1326	1250	1744	1625
3.	TSS	mg/L	100	45	16	44	20	40	25	96	26	70	32	36	14	39	22	38	20
4.	COD	mg/L	-	112	45.0	115.2	28.8	155	101	174.8	61.0	101.3	42.6	72.6	40.3	120.0	70.0	133.6	36.4
5.	DO	mg/L	-	BQL	3.2	BQL	4.9	BQL	2.5	BQL	6.1	BQL	4.2	BQL	8.8	BQL	3.1	BQL	8.6
6.	BOD	mg/L	30	26.34	19.4	17.28	3.60	22.33	11.2	26.22	7.62	40.25	16.32	14.52	5.04	30.12	11.56	25.05	4.55
7.	SAR	meq/L	-	12.24	4.55	6.35	5.85	6.22	3.21	7.72	7.03	9.25	6.14	5.58	5.12	7.51	3.01	7.73	7.19
8.	Total Coliforms	MPN/100ml	<1000	1600	120	1600	BQL	240	23	900	23	1600	220	30	BQL	900	23	23	240

Table 28: Water Quality of inlet and outlet of STP of Vadinar

Sr No.	Parameter	Units	GPCB Norms (Vadinar)	Vadinar							
				Week 3 of September		Week 4 of September		Week 1 of October		Week 2 of October	
				STP-3 (Inlet)	STP-3 (Outlet)	STP-3 (Inlet)	STP-3 (Outlet)	STP-3 (Inlet)	STP-3 (Outlet)	STP-3 (Inlet)	STP-3 (Outlet)
1.	pH	-	5.5-9	6.92	6.98	7.50	7.58	7.70	7.60	7.31	7.37
2.	TDS	mg/L	-	384	346	424	362	374	348	412	328
3.	TSS	mg/L	20	6	4	20	4	12	2	6	4
4.	COD	mg/L	50	82.3	41.2	122.0	36.6	92.7	44.4	93.1	24.3
5.	DO	mg/L	-	2.5	5.6	1.5	6.0	4.8	7.9	2.5	3.2
6.	BOD	mg/L	10	15.43	5.14	18.30	4.57	17.39	5.54	13.97	3.04
7.	SAR	meq/L	-	2.52	2.25	1.97	1.82	1.49	1.40	1.87	1.56
8.	Total Coliforms	MPN/100ml	100-230	240	23	1600	4	240	2	1600	23

BQL: Below Quantification limit; Total Suspended Solids (QL=2), Dissolved Oxygen (QL=0.5), Biochemical Oxygen Demand (QL=3 mg/L)

9.3 Data Interpretation and Conclusion

For physicochemical analysis, the treated sewage water was gathered from the Kandla STP, Gopalpuri STP, and Vadinar STP and the analytical results were compared with the standards mentioned in the Consolidated Consent and Authorization (CC&A) by GPCB.

- The **pH** of treated effluent from STPs at Kandla (STP-1 and STP-2) and Vadinar (STP-3) conform to their respective stipulated norms of **7.06 to 7.61** at Kandla and **6.98 to 7.60** at Vadinar respectively.
- The **TDS** of treated sewage at Kandla was ranges from **1122 to 1764 mg/L**, whereas for Vadinar it ranges from **328 to 362 mg/L**.
- The **TSS** of the Treated effluent for the STP-1 and STP-2 at Kandla and STP-3 at Vadinar falls within the stipulated norms of **14 to 32 mg/L** and **2 to 4 mg/L** respectively as mentioned in their respective CCA.
- **COD** value for Kandla was observed in the range of **28.80 to 101 mg/L**. Whereas for Vadinar the value of COD falls within the range of **24.30 to 44.40 mg/L**.
- The value of **DO** was observed in the range of **2.50 to 8.80 mg/L** at Kandla, whereas for Vadinar it was observed in the range of **3.20 to 7.90 mg/L**.
- The **BOD** of the outlet for the STPs of Kandla and Vadinar falls within the stipulated norms.
- The value of **SAR** for Kandla was observed in the range of **3.01 to 7.19 meq/L**, whereas for Vadinar, it was observed in the range of **1.40 to 2.25 meq/L**.
- The value of **Total Coliforms** for Kandla was observed in the range of **23 to 240 MPN/100 ml**, whereas for Vadinar, it was observed in the range of **2 to 23 MPN/100 ml**.

During the monitoring period, only Total Coliforms were observed to be exceeding the limits at STPs of Kandla and Vadinar while rest of the treated sewage parameters for STP outlet were within norms as specified under the CCA at both the monitoring sites. Regular monitoring of the STP performance should be conducted on regular basis to ensure adequate treatment as per the norms.

9.4 Remedial Measures:

- The quantum of raw sewage (influent) entering the STP should be monitored by installation of the flow meter. If the quantity of the sewage exceeds the treatment capacity of the treatment plant, then provision of additional capacity of collection sump should be provided.
- The adequacy and efficacy of the stages of Sewage treatment units shall be conducted.
- The results show the presence of total coliforms; hence the method of disinfection (Chlorination) sodium or calcium Hypochlorite can be used.
- Effectiveness of any technology depends on factors such as the specific pollutants in the wastewater, plant size, local regulations, and available resources. There are several processes that may be implemented such as - Advanced oxidation process involve using strong oxidants to break down complex organic compounds. Methods like Fenton's

reagent (hydrogen peroxide and iron catalyst) and UV/H₂O₂ treatment can help in reducing COD through oxidation.

- Electrochemical processes like Electrocoagulation (EC) and Electrooxidation (EO) that involve the application of an electric current to facilitate the removal of pollutants through coagulation, flocculation, and oxidation. These methods can be useful for treating sewage containing various pollutants.



CHAPTER 10: MARINE WATER QUALITY MONITORING

10.1 Marine Water

Deendayal Port is one of the largest ports of the country and thus, is engaged in wide variety of activities such as movement of large vessels, oil tankers and its allied small and medium vessels and handling of dry cargo several such activities whose waste if spills in water, can cause harmful effects to marine water quality.

Major water quality concerns at ports include wastewater and leakage of toxic substances from ships, stormwater runoff, etc. This discharge of wastewater, combined with other ship wastes which includes sewage and wastewater from other on-board uses, is a serious threat to the water quality as well as to the marine life. As defined in the scope by DPA, the Marine Water sampling and analysis has to be carried out at a total of eight locations, six at Kandla and two at Vadinar. The marine water sampling has been carried out with the help of Niskin Sampler with a capacity of 5L. The Niskin Sampler is a device used to take water samples at a desired depth without the danger of mixing with water from other depths. Details of the locations to be monitored have been mentioned in **Table 29**:

Table 29: Details of the sampling locations for Marine water

Sr. No.	Location Code	Location Name	Latitude Longitude
1.	Kandla	MW-1 Near Passenger Jetty One	23.017729N 70.224306E
2.		MW-2 Kandla Creek (nr KPT Colony)	23.001313N 70.226263E
3.		MW-3 Near Coal Berth	22.987752N 70.227923E
4.		MW-4 Khori Creek	22.977544N 70.207831E
5.		MW-5 Nakti Creek (nr Tuna Port)	22.962588N 70.116863E
6.		MW-6 Nakti Creek (nr NH-8A)	23.033113N 70.158528E
7.	Vadinar	MW-7 Near SPM	22.500391N 69.688089E
8.		MW-8 Near Vadinar Jetty	22.440538N 69.667941E

The map depicting the locations of Marine Water to be sampled and analysed for Kandla and Vadinar have been mentioned in **Map 16 and 17** as follows:



Map 16: Locations for Marine Water Monitoring at Kandla



Map 17: Locations for Marine Water Monitoring at Vadinar

Methodology

The methodology adopted for the sampling and monitoring of Marine Water was carried out as per the '**Sampling Protocol for Water & Wastewater**' developed by GEMI. The water samples collected through the Niskin Sampler are collected in a clean bucket to reduce the heterogeneity. The list of parameters to be monitored under the project for the Marine Water quality have been mentioned in **Table 30** along with the analysis method and instrument.

Frequency:

As defined in the scope by DPA, the sampling and analysis of Marine Water has to be carried out once in a month at the eight locations (i.e., six at Kandla and two at Vadinar).

Table 30: List of parameters monitored for Marine Water

Sr. No	Parameters	Units	Reference method	Instrument
1.	Electrical Conductivity	µS/cm	APHA, 23 rd Edition (Section-2510 B):2017	Conductivity Meter
2.	Dissolved Oxygen (DO)	mg/L	APHA, 23 rd Edition, 4500 O C, 2017	Titration Apparatus
3.	pH	-	APHA, 23 rd Edition (Section-4500-H+B):2017	pH meter
4.	Color	Hazen	APHA, 23 rd Edition, 2120 B: 2017	Color comparator
5.	Odour	-	IS 3025 Part 5: 2018	Heating mantle & odour bottle
6.	Turbidity	NTU	IS 3025 Part 10: 1984	Nephlo Turbidity Meter
7.	Total Dissolved Solids (TDS)	mg/L	APHA, 23 rd Edition (Section-2540 C):2017	Vacuum Pump with Filtration Assembly and Oven
8.	Total Suspended Solids (TSS)	mg/L	APHA, 23 rd Edition, 2540 D: 2017	
9.	Particulate Organic Carbon	mg/L	APHA, 23 rd Edition, 2540 D and E	TOC analyser
10.	Chemical Oxygen Demand (COD)	mg/L	IS-3025, Part- 58: 2006	Titration Apparatus plus Digester
11.	Biochemical Oxygen Demand (BOD)	mg/L	IS-3025, Part 44,1993,	
12.	Silica	mg/L	APHA, 23 rd Edition, 4500 C, 2017	UV- Visible Spectrophotometer
13.	Phosphate	mg/L	APHA, 23 rd Edition, 4500 P-D: 2017	
14.	Sulphate	mg/L	APHA, 23 rd Edition, 4500 SO4-2 E: 2017	
15.	Nitrate	mg/L	APHA, 23 rd Edition, 4500 NO3-B: 2017	

Sr. No	Parameters	Units	Reference method	Instrument
16.	Nitrite	mg/L	APHA, 23 rd Edition, 4500 NO2- B: 2017	
17.	Sodium	mg/L	APHA, 23 rd Edition, 3500 Na-B: 2017	Flame photometer
18.	Potassium	mg/L	APHA, 23 rd Edition, 3500 K-B: 2017	
19.	Manganese	µg/L	APHA, 23 rd Edition, ICP Method 3120 B: 2017	ICP-OES
20.	Iron	mg/L	APHA, 23 rd Edition, ICP Method 3120 B: 2017	
21.	Total Chromium	µg/L	APHA, 23 rd Edition, 3500 Cr B: 2017	
22.	Hexavalent Chromium	µg/L		UV- Visible Spectrophotometer
23.	Copper	µg/L	APHA, 23 rd Edition, ICP Method 3120 B: 2017	ICP-OES
24.	Cadmium	µg/L		
25.	Arsenic	µg/L		
26.	Lead	µg/L		
27.	Zinc	mg/L		
28.	Mercury	µg/L	EPA 200.7	
29.	Floating Material (Oil grease scum, petroleum products)	mg/L	APHA, 23 rd Edition, 5520 C: 2017	Soxhlet Assembly
30.	Total Coliforms (MPN)	MPN/ 100ml	IS 1622: 2019	LAF/ Incubator

10.2 Result and Discussion

The quality of the Marine water samples collected from the locations of Kandla and Vadinar during the monitoring period has been summarized in the **Table 31**. The said water quality has been represented in comparison with the standard values as stipulated by CPCB for Class SW-IV Waters.

Table 31: Results of Analysis of Marine Water Sample for the sampling period

Sr. No .	Parameters	Unit	Primary Water Quality Criteria for Class SW-IV Waters	Kandla						Vadinar	
				MW-1	MW-2	MW-3	MW-4	MW-5	MW-6	MW-7	MW-8
1.	Density	kg/m ³	-	1.021	1.022	1.022	1.021	1.023	1.022	1.022	1.021
2.	pH	-	6.5-9.0	7.21	7.45	7.92	7.54	7.50	7.89	7.23	7.65
3.	Color	Hazen	No Noticeable	1	1	1	1	1	1	5	5
4.	EC	µS/cm	-	51,500	52,100	51,200	51,100	51,600	51,000	52,600	53,100
5.	Turbidity	NTU	-	146	160	179	152	101	79	13.25	10.25
6.	TDS	mg/L	-	37,156	37,521	37,125	37,159	37,212	36,247	36,298	34,156
7.	TSS	mg/L	-	256	229	261	215	219	202	250	292
8.	COD	mg/L	-	38.5	59.3	42.5	35.0	65.8	53.6	62.45	45.21
9.	DO	mg/L	3.0 mg/L	7.2	6.5	7.3	6.8	6.3	6.8	7.9	6.5
10.	BOD	mg/L	5.0 mg/L	3.1	3.9	3.5	BQL	BQL	4.2	BQL	BQL
11.	Oil & Grease	mg/L	-	BQL							
12.	Sulphate	mg/L	-	2545.2	2687.2	2715.36	2456.31	2511.42	2356.8	2685	2945.36
13.	Nitrate	mg/L	-	3.154	3.358	3.658	3.314	3.111	3.251	1.625	1.248
14.	Nitrite	mg/L	-	BQL	BQL	0.195	BQL	BQL	BQL	BQL	BQL
15.	Phosphate	mg/L		BQL							
16.	Silica	mg/L	-	4.89	4.26	4.31	4.1	3.89	4.16	1.36	1.11
17.	Sodium	mg/L	-	3,621.0	3,815.0	4,329.0	6,258.0	4,936.0	3,947.0	>10000	>10000
18.	Potassium	mg/L	-	136.0	142.0	149.0	202.0	175.0	161.0	498.0	522.00
19.	Hexavalent Chromium	mg/L	-	BQL							
20.	Odour	-	-	1	1	1	1	1	1	1	1
21.	Arsenic	mg/L	-	BQL							
22.	Cadmium	mg/L	-	BQL							
23.	Copper	mg/L	-	BQL							
24.	Iron	mg/L	-	1.526	1.625	1.322	1.42	1.369	0.612	0.263	BQL
25.	Lead	mg/L	-	BQL							
26.	Manganese	mg/L	-	0.054	0.075	0.051	0.067	0.040	0.026	BQL	BQL
27.	Total Chromium	mg/L	-	BQL							
28.	Zinc	mg/L	-	BQL							
29.	Mercury	mg/L	-	BQL							
30.	Particulate Organic Carbon	mg/L	-	1.56	1.52	1.72	1.35	1.22	0.45	0.05	BQL
31.	Total Coliforms	MPN/100 ml	500/100 ml	6	12	2	16	8	20	12	20

Sr. No .	Parameters	Unit	Primary Water Quality Criteria for Class SW-IV Waters	Kandla						Vadinar	
				MW-1	MW-2	MW-3	MW-4	MW-5	MW-6	MW-7	MW-8
32.	Floating Material (Oil grease scum, petroleum products)	mg/L	10 mg/L	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL

10.3 Data Interpretation and Conclusion

The Marine water quality of Deendayal Port Harbor waters at Kandla and Vadinar has been monitored for various physico-chemical and biological parameters during the monitoring period. The detailed interpretation of the parameters in comparison to the Class SW-IV for Harbour Waters is as follows:

- **Density** at Kandla was observed in the range of **1.021 to 1.023 kg/m³**, with the average of **1.02 kg/m³**. Whereas for the location of Vadinar, it was observed **1.022 kg/m³** at MW-7 and **1.021 kg/m³** at MW-8, with the average of **1.022 kg/m³**.
- **pH** at Kandla was observed in the range of **7.21 to 7.92**, with the average pH as **7.59**. Whereas for the locations of Vadinar, it was observed in the range of be **7.23 to 7.65**, with the average pH as **7.44**. For the monitoring location of both the study areas, pH was found to comply with the norms of 6.5-8.5.
- **Color** range varied from **1 Hazen** at all the monitoring locations in Kandla, and for Vadinar, it found **5 Hazen** for the both of the location.
- **Electrical conductivity (EC)** was observed in the range of **51,000 to 52,100 µS/cm**, with the average EC as **51,416.67 µS/cm** for the locations of Kandla, whereas for the locations of Vadinar, it was observed in the range of **52,600 to 53,100 µS/cm**, with the average EC as **52,850 µS/cm**.
- For all monitoring locations of Kandla the value of **Turbidity** was observed in the range of **79 to 179 NTU**, with average value of **136.17 NTU**. For Vadinar it ranges from **10.25 to 13.25 NTU**, with average of **11.75 NTU**. Materials that cause water to be turbid include clay, silt, finely divided organic and inorganic matter, soluble coloured organic compounds, plankton and microscopic organisms. Turbidity affects the amount of light penetrating to the plants for photosynthesis.
- For the monitoring locations at Kandla the value of **Total Dissolved Solids (TDS)** ranged from **36,247 to 37,521 mg/L**, with an average value of **37,070 mg/L**. Similarly, at Vadinar, the TDS values ranged from **34,156 to 36,298 mg/L**, with an average value of **35,227 mg/L**.
- **TSS** values in the studied area varied between **202 to 261 mg/L** at Kandla and **250 to 292 mg/L** at Vadinar, with the average value of **230.33 mg/L** and **271 mg/L** respectively for Kandla and Vadinar.

- COD varied between **35 to 65.8 mg/L** at Kandla and **45.21 to 62.45 mg/L** at Vadinar, with the average value as **49.12 and 53.83 mg/L** respectively for Kandla and Vadinar.
- DO level in the studied area varied between **6.3 to 7.3 mg/L** at Kandla and **6.5 to 7.9 mg/L** at Vadinar, with the average value of **6.82 mg/L and 7.20 mg/L** respectively for Kandla and Vadinar. Which represents that the marine water is suitable for marine life.
- BOD observed was observed in the range of **3.1 to 4.2 mg/L**, with average of **3.68 mg/L** for the location of Kandla and for the locations of Vadinar, it was detected **Below Quantification Limit** for all sampling locations.
- Sulphate concentration in the studied area varied between **2356.81 to 2715.36 mg/L** at Kandla and **2685 to 2945.36 mg/L** at Vadinar. The average value observed at Kandla was **2545.39 mg/L**, whereas **2815.18 mg/L** was the average value of Vadinar. Sulphate is naturally formed in inland waters by mineral weathering or the decomposition and combustion of organic matter.
- Nitrate in the study area was observed in the range of **3.111 to 3.658 mg/L**, with the average of **3.31 mg/L**. Whereas for the Vadinar, recorded value was observed in the range of **1.248 to 1.625 mg/L**, with the average of **1.437 mg/L**.
- In the study area of Kandla the concentration of Potassium varied between **136 to 202 mg/L** and **498 to 522 mg/L** at Vadinar, with the average value as **160.83 mg/L and 510 mg/L** respectively for Kandla and Vadinar.
- Silica in the studied area varied between **3.89 to 4.89 mg/L**, with the average of **4.27 mg/L**, at Kandla. Vadinar, observed value was found to be **1.36 mg/L** at location MW-7 and **1.11 mg/L** at MS-8 location.
- Sodium in the study area varied between **3621 to 6258 mg/L**, with average of **4484.33 mg/L**, at Kandla whereas at Vadinar the sodium concentration value was detected to be **more than 10,000 mg/L** at both locations.
- Odour was observed **1** for all locations of Kandla and Vadinar.
- Copper in the study area, was detected **below the quantification limit (BQL)"** at Kandla and whereas Vadinar was detected **below the quantification limit (BQL)"** for the all-sampling location.
- Iron in the studied area varied between **0.61 to 1.62 mg/L**, with the average of **1.31 mg/L**, at Kandla, and for Vadinar value were recorded **0.263 mg/L** for location MW-7 and **Below Quantification Limit** for location MW-8.
- Lead concentration at Kandla was detected **below the quantification limit (BQL)"** for the all-sampling location. and whereas Vadinar was detected **below the quantification limit (BQL)"** for the all-sampling location.
- Manganese in the studied area varied between **0.026 to 0.075 mg/L**, with the average of **0.052 mg/L**, at Kandla and whereas Vadinar was detected **below the quantification limit (BQL)"** for the all-sampling location.
- Particulate Organic Carbon in the study area was observed in the range of **0.45 to 1.72**, with the average value of **1.30**. Whereas for the Vadinar, the value observed was **0.05** at MW-7 and **Below Quantification Limit** at MW-8.

- **Oil & Grease, Nitrite, Phosphate, Hexavalent Chromium, Arsenic, Cadmium, Total Chromium, Zinc, Mercury and Floating Material (Oil grease scum, petroleum products)** were observed to have concentrations “**Below the Quantification Limits (BQL)**” for most of the locations of Kandla and Vadinar.
- **Total Coliforms** were detected complying with the specified norm of 500 MPN/100ml for all the locations of Kandla and Vadinar.

During the Monitoring period, marine water samples were analysed and found in line with Primary Water Quality criteria for class-IV Waters (For Harbour Waters).

However, as a safeguard towards marine water pollution prevention, appropriate regulations on ship discharges and provision of reception facilities are indispensable for proper control of emissions and effluent from ships. Detection of spills is also important for regulating ship discharges. Since accidental spills are unavoidable, recovery vessels, oil fences, and treatment chemicals should be prepared with a view to minimizing dispersal. Proper contingency plans and a prompt reporting system are keys to prevention of oil dispersal. Periodical clean-up of floating wastes is also necessary for preservation of port water quality.

CHAPTER 11: MARINE SEDIMENT QUALITY MONITORING

11.1 Marine Sediment Monitoring

Marine sediment, or ocean sediment, or seafloor sediment, are deposits of insoluble particles that have accumulated on the seafloor. These particles have their origins in soil and rocks and have been transported from the land to the sea, mainly by rivers but also by dust carried by wind. The unconsolidated materials derived from pre-existing rocks or similar other sources by the process of denudation are deposited in water medium are known as sediment. For a system, like a port, where large varieties of raw materials and finished products are handled, expected sediment contamination is obvious.

The materials or part of materials spilled over the water during loading and unloading operations lead to the deposition in the harbour water along with sediment and thus collected as harbour sediment sample. These materials, serve as receptor of many trace elements, which are prone to environment impact. In this connection it is pertinent to study the concentration and distribution of environmentally sensitive elements in the harbour sediment. However, human activities result in accumulation of toxic substances such as heavy metals in marine sediments. Heavy metals are well-known environmental pollutants due to their toxicity, persistence in the environment, and bioaccumulation. Metals affect the ecosystem because they are not removed from water by self-purification, but accumulate in sediments and enter the food chain.

Methodology

As defined in the scope by DPA, the Marine Sediment sampling is required to be carried out once in a month at total eight locations, i.e., six at Kandla and two at Vadinar. The sampling of the Marine Sediment is carried out using the Van Veen Grab Sampler (make Holy Scientific Instruments Pvt. Ltd). The Van Veen Grab sampler is an instrument to sample (disturbed) sediment up to a depth of 20-30 cm into the sea bed. While letting the instrument down on the seafloor, sediment can be extracted. The details of locations of Marine Sediment to be monitored under the study are mentioned in **Table 32** as follows:

Table 32: Details of the sampling locations for Marine Sediment

Sr. No	Location Code	Location Name	Latitude Longitude
1.	Kandla	MS-1	23.017729N 70.224306E
2.		MS-2	23.001313N 70.226263E
3.		MS-3	22.987752N 70.227923E
4.		MS-4	22.977544N 70.207831E
5.		MS-5	22.962588N 70.116863E
6.		MS-6	23.033113N 70.158528E
7.	Vadinar	MS-7	22.500391N 69.688089E
8.		MS-8	22.440538N 69.667941E

The map depicting the locations of Marine Sediment sampling at Kandla and Vadinar have been mentioned in **Map 18 and 19** as follows:



Map 18: Location of Marine Sediment Monitoring at Kandla



Map 19: Locations of Marine Sediment Monitoring at Vadinar

The list of parameters to be monitored under the projects for the Marine Sediment sampling been mentioned in **Table 33** as follows:

Table 33: List of parameters to be monitored for Sediments at Kandla and Vadinar

Sr. No.	Parameters	Units	Reference method	Instruments
1.	Texture		Methods Manual Soil Testing in India January 2011,01	Hydrometer
2.	Organic Matter	%	Methods Manual Soil Testing in India January, 2011, 09. Volumetric method (Walkley and Black, 1934)	Titration apparatus
3.	Inorganic Phosphates	mg/Kg	Practical Manual Chemical Analysis of Soil and Plant Samples, ICAR-Indian Institute of Pulses Research 2017	UV- Visible Spectrophotometer
4.	Silica	mg/Kg	EPA METHOD 6010 C & IS: 3025 (Part 35) - 1888, part B	
5.	Phosphate	mg/Kg	EPA Method 365.1	
6.	Sulphate as SO ₄ ²⁻	mg/Kg	IS: 2720 (Part 27) - 1977	
7.	Nitrite	mg/Kg	ISO 14256:2005	
8.	Nitrate	mg/Kg	Methods Manual Soil Testing in India January, 2011, 12	Titration Apparatus
9.	Calcium as Ca	mg/Kg	Methods Manual Soil Testing in India January 2011, 16.	
10.	Magnesium as Mg	mg/Kg	Method Manual Soil Testing in India January 2011	
11.	Sodium	mg/Kg	EPA Method 3051A	Flame Photometer
12.	Potassium	mg/Kg	Methods Manual Soil Testing in India January, 2011	
13.	Aluminium	mg/Kg	EPA Method 3051A	ICP-OES
14.	Chromium	mg/Kg		
15.	Nickel	mg/Kg		
16.	Zinc	mg/Kg		
17.	Cadmium	mg/Kg		
18.	Lead	mg/Kg		
19.	Arsenic	mg/Kg		
20.	Mercury	mg/Kg		

11.2 Result and Discussion

The quality of Marine Sediment samples collected from the locations of Kandla and Vadinar during the monitoring period has been summarized in the **Table 34**.

Table 34: Summarized result of Marine Sediment Quality

Sr No.	Parameters	Unit	Kandla						Vadinar	
			MS-1	MS-2	MS-3	MS-4	MS-5	MS-6	MS-7	MS-8
1.	Inorganic Phosphate	kg/ ha	1.12	4.62	2.36	1.52	1.02	0.96	0.82	0.56
2.	Phosphate	mg/Kg	362.21	522.31	426.31	316.24	222.31	212.23	396.25	301.45
3.	Organic Matter	%	1.21	1.56	1.42	1.02	1.40	1.18	1.55	1.82
4.	Sulphate as SO ₄ ²⁻	mg/Kg	296.43	112.43	120.13	90.34	101.43	95.34	128.66	138.21
5.	Calcium as Ca	mg/Kg	4000.00	1900.00	2500.00	1500.00	2000.00	1600.00	2500.00	1800.00
6.	Magnesium as Mg	mg/Kg	812.00	955.00	1450.00	721.00	1012.00	850.00	956.00	1125.00
7.	Silica	g/Kg	402.31	333.21	182.43	320.13	309.47	412.43	196.32	250.24
8.	Nitrite	mg/Kg	1.2	1.1	1.21	1.05	1.02	1.09	0.52	0.31
9.	Nitrate	mg/Kg	5.84	5.31	4.21	5.36	6.12	5.98	16.25	10.58
10.	Sodium	mg/Kg	2851	2316	2746	2164	2946	3526	7458	8569
11.	Potassium	mg/Kg	1924	1854	1955	2201	2415	2954	1524	2958
12.	Copper	mg/Kg	40.21	43.28	46.36	35.26	41.6	30.29	18.54	23.12
13.	Aluminium	mg/Kg	34287.4	36245	38645.1	26431.2	35246.5	30258.6	15236.2	26158.4
14.	Chromium	mg/Kg	70.46	76.43	72.16	73.54	65.13	56.43	36.58	40.25
15.	Nickel	mg/Kg	30.21	26.35	25.42	23.65	31.27	22.51	21.36	32.59
16.	Zinc	mg/Kg	103.63	185.24	156.27	112.25	90.22	81.26	19.22	40.32
17.	Cadmium	mg/Kg	BQL	BQL	BQL	0.62	BQL	BQL	0.09	BQL
18.	Lead	mg/Kg	7.65	11.23	20.65	14.25	10.61	7.25	4.21	9.25
19.	Arsenic	mg/Kg	5.32	4.21	7.25	8.26	5.29	4.21	2.91	4.17
20.	Mercury	mg/Kg	BQL	BQL	BQL	BQL	BQL	BQL	BQL	BQL
21.	Texture	-	Silt Loam	Sandy Loam	Silt Loam	Loam	Silt Loam	Silt Loam	Sandy Loam	Loam

11.3 Data Interpretation and Conclusion

The Marine sediment quality at Kandla and Vadinar has been monitored for various physico-chemical parameters during the monitoring 2024. The detailed interpretation of the parameters is given below:

- **Inorganic Phosphate** for the sampling period was observed in range of **0.96 to 4.62 Kg/ha** for Kandla. Whereas for Vadinar the value observed at location MS-7 (Nakti creek) is 0.82 Kg/ha and MS-8 (Near Vadinar Jetty) is 0.56 Kg/ha. For Kandla and Vadinar the average value of Inorganic Phosphate was observed 1.93 and 0.69 Kg/ha respectively.
- The concentration of **Phosphate** was observed in range of **212.23 to 522.31 mg/Kg** for Kandla and for Vadinar the value observed at location MS-7 (Nakti creek) as 396.25 mg/Kg and MS-8 (Near Vadinar Jetty) as 301.45 mg/Kg. For Kandla and Vadinar the average concentration of Phosphate was observed 343.60 and 348.85 mg/Kg respectively.

- The **Organic Matter** for the sampling period was observed in the range of **1.02 to 1.56%** for Kandla with the average value of 1.30% and for Vadinar the value recorded at location MS-7 and MS-8 was observed 1.55% & 1.82% respectively, with average concentration as 1.69 %.
- The concentration of **Sulphate** was observed in the range of **90.34 to 296.43 mg/Kg** for Kandla and for Vadinar the value observed at MS-7 is 128.66 mg/Kg and at MS-8 is 138.21 mg/Kg. For Kandla and Vadinar the average value of Sulphate was observed 136.02 and 133.44 mg/Kg respectively.
- The value of **Calcium** was observed in the range of **1500 to 4000 mg/Kg** for Kandla and for Vadinar the value observed at MS-7 is 2500 mg/Kg and at MS-8, is 1800 mg/Kg. The average value of Calcium for the monitoring period was observed 2250.00 mg/Kg and 2150 mg/Kg at Kandla and Vadinar, respectively.
- The value of **Magnesium** for the sampling period was observed in the range of **721 to 1450 mg/Kg** for Kandla and for Vadinar the value observed at MS-7 is 956 mg/Kg and at MS-8, is 1125 mg/Kg. For Kandla and Vadinar the average value of Magnesium was observed 966.67 mg/Kg and 1040.50 mg/Kg respectively.
- For the sampling period **Silica** was observed in the range of **182.43 to 412.23 mg/Kg** for Kandla with average value 326.66 mg/Kg and for Vadinar the value observed to be 196.32 and 250.24 mg/Kg at MS-7 and MS-8, respectively with average 223.28 mg/Kg.
- The value of **Nitrate** was observed in the range of **4.21 to 6.12 mg/Kg** for Kandla with average value 5.47 mg/Kg and for Vadinar the value observed to be 16.25 and 10.58 mg/Kg at MS-7 and MS-8, respectively with average 13.42 mg/Kg.
- The value of **Nitrite** was observed in the range of **1.02 to 1.21 mg/Kg** for Kandla with average value 1.11 mg/Kg and for Vadinar the value observed to be 0.52 and 0.31 mg/Kg at MS-7 and MS-8, respectively with average 0.42 mg/Kg.
- The value of **Sodium** was observed in the range of **2164 to 3526 mg/Kg** for Kandla with average value 2758.17 mg/Kg and for Vadinar the value observed to be 7458 and 8569 mg/Kg at MS-7 and MS-8, respectively with average 8013.50 mg/Kg.
- The value of **Potassium** was observed in the range of **1854 to 2954 mg/Kg** for Kandla with average value 2217.17 mg/Kg and for Vadinar the value observed to be 1542 and 2958 mg/Kg at MS-7 and MS-8, respectively with average 2241 mg/Kg.
- The value of **Aluminium**, was observed in the range of **26431.2 to 38645.1 mg/Kg** for Kandla with average value 33518.97 mg/Kg and for Vadinar the value observed to be 15236.2 and 26158.4 mg/Kg at MS-7 and MS-8, respectively with average 20697.30 mg/Kg.
- The value of **Mercury** was observed “Below the Quantification Limit” at all the eight-monitoring location of Kandla and Vadinar.
- Texture was observed to be “**Sandy Loam**” and “**Slit Loam**” at location MS-1, MS-2, MS-3, MS-4, MS-5, MS-6 in Kandla. “**Sandy Loam**” at location MS-7 & “**loam**” at location MS-8 in Vadinar during sampling period.

Heavy Metals

The sediment quality of Kandla and Vadinar has been compared with respect to the Average Standard guideline applicable for heavy metals in marine sediment specified by EPA have been mentioned in **Table 35**.

Table 35: Standard Guidelines applicable for heavy metals in sediments

Sr. No.	Metals	Sediment quality (mg/kg)			Source
		Not polluted	Moderately polluted	Heavily polluted	
1.	As	<3	3-8	>8	EPA
2.	Cu	<25	25-50	>50	
3.	Cr	<25	25-75	>75	
4.	Ni	<20	20-50	>50	
5.	Pb	<40	40-60	>60	
6.	Zn	<90	90-200	>200	
7.	Cd	-	<6	>6	
ND = Not Detected					

(Source: G Perin et al. 1997)

Table 36: Comparison of Heavy metals with Standard value in Marine Sediment

Sr. No.	Parameters	Unit	Kandla						Vadinar	
			MS-1	MS-2	MS-3	MS-4	MS-5	MS-6	MS-7	MS-8
1.	Arsenic	mg/Kg	5.32	4.21	7.25	8.26	5.29	4.21	2.91	4.17
2.	Copper	mg/Kg	40.21	43.28	46.36	35.26	41.6	30.29	18.54	23.12
3.	Chromium	mg/Kg	70.46	76.43	72.16	73.54	65.13	56.43	36.58	40.25
4.	Nickel	mg/Kg	30.21	26.35	25.42	23.65	31.27	22.51	21.36	32.59
5.	Lead	mg/Kg	7.65	11.23	20.65	14.25	10.61	7.25	4.21	9.25
6.	Zinc	mg/Kg	103.63	185.24	156.27	112.25	90.22	81.26	19.22	40.32
7.	Cadmium	mg/Kg	BQL	BQL	BQL	0.62	BQL	BQL	0.09	BQL

- Arsenic** was observed in the range of **4.21 to 8.26 mg/Kg** for Kandla with average value 5.76 mg/Kg and for Vadinar the value observed to be 2.91 and 4.17 mg/Kg at MS-7 and MS-8, respectively with average 3.54 mg/Kg. With reference to the guidelines mentioned in table 35, the sediment quality with respect to arsenic falls in moderately polluted class.
- Copper** was observed in the range of **30.29 to 46.36 mg/Kg** for Kandla with average value 39.50 mg/Kg and for Vadinar the value observed to be 18.54 and 23.12 mg/Kg at MS-7 and MS-8, respectively with average 20.83 mg/Kg. With reference to the guidelines mentioned in table 35, the sediment quality with respect to copper falls in Moderately polluted class.
- Chromium** was observed in the range of **56.43 to 76.43 mg/Kg** for Kandla with average Value 69.03 mg/Kg and for Vadinar the value observed to be 36.58 and 40.25 mg/Kg at MS-7 and MS-8, respectively with average 38.42 mg/Kg. With reference to the guidelines mentioned in table 35, the sediment quality with respect to chromium falls under moderately polluted class.

- **Nickel** was observed in the range of **22.51 to 31.27 mg/Kg** for Kandla with average value 26.57 mg/Kg and for Vadinar the value observed to be 21.36 and 32.59 mg/Kg at MS-7 and MS-8, respectively with average 26.98 mg/Kg. With reference to the guidelines mentioned in table 35, the sediment quality with respect to nickel falls in moderately polluted class.
- **Lead** was observed in the range of **7.25 to 20.65 mg/Kg** for Kandla with average value 11.94 mg/Kg and for Vadinar the value observed to be 4.21 and 9.25 mg/Kg at MS-7 and MS-8, respectively with average 6.73 mg/Kg. With reference to the guidelines mentioned in table 35, the sediment quality with respect to lead falls in Not polluted class.
- **Zinc** was observed in the range of **81.26 to 185.24 mg/Kg** for Kandla with average value 121.48 mg/Kg and for Vadinar the value observed to be 19.22 and 40.32 mg/Kg at MS-7 and MS-8, respectively with average 29.77 mg/Kg. With reference to the guidelines mentioned in table 35, the sediment quality with respect to zinc falls in moderately polluted class
- **Cadmium** was observed BQL for all locations at Kandla and Vadinar except MS-7 during sampling period. With reference to the guidelines mentioned in table 35, the sediment quality with respect to cadmium falls in non-polluted class.

Analysis of the sediments indicates moderate pollution. However, it may be noted that, the sediments are highly dynamic being constantly deposited and carried away by water currents. Hence maintaining the quality of sediments is necessary as it plays a significant role in regulating the quality of the marine water and the marine ecology.

The presence of anthropic activity in the coastal areas has an effect upon the marine water and sediment. One of the primary risks associated with contaminated sediments is bioaccumulation in benthic organisms, which is a route of entry into the food chain. Generally adopted sediment remediation approaches include dredging, capping of contaminated areas, and monitored natural recovery (MNR). Dredging can remove contaminated sediments, but it requires large areas of land for sediment disposal. It is expensive and may cause secondary contamination of the water column during re-suspension. MNR relies on ongoing naturally occurring processes to decrease the bioavailability or toxicity of contaminants in sediment. These processes may include physical, biological, and chemical mechanisms that act together to reduce the environmental risks posed by contaminated sediments. MNR require longer monitoring time and can be even more expensive than for dredging and capping. Capping consists of in situ covering of clean or suitable isolating material over contaminated sediments layer to limit leaching of contaminants, and to minimize their re-suspension and transport. Hence appropriate remedial measures for the polluted sediment sites may be implemented, to reduce the concentration of the heavy metals.



CHAPTER 12: MARINE ECOLOGY MONITORING

12.1 Marine Ecological Monitoring

The monitoring of the biological and ecological parameters is important in order to assess the marine environment. A marine sampling is an estimation of the body of information in the population. The theory of the sampling design is depending upon the underlying frequency distribution of the population of interest. The requirement for useful water sampling is to collect a representative sample of suitable volume from the specified depth and retain it free from contamination during retrieval. Deendayal Port and its surroundings have mangroves, mudflats and creek systems as major ecological entities. As defined in the scope by DPA, the Marine Ecological Monitoring is required to be carried out once a month specifically at eight locations, six at Kandla and two at Vadinar. The sampling of the Benthic Invertebrates has been carried out with the help of D-frame nets, whereas the sampling of zooplankton and phytoplankton has been carried out with the help of Plankton Nets (60 micron and 20 micron). The details of the locations of Marine Ecological Monitoring have been mentioned in **Table 37** as follows:

Table 37: Details of the sampling locations for Marine Ecological

Sr. No.	Location Code	Location Name	Latitude Longitude
1.	Kandla	ME-1	23.017729N 70.224306E
2.		ME-2	23.001313N 70.226263E
3.		ME-3	22.987752N 70.227923E
4.		ME-4	22.977544N 70.207831E
5.		ME-5	22.962588N 70.116863E
6.		ME-6	23.033113N 70.158528E
7.	Vadinar	ME-7	22.500391N 69.688089E
8.		ME-8	22.440538N 69.667941E

The map depicting the locations of Marine Ecological monitoring in Kandla and Vadinar have been mentioned in **Map 20 and 21** as follows:



Map 20: Locations of Marine Ecological Monitoring at Kandla



Map 21: Locations of Marine Ecological Monitoring at Vadinar

The various parameters to be monitored under the study for Marine Ecological Monitoring are mentioned in **Table 38** as follows:

Table 38: List of parameters to be monitored for Marine Ecological Monitoring

Sr. No.	Parameters
1.	Productivity (Net and Gross)
2.	Chlorophyll-a
3.	Pheophytin
4.	Biomass
5.	Relative Abundance, species composition and diversity of phytoplankton
6.	Relative Abundance, species composition and diversity of zooplankton
7.	Relative Abundance, species composition and diversity of benthic invertebrates (Meio, Micro and macro benthos)
8.	Particulate Oxidisable Organic Carbon
9.	Secchi Depth

Methodology

- **Processing for chlorophyll estimation:**

Samples for chlorophyll estimation were preserved in ice box on board in darkness to avoid degradation in opaque container covered with aluminium foil. Immediately after reaching the shore after sampling, 1 litre of collected water sample was filtered through GF/F filters (pore size 0.45 μm) by using vacuum filtration assembly. After vacuum filtration the glass micro fiber filter paper was grunted in tissue grinder, macerating of glass fiber filter paper along with the filtrate was done in 90% aqueous Acetone in the glass tissue grinder with glass grinding tube. Glass fiber filter paper will assist breaking the cell during grinding and chlorophyll content was extracted with 10 ml of 90% Acetone, under cold dark conditions along with saturated magnesium carbonate solution in glass screw cap tubes. After an extraction period of 24 hours, the samples were transferred to calibrated centrifuge tubes and adjusted the volume to original volume with 90% aqueous acetone solution to make up the evaporation loss. The extract was clarified by using centrifuge in closed tubes. The clarified extracts were then decanted in clean cuvette and optical density was observed at wavelength 664, 665 nm.

- **Phytoplankton Estimation**

Phytoplankton are free floating unicellular, filamentous and colonial eutrophic organisms that grow in aquatic environments whose movement is more or less dependent upon water currents. These micro flora acts as primary producers as well as the basis of food chain, source of protein, bio-purifier and bio-indicators of the aquatic ecosystems of which diverse array of the life depends. They are considered as an important component of aquatic flora, play a key role in maintaining equilibrium between abiotic and biotic components of aquatic ecosystem. The phytoplankton includes a wide range of photosynthetic and phototrophic organisms. Marine

phytoplankton is mostly microscopic and unicellular floating flora, which are the primary producers that support the pelagic food-chain. The two most prominent groups of phytoplankton are Diatoms (*Bacillariophyceae*) and Dinoflagellates (*Dinophyceae*). Phytoplankton also include numerous and diverse collection of extremely small, motile algae which are termed micro flagellates (naked flagellates) as well as Cyanophytes (Bluegreen algae). Algae are an ecologically important group in most aquatic ecosystems and have been an important component of biological monitoring programs. Algae are ideally suited for water quality assessment because they have rapid reproduction rates and very short life cycles, making them valuable indicators of short-term impacts. Aquatic populations are impacted by anthropogenic stress, resulting in a variety of alterations in the biological integrity of aquatic systems. Algae can serve as an indicator of the degree of deterioration of water quality, and many algal indicators have been used to assess environmental status.

- **Zooplankton Estimation**

Zooplankton includes a taxonomically and morphologically diverse community of heterotrophic organisms that drift in the waters of the world's oceans. Qualitative and quantitative studies on zooplankton community are a prerequisite to delineate the ecological processes active in the marine ecosystem. Zooplankton community plays a pivotal role in the pelagic food web as the primary consumers of phytoplankton and act as the food source for organisms in the higher trophic levels, particularly the economically essential groups such as fish larvae and fishes. They also function in the cycling of elements in the marine ecosystem. The dynamics of the zooplankton community, their reproduction, and growth and survival rate are all significant factors determining the recruitment and abundance of fish stocks as they form an essential food for larval, juvenile and adult fishes. Through grazing in surface waters and following the production of sinking faecal matters and also by the active transportation of dissolved and particulate matter to deeper waters via vertical migration, they help in the transport of organic carbon to deep ocean layers and thus act as key drivers of 'biological pump' in the marine ecosystem. Zooplankton grazing and metabolism also, transform particulate organic matter into dissolved forms, promoting primary producer community, microbial demineralization, and particle export to the ocean's interior. The categorisation of zooplankton into various ecological groups is based on several factors such as duration of planktonic life, size, food preferences and habitat. As they vary significantly in size from microscopic to metazoic forms, the classification of zooplankton based on size has paramount importance in the field of quantitative plankton research.

- **Benthic Organisms Estimation**

Benthic macroinvertebrates are small aquatic animals and the aquatic larval stages of insects. They include dragonfly and stonefly larvae, snails, worms, and beetles. Use of benthic macroinvertebrates has been in vogue as indicator organisms for water quality monitoring since long. Traditional methods of water quality monitoring incorporates mostly monitoring of physicochemical parameters. Benthic macroinvertebrates are

majorly insects that dwell on the floor of water bodies. They are found in all water bodies, as they have a wide range of pollution tolerance among various species. The benthic macro-invertebrate's community structure depends on the exposure to pollution it receives. Benthic macroinvertebrates have been used as indicator organisms to measure the water quality of water bodies across the world. Evaluating the abundance and variety of benthic macroinvertebrates in a waterbody gives us an indication of the biological condition of that waterbody. Generally, waterbodies in healthy biological condition support a wide variety and high number of macroinvertebrate taxa, including many that are intolerant of pollution. Samples yielding only pollution-tolerant species or very little diversity or abundance may indicate a less healthy waterbody. Biological condition is the most comprehensive indicator of waterbody health. When the biology of a waterbody is healthy, the chemical and physical components of the waterbody are also typically in good condition.

- **Diversity Index**

A diversity index is a measure of species diversity within a community that consists of co-occurring populations of several (two or more) different species. It includes two components: richness and evenness. Richness is the measure of the number of different species within a sample showing that more the types of species in a community, the higher is the diversity or greater is the richness. Evenness is the measure of relative abundance of the different species within a community.

1. **Shannon-Wiener's index:**

An index of diversity commonly used in plankton community analyses is the Shannon-Wiener's index (H), which emphasizes not only the number of species (richness or variety), but also the apportionment of the numbers of individuals among the species. Shannon-Wiener's index (H) reproduces community parameters to a single number by using an equation as follows:

$$H' = \sum p_i * \ln (p_i)$$

Where, \sum = Summation symbol,

p_i = Relative abundance of the species,

\ln = Natural logarithm

More diverse ecosystems are considered healthier and more resilient. Higher diversity ecosystems typically exhibit better stability and greater tolerance to fluctuations. e.g., The Shannon diversity index values between 2.19 and 2.56 indicate relatively high diversity within the community compared to communities with lower values. It suggests that the community likely consists of a variety of species, and the species are distributed somewhat evenly in terms of their abundance.

2. **Simpson's index:**

A reasonably high level of dominance by one or a small number of species is indicated by the range of **0.89 to 0.91**. The general health and stability of the ecosystem may be

impacted by this dominance. Community disturbances or modifications that affect the dominant species may be more likely to have an impact. The dominating species determined by the Simpson's index can have big consequences on how the community is organised and how ecological interactions take place.

The formula for calculating D is presented as:

$$D = 1 - \sum (p_i)^2$$

Where, \sum = Summation symbol, p_i = Relative abundance of the species

3. Margalef's diversity index:

The number of species is significantly related to the port's vegetation cover surface, depth, and photosynthetic zone. The habitat heterogeneity is a result of these three elements. Species richness is related to the number of distinct species present in the analysed area. Margalef's index has a lower correlation with sample size. Small species losses in the community over time are likely to result in inconsistent changes.

Margalef's index D_{Mg} , which is also a measure of species richness and is based on the presumed linear relation between the number of species and the logarithm of the number of individuals. It is given by the formula:

$$D_{Mg} = \frac{S-1}{\ln N}$$

Where, N = total number of individuals collected

S = No. of taxa or species or genera

4. Berger-Parker index:

This is a useful tool for tracking the biodiversity of deteriorated ecosystems. Environmental factors have a considerable impact on this index, which accounts for the dominance of the most abundant species over the total abundance of all species in the assemblage. The preservation of their biodiversity and the identification of the fundamental elements influencing community patterns are thus critical for management and conservation. Successful colonising species will dominate the assemblage, causing the Berger-Parker index to rise, corresponding to well-documented successional processes. The environmental and ecological features of the system after disturbance may therefore simply but significantly determine the identity of the opportunistic and colonising species through niche selection processes.

The Berger-Parker index is a biodiversity metric that focuses on the dominance or relative abundance of a single species within a community. It provides a measure of the most abundant species compared to the total abundance of all species present in the community. Mathematically, it can be represented as follows:

$$d = \frac{N_{max}}{\sum N_i}$$

Where, N_{max} = Max no of individuals of particular genera or species

$\sum N_i$ = Total no of individuals obtained.

The resulting value of the Berger-Parker index ranges between 0 and 1. A higher index value indicates a greater dominance of a single species within the community. Conversely, a lower index value suggests a more even distribution of abundance among different species, indicating higher species diversity. The range of the Berger-Parker index can be interpreted as when the index value is close to 0, it signifies a high diversity with a more even distribution of abundances among different species. In such cases, no single species dominates the community, and there is a balanced representation of various species.

5. Evenness index-

Evenness index determines the homogeneity (and heterogeneity) of the species' abundance. Intermediate values between 0 and 1 represent varying degrees of evenness or unevenness in the distribution of individuals among species. Value of species evenness represents the degree of redundancy and resilience in an ecosystem. High species evenness = All species of a community can perform similar ecological activities or functions= even utilization of available ecological niches = food web more stable = ecosystem is robust (resistant to disturbances or environmental changes). Intermediate values between 0 and 1 represent variable degrees of evenness or unevenness.

$$EI = \frac{H}{\ln(S)}$$

Where, H= Shannon value

$\ln(S)$ = the natural logarithm of the number of different species in the community

Relative Abundance: The species abundance distribution (SAD) from disturbed ecosystems follows even/ uneven pattern. E.g., If relative abundance is 0.15, then the found species are neither highly dominant nor rare.

$$RA = \frac{\text{No. of Individuals of Sp.}}{\text{Total no. of Individual}} * 100\%$$

The basic idea of index is to obtain a quantitative estimate of biological variability that can be used to compare biological entities composed of discrete components in space and time. Biodiversity is commonly expressed through indices based on species richness and species abundances. Biodiversity indices are a non-parametric tool used to describe the relationship between species number and abundance. The most widely used bio diversity indices are Shannon Weiner index and Simpson's index.

12.2 Result and Discussion

The details of Marine Ecological Monitoring conducted for the locations of Kandla and Vadinar during the monitoring period has been summarized in the **Table 39**.

Table 39: Values of Biomass, Net Primary Productivity (NPP), Gross Primary Productivity (GPP), Pheophytin and Chlorophyll for Kandla and Vadinar

Sr. No.	Parameters	Unit	Kandla						Vadinar	
			ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
1.	Biomass	mg/L	212	96	62	135	62	105	95	121
2.	Net Primary Productivity	mg/L/hr	BQL	0.52	BQL	BQL	0.31	BQL	BQL	BQL
3.	Gross Primary Productivity	mg/L/hr	0.25	0.33	0.96	1.23	1.35	0.42	0.75	1.01
4.	Pheophytin	mg/m ³	BQL	1.22	0.82	1.32	1.1	0.55	1.12	1.28
5.	Chlorophyll-a	mg/m ³	3.21	1.22	1.38	1.16	1.2	1.14	1.5	1.65
6.	Particulate Oxidisable Organic Carbon	mg/L	1.53	1.32	0.39	0.8	1.12	0.95	0.62	0.81
7.	Secchi Depth	ft	0.75	0.65	0.42	0.82	0.96	0.72	1.28	1.35

- Biomass:**

With reference to the **Table 39**, the concentration of **Biomass** reported from location ME-1 to ME-6 in range between **62 to 212 mg/L** where lowest biomass presents in ME-3 (Near Coal Berth) and highest biomass present in ME-1 (Near Passenger Jetty One) during sampling period. In Vadinar, the value of biomass was observed **95 mg/L** at ME-7 (Near SPM) and **121 mg/L** in ME-8 (Near Vadinar Jetty) monitoring station.

- Productivity (Net and Gross)**

Gross primary productivity (GPP) is the rate at which organic matter is synthesised by producers per unit area and time (GPP). The amount of carbon fixed during photosynthesis by all producers in an ecosystem is referred to as gross primary productivity. The monitoring location of Kandla reported GPP value in range between 0.25 to 1.35 mg/L/ Hr where the highest value recorded for ME-5 and lowest recorded at ME-1 (Near Passenger Jetty One). In Vadinar, the value of GPP was observed 0.7 at ME-7 (Near SPM) and 1.01 at ME-8 (Near Vadinar Jetty) monitoring station.

Net primary productivity, is the amount of fixed carbon that is not consumed by plants, and it is this remaining fixed carbon that is made available to various consumers in the ecosystem. The Net primary productivity of the monitoring location at Kandla from (ME-1 to ME-6) has been recorded in as **BQL (Below Quantification Limit)** except ME-2 and ME-5. While in Vadinar, the value of **NPP** was observed **BQL (Below Quantification Limit)**. at ME-7 (Near SPM) and ME-8 (Near Vadinar Jetty) monitoring station.

- Pheophytin**

The level of Pheophytin was detected in the range from **0.55 to 1.32 mg/m³** where the highest value observed at ME-4 (Khori Creek) and the lowest value observed at ME-1 (Near Passenger Jetty One). While in Vadinar, the value of Pheophytin was observed 1.12 mg/m³ at ME-7 and **1.28 mg/m³** at ME-8 monitoring station.

- **Chlorophyll-a**

In the sub surface water, the value of Chlorophyll-a reported in range from **1.14 to 3.21 mg/m³**. The highest value observed at ME-1 (Near Passenger Jetty One) while the lowest value observed at ME-6 (Nakti Creek (near NH - 8A)). In Vadinar, the value of chlorophyll-a was observed **1.50 mg/m³** at ME-7 (Near SPM) and **1.65 mg/m³** in ME-8 (Near Vadinar Jetty) monitoring station.

- **Particulate Oxidisable Organic Carbon**

During the sampling period, the particulate oxidisable organic carbon falls within the range of **0.39 to 1.53 mg/L** from monitoring location ME-1 to ME-6 at Kandla, whereas for Vadinar, the value of POC observed **0.62 mg/L** at ME-7 (Near SPM) and **0.81 mg/L** in ME-8 (Near Vadinar Jetty) monitoring station.

- **Secchi Depth**

In monitoring station of Kandla (ME-1 to ME-6) the level of Secchi Depth was observed between **0.42 to 0.96 ft** whereas at Vadinar, the value recorded at ME-7 i.e. Near SPM is **1.28 ft** and in Near Vadinar Jetty is **1.35 ft**.

Ecological Diversity

Phytoplankton: For the evaluation of the Phytoplankton population in DPA Kandla and Vadinar within the immediate surroundings of the port, sampling was conducted during the study period. Total 8 sampling locations were studied i.e. sampling locations (6 from Kandla and two from Vadinar).

The details of variation in abundance and diversity in phytoplankton communities are mentioned in **Table 40**.

Table 40: Phytoplankton variations in abundance and diversity in sub surface sampling stations

Genera	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
<i>Bacillaria</i> sp.	252	-	136	390	290	-	236	145
<i>Biddulphia</i> sp.	-	-	241	121	-	150	-	216
<i>Chaetoceros</i> sp.	145	172	-	-	-	98	210	-
<i>Chlamydomonas</i> sp.	162	-	255	-	-	-	-	187
<i>Cyclotella</i> sp.	147	303	-	-	-	216	-	-
<i>Coscinodiscus</i> sp.	-	165	-	125	100	-	-	-
<i>Ditylum</i> sp	-	-	-	-	190	-	241	-
<i>Fragilaria</i> sp.	-	-	139	-	159	-	-	-
<i>Bacteriastrum</i> sp.	185	-	-	157	142	-	-	256
<i>Pleurosigma</i> sp.	-	265	145	-	-	256	-	-
<i>Navicula</i> sp.	-	-	-	240	-	-	-	230
<i>Merismopedia</i> sp.	192	-	201	-	-	-	125	-
<i>Synedra</i> sp.	-	280	-	189	-	231	153	215
<i>Skeletonema</i> sp.	-	-	-	-	-	-	-	-
<i>Oscillatoria</i> sp.	161	-	-	-	210	156	-	-
<i>Thalassiosira</i>	-	-	-	-	-	-	-	-
<i>Gomphonema</i> sp.	-	116	-	122	-	112	255	-
Density-Units/L	1244	1301	1117	1344	1091	1219	1220	1249
No. of genera	7	6	6	7	6	7	6	6

The phytoplankton community of the sub surface water in the Kandla and Vadinar was represented by, Diatoms, green algae and filamentous Cynobacteria. Diatoms were represented by 14 genera; green algae were represented by 1 genera and filamentous Cynobacteria were represented by 2 genera during the sampling period.

The density of phytoplankton of the sampling stations from ME-1 to ME-6 (Kandla) varying from **1091 to 1301 units/L**, while for Vadinar its density of phytoplankton observed **1220 units/L at ME-7 and 1249 units/L at ME-8**. During the sampling, phytoplankton communities were dominated, *Bacillaria* sp., *Coscinodiscus* sp., *Cyclotella* sp., *Gomphonema* sp. in Kandla, while *Bacillaria* sp., *Synedra* sp., *Navicula* sp. in Vadinar.

The details of Species richness Index and Diversity Index in Phytoplankton are mentioned in **Table 41**.

Table 41: Species richness Index and Diversity Index in Phytoplankton

Indices	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
Taxa S	7	6	6	7	6	7	6	6
Individuals	1244	1301	1117	1344	1091	1219	1220	1249
Shannon diversity	1.66	1.77	1.67	1.91	1.64	1.87	1.22	1.18
Simpson 1-D	0.85	0.82	0.82	0.83	0.82	0.84	0.82	0.83
Species Evenness	0.85	0.99	0.93	0.98	0.92	0.96	0.68	0.66
Margalef richness	0.84	0.70	0.71	0.83	0.71	0.84	0.70	0.70
Berger-Parker	0.20	0.23	0.23	0.29	0.27	0.21	0.21	0.20
Relative abundance	0.56	0.46	0.54	0.52	0.55	0.57	0.49	0.48

- **Shannon- Wiener's Index (H)** of phytoplankton communities was in the range of **1.64 to 1.91** between selected sampling stations from ME-1 to ME-6 with an average value of **1.75** at Kandla creek and its nearby creeks. While for Vadinar, Shannon Wiener's index of phytoplankton communities recorded to be **1.22** at location ME-7 and **1.18** at ME-8 with an average value of **1.20**. The apportionment of the numbers of individuals among the species observed higher stability at all monitoring location of Kandla.
- **Simpson diversity index (1-D)** of phytoplankton communities was ranged between **0.82 to 0.85** at all sampling stations in the Kandla creek and nearby creeks, with an average of **0.83** Similarly, for Vadinar Simpson diversity index (1-D) of phytoplankton communities was **0.82** at location ME-7 and **0.83** at ME-8 with an average of **0.83**.
- **Margalef's diversity index** (Species Richness) of phytoplankton communities in Kandla and nearby creeks sampling stations was varying from **0.70 to 0.84** with an average of **0.77** during the sampling period. While for Vadinar, Margalef's diversity index (Species Richness) of phytoplankton communities observed **0.70** at ME-7 and **0.70** at ME-8 with an average value of **0.70**
- **Berger-Parker Index (d)** of phytoplankton communities was in the range of **0.20 to 0.29** between selected sampling stations from ME-1 to ME-6 with an average value of **0.24** at Kandla creek and nearby creeks. Berger-Parker Index (d) of phytoplankton communities in the sampling stations of Vadinar, was in the range of **0.20 to 0.21** with an average value of **0.21**. All the monitoring station signifies a low diversity with an even distribution among the different species.
- The **Species Evenness** is observed in the range of **0.85 to 0.99** for all the six-monitoring station of Kandla and for the Vadinar the species evenness is observed **0.68** at location ME-7 & **0.66** at ME-8 location.
- During the sampling period, **Relative Abundance** of phytoplankton communities was in range of **0.46 to 0.57** between selected sampling stations from ME-1 to ME-6 with an average value of **0.53** at Kandla creek and nearby creeks. Whereas for Vadinar the Index

value **0.49** at ME-7 and **0.48** at ME-8 with an average value **0.49**, thus it is concluded that the studied species can be stated as neither highly dominant nor rare.

The details of variation in abundance and diversity in zooplankton communities are mentioned in **Table 42**.

Table 42: Zooplankton variations in abundance and diversity in sub surface sampling stations

Genera	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
<i>Acartia sp.</i>	1	2	1	-	1	-	-	1
<i>Acrocalanus</i>	2	-	-	1	-	1	1	-
<i>Amoeba</i>	-	1	1	-	-	1	2	2
<i>Brachionus sp.</i>	2	-	-	-	1	-	-	-
<i>Calanus sp.</i>	1	-	-	1	1	2	-	1
<i>Cladocera sp.</i>	-	2	2	2	1	-	1	1
<i>Cyclopoid sp.</i>	-	-	1	-	-	-	-	1
<i>Copepod larvae</i>	1	1	-	-	-	2	1	-
<i>Diaptomus sp.</i>	-	1	2	-	2	1	1	-
<i>Eucalanus sp.</i>	1	-	-	1	1	-	-	-
<i>Mysis sp.</i>	-	-	1	1	1	-	1	-
<i>Paracalanus sp.</i>	-	1	-	1	-	1	1	1
Density Unit/L	8	8	8	7	8	8	8	7
No. of genera	6	6	6	6	7	6	7	6

A total of 12 zooplankton genera were recorded in Kandla and Vadinar during the study period. The zooplankton community was mainly composed of *Acartia sp.*, *Amoeba*, *Cladocera sp.*, *Copepod larvae*, and *Diaptomus sp.*, which showed the highest occurrence across stations. From **ME-1 to ME-6** (Kandla), the density of zooplankton ranged between **7 to 8 units/L**. In Vadinar (**ME-7 and ME-8**), the density ranges from **7 to 8 units/L**. At Kandla stations, *Acartia sp.*, *Cladocera sp.*, *Acrolanus sp.*, *Copepod larvae*, and *Diaptomus sp.* were the most frequently observed genera, while *Amoeba*, *Cladocera sp.* and *paracalanus sp.* also had strong representation at Vadinar stations.

The details of Species richness Index and Diversity Index in Zooplankton communities are mentioned in **Table 43**.

Table 43: Species richness Index and Diversity Index in Zooplankton

Indices	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
Taxa S	6	6	6	6	7	6	7	6
Individuals	8	8	8	7	8	8	8	7
Shannon diversity	1.73	1.73	1.73	1.65	1.91	1.73	1.91	1.65
Simpson (1-D)	0.93	0.93	0.93	0.95	0.96	0.93	0.96	0.95
Species Evenness	0.97	0.97	0.97	0.92	0.98	0.97	0.98	0.92
Margalef	2.4	2.4	2.4	2.57	2.89	2.4	2.89	2.57
Berger-Parker	0.25	0.25	0.25	0.29	0.25	0.25	0.25	0.29
Relative abundance	75	75	75	85.71	87.5	75	87.5	85.71

- **Shannon- Wiener's Index (H)** of zooplankton communities was in the range of **1.65 to 1.91** between selected sampling stations from ME-1 to ME-6 with an average value of **1.74**

at Kandla creek and its nearby creeks. While for Vadinar, Shannon Wiener's index of zooplankton communities recorded to be **1.91** at ME-7 and **1.65** at ME-8 with an average value of 1.78. The apportionment of the numbers of individuals among the species observed higher stability at all monitoring location of Kandla and Near SPM (Vadinar).

- **Simpson diversity index (1-D)** of zooplankton communities was ranged between **0.93 to 0.96** at all sampling stations in the Kandla creek and nearby creeks, with an average of **0.96**. Similarly, for Vadinar Simpson diversity index (1-D) of zooplankton communities was **0.96** ME-7 and **0.95** at ME-8 with an average of **0.95**.
- **Margalef's diversity index** (Species Richness) of zooplankton communities in Kandla and nearby creeks sampling stations was varying from **2.40 to 2.89** with an average of **2.51** during the sampling period. While for Vadinar, Margalef's diversity index (Species Richness) of zooplankton communities observed **2.89** at ME-7 and **2.57** at ME-8 with an average value of **2.73**.
- **Berger-Parker Index (d)** of zooplankton communities was in the range of **0.25 to 0.29** between selected sampling stations from ME-1 to ME-6 with an average value of **0.256** at Kandla creek and nearby creeks. Berger-Parker Index (d) of zooplankton communities in the sampling stations of Vadinar, was observed **0.25** at ME-7 and **0.29** at ME-8 with an average value of **0.27**. All the monitoring station signifies a low diversity with an even distribution among the different species.
- The **Species Evenness** is observed in the range of **0.92 to 0.98** for all the six-monitoring station of Kandla whereas, for the Vadinar the species evenness was observed **0.98** at ME-7 and **0.92** at ME-8 the locations, during the monitoring month.
- During the sampling period, **Relative Abundance** of zooplankton communities was in range of **75 to 87.5** between selected sampling stations from ME-1 to ME-6 with an average value of **78.68** at Kandla creek and nearby creeks. Whereas for Vadinar the Index value **87.5** at ME-7 and **85.7** at ME-8 with an average value **86.61**, thus it can be concluded that the studied species is stated as neither highly dominant nor rare.

The details of variation in abundance and diversity in **Benthic organism** are mentioned in **Table 44**.

Table 44: Benthic Fauna variations in abundance and diversity in sub surface sampling

Family/Class	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
Thiaridae	2	1	-	-	1	2	1	-
Mollusca	1	-	2	-	-	1	1	2
Odonata	2	-	1	-	1	-	-	-
Lymnidae	2	1	-	1	-	1	-	-
Planorbidae	-	2	1	2	-	1	-	1

Family/Class	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
Talitridae	-	-	-	-	1	-	1	2
Trochidae	-	1	-	2	-	1	-	1
Atyidae	-	1	1	2	1	-	2	-
Gammaridae	1	-	-	-	-	-	-	-
Portunidae	-	1	1	-	1	-	1	1
Turbinidae	1	1	1	1	-	1	2	-
Palaemonidae	-	-	-	1	2	1	-	2
Density-Units/l	9	8	7	9	7	8	8	9
No of Class	6	7	6	6	6	7	6	6

Few benthic organisms were observed in the collected samples using Van-Veen grabs at Deendayal Port (Kandla and Vadinar). The dominant macro-benthic groups included *Thiaridae*, *Mollusca*, *Planorbidae*, *Trochidae*, *Atyidae*, and *Turbinidae*, which were present across multiple stations. *Turbinidae* was observed at all sites (**ME-1 to ME-8**) except ME-5. While *Atyidae* and *Thiaridae* occurred at most of the locations, indicating their broad distribution. The number of benthic families/classes varied between 6 to 7 across all stations.

At ME-1, the most dominant groups were *Thiaridae*, *Odonata sp.* and *lymnidae* each with a density of **2 units/L**. The least represented benthic fauna included *Mollusca sp.* and *Turbinidae* which was observed only at ME-1 with a Density of **1 units/L**.

The details of Species richness Index and Diversity Index in Benthic Organisms are mentioned in **Table 45**.

Table 45: Species richness Index and Diversity Index in Benthic Organisms

Indices	ME-1	ME-2	ME-3	ME-4	ME-5	ME-6	ME-7	ME-8
Taxa S	6	7	6	6	6	7	6	6
Individuals	9	8	7	9	7	8	8	9
Shannon diversity	1.74	1.8	1.55	1.74	1.55	1.8	1.65	1.74
Simpson 1-D	0.92	0.96	0.95	0.92	0.95	0.96	0.93	0.92
Species Evenness	0.97	0.93	0.87	0.97	0.87	0.93	0.92	0.97
Margalef's	2.28	2.89	2.57	2.28	2.57	2.89	2.4	2.28
Berger-Parker	0.22	0.25	0.29	0.22	0.29	0.25	0.25	0.22
Relative abundance	66.67	87.5	85.71	66.67	85.71	87.5	75	66.67

- **Shannon- Wiener's Index (H)** of benthic organism was in the range of **1.46 to 1.80** between selected sampling stations from ME-1 to ME-6 with an average value of **1.68** at Kandla creek and its nearby creeks. While for Vadinar, Shannon Wiener's index of benthic organism recorded to be **1.65** at ME-7 & **1.74** at ME-8 location with an average value of **1.69**. The apportionment of the numbers of individuals among the species observed higher stability at all monitoring location of Kandla and Vadinar.

- **Simpson diversity index (1-D)** of benthic organism was ranged between **0.92 to 0.96** at all sampling stations in the Kandla creek and nearby creeks, with an average of **0.94**. Similarly, for Vadinar Simpson diversity index (1-D) of benthic organism was **0.93** at ME-7 and **0.92** at ME-8 location with an average of **0.92**.
- **Margalef's diversity index** (Species Richness) of benthic organism in Kandla and nearby creeks sampling stations was varying from **2.28 to 2.89** with an average of **2.58** during the sampling period. While for Vadinar, Margalef's diversity index (Species Richness) of benthic organism observed to be **2.40** at ME-7 and **2.28** at ME-8 location with an average of **2.34**.
- **Berger-Parker Index (d)** of benthic organism was in the range of **0.22 to 0.29** between selected sampling stations from ME-1 to ME-6 with an average value of **0.25** at Kandla creek and nearby creeks. Berger-Parker Index (d) of benthic organism in the sampling stations of Vadinar, was observed to be **0.25** at ME-7 and **0.22** at ME-8 location with an average value of **0.23**. All the monitoring station signifies a low diversity with an even distribution among the different species.
- The **Species Evenness** is observed in the range of **0.87 to 0.97** for all the six-monitoring station of Kandla and for the Vadinar the species evenness is observed in the range of **0.92** at ME-7 and **0.97** at ME-8.
- During the sampling period, **Relative Abundance** of Benthic organisms was **66.67 to 87.5** between selected sampling stations from ME-1 to ME-6 with an average value of **79.96** at Kandla creek and nearby creeks. Whereas for Vadinar the Index value **75** at ME-7 and **66.67** at ME-8 location, with an average value **70.84**, thus it is concluded that the studied species can be stated as neither highly dominant nor rare.

Annexure 1: Photographs of the Environmental Monitoring conducted at Kandla**STP Monitoring****Noise Monitoring****Soil Monitoring****Marine Monitoring****Air Monitoring****Drinking Water Monitoring**

Annexure 2: Photographs of the Environmental Monitoring conducted at Vadinar

Source: GEMI



Gujarat Environment Management Institute (GEMI)

(An Autonomous Institute of Government of Gujarat)

'An ISO 9001:2015, ISO 14001:2015 & ISO 45001:2018 Certified Institute

Head Office

Plot No. B 246 & 247, G.I.D.C. Electronic Estate,
Sector-25, Gandhinagar-382024

Laboratory

Plot No. B-64, G.I.D.C. Electronic Estate,
Opp. I.P.R., Sector-25, Gandhinagar-382025

Tel: (+91) 79-23240964 (O), T: (+91) 79-23287758 (Lab), F: (+91) 79-23240965


E-mail: info-gemi@gujarat.gov.in | Website: www.gemi.gujarat.gov.in

"We Provide Environmental Solutions"

Annexure - B

DEENDAYAL PORT AUTHORITY

(Erstwhile: DEENDAYAL PORT TRUST)



www.deendayalport.gov.in

ISO 9001-2015 &
ISO 14001-2015 Certified Port

Administrative Office Building
Post Box NO. 50
GANDHIDHAM (Kutch).
Gujarat: 370 201.
Fax: (02836) 220050
Ph.: (02836) 220038

CivilEng./Pipeline/4778/CAAQMS/2025 | 27

Dated: 24/06/2025

To,
The Gujarat Institute of Desert Ecology (GUIDE),
P.O.Box No. 83,
Opp. Changleshwar Temple, Mundra Road,
Bhuj (Kachchh)-370 001,
Gujarat (India).
E-mail: desert_ecology@yahoo.com

Kind Attention: Dr. V. Vijay Kumar, Director, M/s GUIDE, Bhuj.

Sub: "Monitoring of Ambient Air Quality in the Port Area of Deendayal Port Authority through Continuous Ambient Air Quality Monitoring System (CAAQMS)"-Work Order reg.

Ref: GUIDE, Bhuj proposal vide letter No. GUIDE/DPA/CAAQMS/450/2024-25 dated 21/05/2025

Sir,

The proposal submitted by GUIDE, Bhuj for the subject work vide above referred letter dated 21/05/2025 (**copy Attached-Annexure A**) for the work "**Monitoring of Ambient Air Quality in the Port Area of Deendayal Port Authority through Continuous Ambient Air Quality Monitoring System (CAAQMS)**" amounting to **Rs. 9,27,63,504.00 plus applicable GST (Rupees Nine Crores Twenty-Seven Lakhs Sixty-Three Thousand Five Hundred and Four Only)** for the scope of work, time period, including all terms & conditions mentioned in the proposal, has been accepted by the Competent Authority of DPA.

1) Brief Scope of work:

- a) To conduct site suitability assessment for installation of two CAAQMS including civil work, power supply, data connectivity in consultation with DPA.
- b) To Install Two CAAQMS at identified locations by DPA with all related components comprising of sensors, analysers, data acquisition system at identified locations, ensuring proper positioning for Accurate Air Quality Monitoring.
- c) To establish a real-time data transmission system to integrate with Pollution Control Boards for continuous remote monitoring.
- d) To conduct routine maintenance schedules and periodic calibrations to ensure uninterrupted operations of the equipment's.
- e) To formulate a detailed inception plan comprising of relevant technical specifications of the equipment's, monitoring frequency, proposed site details for installation of equipment's, connectivity with/to Pollution Control Boards.
- f) To document the monitored data on monthly basis.

- g) Data will be transmitted to State and Central Pollution Control Boards
- h) Broad Scope of work is as per **Annexure A**

2) Payment terms:

- * 25% of contract price against submission of Inception Report and successful installation & commissioning of two CAAQMS System at identified Location.
- * Balance 75% of contract Price: Monthly payment on Pro Rata basis for a period of 36 months

3) Deliverables:

- Inception report comprising of relevant technical specifications of the equipment's, monitoring frequency, proposed site details for installation of equipment's, connectivity with/to Pollution Control Boards.
- Installation of two (2) CAAQMS at proposed site
- Operations and maintenance of two installed CAAQMS for a period of 36 months
- Monthly submission of reports for a period of three years depicting the operations and output of online Continuous Ambient Air Quality Monitoring System including Wind Rose plot.

4) Time Period:

- 1. For submission of Inception report & successful installation & commissioning of Two CAAQMS system at DPA:** – 60 days from the date of receipt of Work Order
- 2. Operations & Maintenance of two CAAQMS:** 36 months after successful commissioning of CAAQMS.
3. Kindly sent the acceptance of this work order & start the work w.e.f 01/07/2025

Kindly send the acknowledgment of this Work Order.

Thanking you.

Yours faithfully,


Dy. Chief Engineer & EMC(I/c)
Deendayal Port Authority

Annexure - C



GPCB

GUJARAT POLLUTION CONTROL BOARD

PARYAVARAN BHAVAN

Sector 10-A, Gandhinagar 382010

Phone : (079) 23226295

Fax : (079) 23232156

website : www.gpcb.gov.in

By R.P.A.D

In exercise of the power conferred under section-25 of the Water (Prevention and Control of Pollution) Act-1974, under section-21 of the Air (Prevention and Control of Pollution)-1981 and Authorization under rule 6(2) of the Hazardous and Other Waste (Management and Transboundary) Rules, 2016 framed under the Environmental (Protection) Act-1986. This Board is empowered to Grant CC&A.

And whereas Board has received consolidated consent application inward no. 310134 dated 23/04/2024 for the **Consolidated Consent and Authorization (CC & A)** of this Board under the provisions / rules of the aforesaid Acts. Consents & Authorization are hereby granted as under:

CONSENTS AND AUTHORISATION:

(Under the provisions /rules of the aforesaid environmental acts)

To,

M/s. Deendayal Port Trust, (ID-56985),
Kandla Port Trust land, A.Q. Building,
P.O. Box no. 50,
Tal: Gandhidham,
Dist: Kutch - 370 201.

1. Consent Order No. AWH-136469 Date of issue: 20/08/2024.

2. The consents shall be valid upto 22/04/2029 for the use of outlet for the discharge of treated effluent and emission due to operation of industrial plant for manufacturing of the following items/ products:

Sr. no.	Facility	Capacity
1	Water front facilities of oil jetties liquid cargo, edible oil, fertilizer & good grains etc. & development of the land.	Only Jetty no. 8 with capacity of 3.5 MMTPA

Subject to specific condition:

1. Industry shall comply with all condition of Environment Clearance granted by MoEF & CC, New Delhi vide letter no. 10-1/2017-IA-III dated 20/11/2020 & CRZ Clearance vide letter no. ENV-10-2018-24-T cell dated 30/07/25020.
2. Industry shall comply with PESO permission issued by competent authority and renew PESO permission time to time & submit a copy of the same to this office.
3. Industry shall comply with Manufacturing, Storage and Import of Hazardous Chemicals Rules – 1989 framed under the Environment (Protection) Act-1986 including site notification of competent authority for isolated storage & submit acknowledge copy of onsite emergency plan & third party safety audit report time to time.

Page 1 of 6

(Signature)
Clean Gujarat Green Gujarat

ISO - 9001 - 2008 & ISO - 14001 - 2004 Certified Organisation

4. No ground water shall be withdrawal without prior permission from CGWA as per of Hon. NGT order.
5. Industry shall obtain fresh water from valid source have permission of the competent authority.
6. Industry shall renew Public Liability Insurance Policy time to time & submit a copy of the same to this office.
7. Industry shall manage Solid Wastes generated from industrial activities as per Solid Waste Management Rules-2016 (solid waste as defined in Rule-3(46)).
8. Industry shall ensure that there shall be no damage to the existing mangrove patches near site and also ensure the free flow of water to avoid damage to the mangroves.
9. Industry shall ensure as per EC condition that no creeks or rivers are blocked due to any activities at the site and free flow of water is maintained.
10. Industry shall provide proper system for collection, storage & treatment & disposal of waste water generated by vessel as per MARPOL& maintain records.
11. Industry shall install storm drainage catch basin to avoid directly discharge into surface water.
12. Waste effluent accumulated with port activities including storm water & sewage from port operation including sewage ballast water, bilge water & clean waste water from ships shall be as per MARPOL norms.
13. Industry shall make separate records regarding generation, collection, transportation& disposal of waste generation from ship & maintain its records.
14. Industry shall made necessary arrangement for the plastic Waste, Solid Waste or other waste generation due to port activities & for facilitation of reception facilities under MARPOL & Environment (Protection) Act-1986 rules etc.
15. Ports shall obtain approval of their oil spill contingency plan (OSCP) as required under national oil spill disaster contingency plan (NOS-DCP) of coast guard, ministry of defense, govt. of India.
16. Best environmental practices by ports maybe uploaded on "Indian ports Association" as well as the same maybe linked to websites of CPCB and respective SPCBs.
17. Manually handling of cargo should be converted into mechanized system, in time bound manner.

3. CONDITIONS UNDER THE WATER ACT:

- 3.1 Source of Water:- GWSSB.
- 3.2 There shall no industrial water consumption & industrial waste water generation from manufacturing process and other ancillary operations.
- 3.3 The quantity of the fresh water consumption for domestic purpose shall not exceed 20 KL/Day.
- 3.4 The quantity of domestic waste water (Sewage) shall not exceed 4-5 KL/Day (only for jetty no. 8).
- 3.5 The domestic sewage shall be disposed of into soak pit/septic tank.
- 3.6 Disposal system for storm water shall be provided separately. In no circumstances storm water shall be mixed with the industrial effluent.



4. CONDITIONS UNDER THE AIR ACT:

4. **CONDITIONS UNDER THE AIR ACT:**

- 4.1. There shall be no use of fuel hence there shall be no flue gas emission from manufacturing process and other ancillary operations.
- 4.2. There shall be no process gas emission from manufacturing process and other ancillary operations.
- 4.3. The concentration of the following parameters in the ambient air within the premises of the industry shall not exceed the limits specified hereunder as per National Ambient Air Quality Standards issued by MoEF & CC dated 18th November-2009. In addition to following parameters Industry shall also carry out AAQ monitoring of all other applicable parameter as per MoEF notification dated 18/11/2009 and submit the report to the Board.

Sr. No.	Pollutant	Time Weighted Average	Concentration in Ambient air in $\mu\text{g}/\text{M}^3$
1.	Sulphur Dioxide (SO_2)	Annual 24 Hours	50 80
2.	Nitrogen Dioxide (NO_2)	Annual 24 Hours	40 80
3.	Particulate Matter (Size less than $10 \mu\text{m}$) or PM_{10}	Annual 24 Hours	60 100
4.	Particulate Matter (Size less than $2.5 \mu\text{m}$) or $\text{PM}_{2.5}$	Annual 24 Hours	40 60

4. Particulate Matter
(Size less than 2.5 μm) or PM_{2.5} 24 Hours

4.4. The applicant shall provide portholes, ladder, platform etc at chimney(s) for monitoring the air emissions and the same shall be open for inspection to/and for use of Board's staff. The chimney(s) vents attached to various sources of emission shall be designed by numbers such as S-1, S-2, etc. and these shall be painted/ displayed to facilitate identification.

4.5. The industry shall take adequate measures for control of noise levels from its own sources within the premises so as to maintain ambient air quality standards in respect of noise to less than 75dB(A) during day time and 70 dB (A) during night time. Daytime is reckoned in between 6a.m. and 10 p.m. and nighttime is reckoned between 10 p.m. and 6 a.m.

**5. AUTHORIZATION as per HAZARDOUS AND OTHER WASTE (MANAGEMENT AND
DISPOSAL) RULES, 2016 Form-2 [See rule 6 (2)]**

Form for grant of authorization for occupier or operator handling Hazardous waste
Form No. 2, dated 10/08/2016, date of Issue: 20/08/2024.

5.1 Authorization order No:-AWH- 136469 date of Issue: 20/08/2024.

5.2 **M/s. Deendayal Port Trust**, is hereby granted an authorization based on the enclosed signed inspection report for generation, collection, treatment, storage, transport of hazardous waste on the premises situated at Kandla Port Trust land, A.O. Building, P.O. box no. 50, Tal: Gandhidham, Dist: Kutch.

A.O. Building, P.O. box no. 50, Tal: Gandhidham, Dist: Kutch.				
Sr. No	Waste	Quantity per Annum	Schedule/ Category	Facility
1	Used/ Spent Oil	1100 MT	I-5.1	Collection, storage, transportation & disposal by selling to registered recyclers

- 5.3 The authorization shall be valid upto 22/04/2029.
- 5.4 The authorization is subject to the conditions stated below and such other conditions as may be specified in the rules from time to time under the Environment (Protection) Act-1986.
- 5.5 The authorization is granted to operate a facility for collection, storage within factory premises transportation and ultimate disposal of Hazardous wastes as per condition no.5.2 to the industry having valid CCA of this Board.

5.6 TERMS AND CONDITIONS OF AUTHORISATION

1. The applicant shall comply with the provisions of the Environment (Protection) Act-1986 and the rules made there under.
2. The authorization or its renewal shall be produced for inspection at the request of an officer authorized by the Gujarat Pollution Control Board.
3. The persons authorized shall not rent, lend, sell, and transfer or otherwise transport the hazardous wastes without obtaining prior permission of the Gujarat Pollution Control Board.
4. Any unauthorized change in personnel, equipment or working conditions as mentioned in the authorization order by the persons authorized shall constitute a breach of this authorization.
5. The person authorized shall implement Emergency Response Procedure (ERP) for which this authorization is being granted considering all site specific possible scenarios such as spillages, leakages, fire etc. and their possible impacts and also carry out mock drill in this regard at regular interval of time;
6. The person authorized shall comply with the provisions outlined in the Central Pollution Control Board guidelines on "Implementing Liabilities for Environmental Damages due to Handling and Disposal of Hazardous Wastes and Penalty"
7. It is the duty of the authorized person to take prior permission of the Gujarat Pollution Control Board to close down the facility.
8. An application for the renewal of an authorization shall be made as laid down in rules 6(2) under Hazardous and Other Waste Rules, 2016.
9. The imported hazardous and other wastes shall be fully insured for transit as well as for any accidental occurrence and its clean-up operation.
10. The record of consumption and fate of the imported hazardous and other wastes shall be maintained.
11. The hazardous and other wastes which gets generated during recycling or reuse or recovery or pre-processing or utilization of imported hazardous or other wastes shall be treated and disposed of as per specific conditions of authorization.
12. The importer or exporter shall bear the cost of import or export and mitigation of damages if any.
13. Any other conditions for compliance as per the Guidelines issued by the Ministry of Environment, Forest and Climate Change or Central Pollution Control Board from time to time.
14. The waste generator shall be totally responsible for (i.e. collection, storage, transportation and ultimate disposal) the wastes generated.





GUJARAT POLLUTION CONTROL BOARD
PARYAVARAN BHAVAN
Sector 10-A, Gandhinagar 382010

Phone : (079) 23226295
Fax : (079) 23232156
website : www.gpcb.gov.in

15. Records of waste generation, its management and annual return shall be submitted to Gujarat Pollution Control Board in Form-4 by 30th day of June of every year for the preceding period April to March.
16. In case of any accident, details of the same shall be submitted on Form-11 to Gujarat Pollution Control Board.
17. As per "Public Liability Insurance Act-91" company shall get Insurance Policy, if applicable.
18. Empty drums and containers of toxic and hazard material shall be treated as per guideline published for "Management & Handling of discarded containers". Records of the same shall be maintained and forwarded to Gujarat Pollution Control Board regularly.
19. In case of transport of hazardous wastes to a facility for (i.e. treatment, storage and disposal) existing in a State other than the State where hazardous wastes are generated, the occupier shall obtain 'No Objection Certificate' from the State Pollution Control Board or Committee of the concerned State of Union Territory Administration where the facility exists.
20. Unit shall take all concrete measures to show tangible results in waste generation, reduction, avoidance, reuse and recycle. Actions taken in this regard shall be submitted within three months and also along with Form-4.
21. Industry shall have to display the relevant information with regards to hazardous waste as indicated in the Hon. Supreme Court's Order in W.P. No.657 of 1995 dated 14th October, 2003.
22. Industry shall have to display on-line data outside the main factory gate with regard to quantity and nature of hazardous chemicals being handled in the plant, including wastewater and air emissions and solid hazardous wastes generated within the factory premises.

6 SPECIFIC CONDITIONS:-

- 6.1 The authorized actual user of hazardous and other wastes shall maintain records of hazardous and other wastes purchased in a passbook issued by the State Pollution Control Board along with the authorization.
- 6.2 Handling over of the hazardous and other wastes to the authorized actual user shall be only after making the entry in the passbook of the actual user.
- 6.3 In case of renewal of authorization, a self-certified compliance report in respect of effluent, emission standards and the conditions specified in the authorization for hazardous and other wastes shall be submitted to SPCB.
- 6.4 The occupier of the facility shall comply Standard operating procedure/guidelines published by MOEF&CC or CPCB or GPCB from time to time.
- 6.5 Unit shall comply provisions of E-Waste Management Rules-2016.
- 6.6 The disposal of Hazardous Waste shall be carried out as per the waste Management hierarchy.
- 6.7 The occupiers of facilities shall not store the hazardous and other wastes for a period not exceeding **ninety days**. Prior permission of the Board shall be obtained for extension of the storage period.

Page 5 of 6

Clean Gujarat Green Gujarat

ISO - 9001 - 2008 & ISO - 14001 - 2004 Certified Organisation

- 6.8 The occupier shall maintain the records of generation, sale, storage, transport, recycling, co processing and disposal of hazardous waste and make available during the inspection.
- 6.9 The transportation of the hazardous waste shall be carried out in GPS mounted dedicated vehicles.

7 **GENERAL CONDITIONS: -**

- 7.1 Any change in personnel, equipment or working conditions as mentioned in the consents form/order should immediately be intimated to this Board.
- 7.2 Applicant shall also comply with the general conditions given in annexure I.
- 7.3 Whenever due to accident or other unforeseen act or ever, such emissions occur or is apprehended to occur in excess of standards laid down such information shall be forthwith reported to Board, concerned Police Station, Office of Directorate of Health Service, Department of Explosives, Inspectorate of Factories and local body.
- 7.4 In case of failure of pollution control equipments, the production process connected to it shall be stopped. Remedial actions/measures shall be implemented immediately to bring entire situation normal.
- 7.5 The Environmental Management Unit/Cell shall be setup to ensure implementation on and monitoring of environmental safeguards and other conditions stipulated by statutory authorities. The Environmental Management Cell/Unit shall directly report to the Chief Executive of the organization and shall work as a focal point for internalizing environmental issues. These cells/units also coordinate the exercise of environmental audit and preparation of environmental statements.
- 7.6 The Environmental audit shall be carried out yearly and the environmental statements pertaining to the previous year shall be submitting to this State Board latest by 30th September every year.
- 7.7 The Board reserves the right to review and/or revoke the consent and/or make variations in the conditions, which the Board deems, fit in accordance with Section 27 of the Act.
- 7.8 In case of change of ownership/management the name and address of the new owners/ partners/directors/proprietor should immediately be intimated to the Board.
- 7.9 Industry shall have to display the relevant information with regard to hazardous waste as indicated in the Hon. Supreme order in w.p. no. 657 of 1995 dated 14th October 2003.

For and on behalf of
GUJARAT POLLUTION CONTROL BOARD



(T. C. Patel)
Unit Head

Date:- /08/2024

NO: PC/CCA-KUTCH-1524/GPCB ID-56985/

Issued to:

M/s. Deendayal Port Trust, (ID-56985),
Kandla Port Trust land, A.O. Building,
P.O. Box no. 50,
Tal: Gandhidham,
Dist: Kutch - 370 201.

Page 6 of 6